


Log file saving in SuperPro 7100

In Superpro 7100, user can save the operations including MAC address read from Gainspan module to a text file (log file).

Click File- Option->Log file in Superpro 7100 menu bar, following window will pop up:

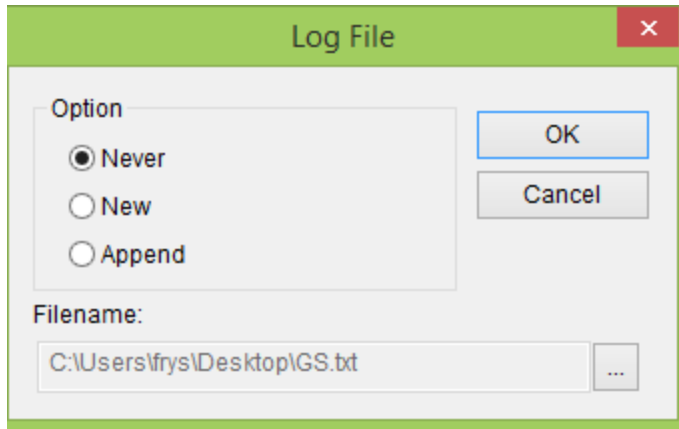

Never: Log file feature is not used and current log information is never saved.


New: Create a new log file and overwrite the contents of any such log file with same name.

Append: Add information into the current log file. If a log file already exists, then add new information at the end of current log file.


In following example, we will show how to save current log to GS.txt log file on desktop.

Step 1: Load Project file GS2011.prj or any other project by clicking Project->Load project


Step 2: Click File- Option->Log file in Superpro 7100 menu bar, following window will pop up:

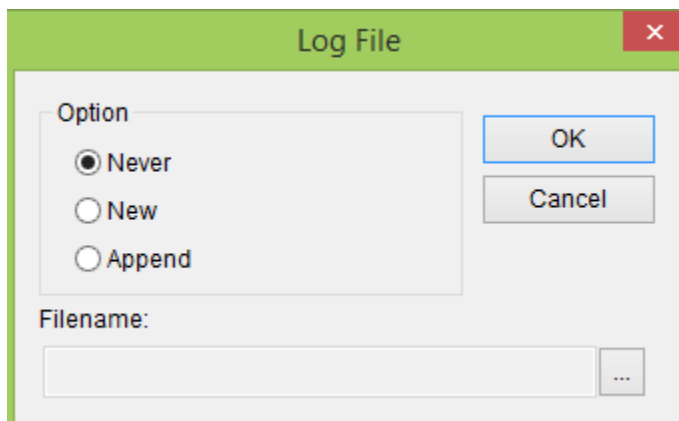

Step 3: Select Append and browse to a file GS.txt on desktop and click OK

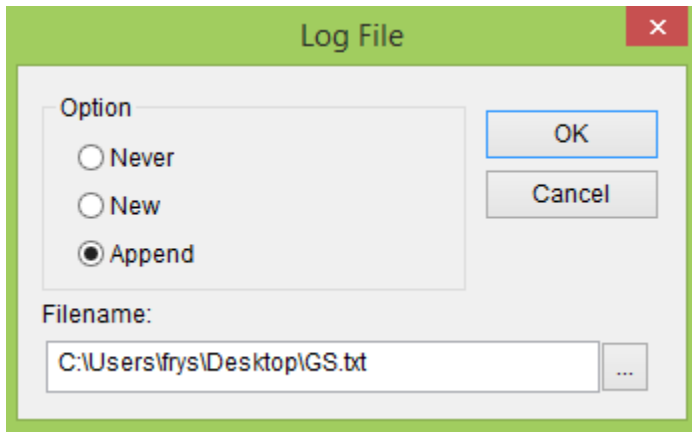

Step4: Whenever user clicks save (as shown below) or closes SuperPro 7100 software, log information will be saved to GS.txt.

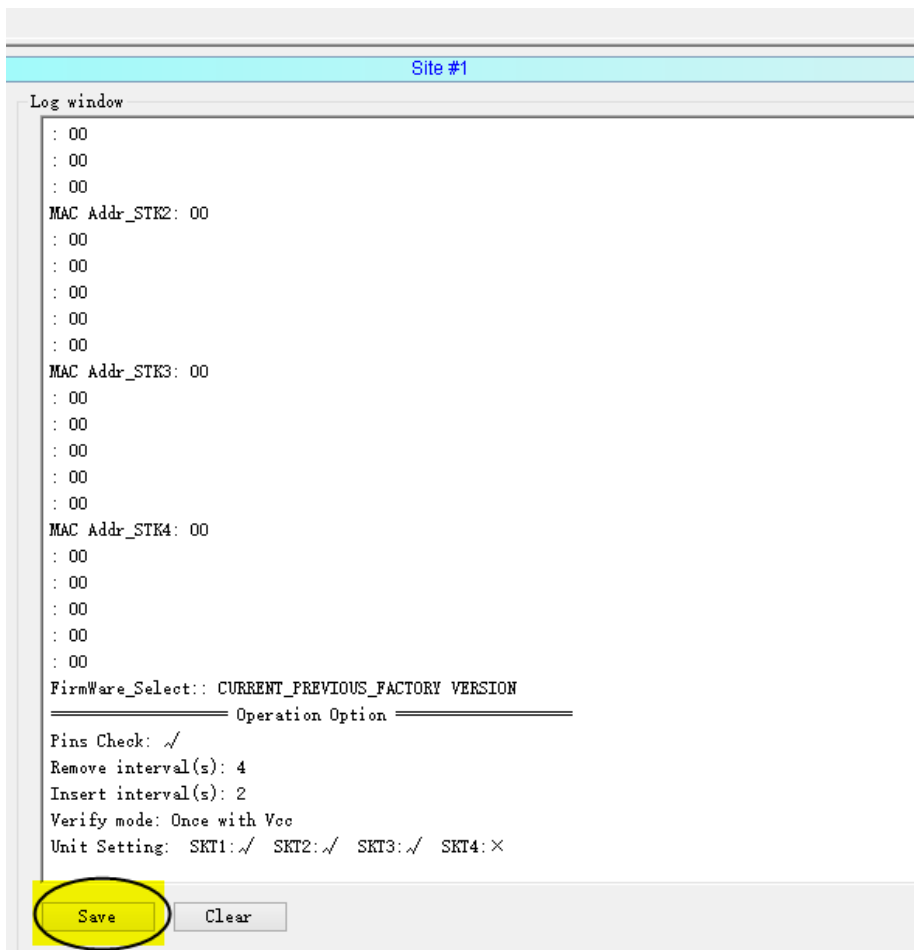

For further information, please contact techsupport@xeltek.com