


NUMBER
C-380306

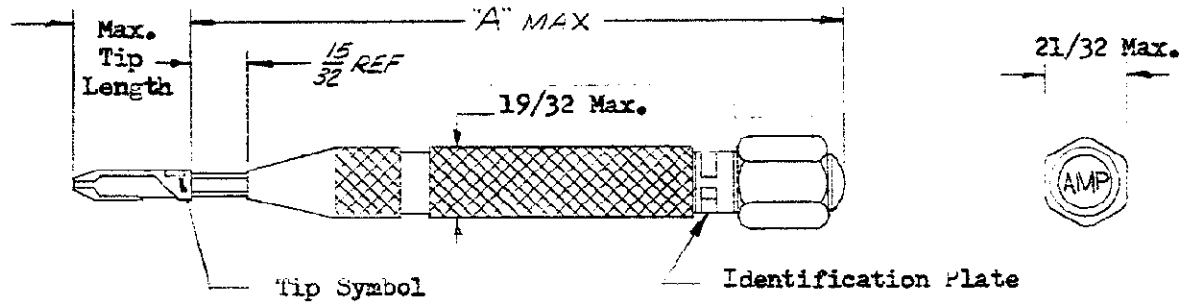

Tool Number	Trip Force	Tip Number	Tip Symbol	Tip Length	"A" Length
* 380306-1	20-22	395005	F	25/32	5 7/16
380306-2	12-13	395005	F	25/32	5 7/16
380306-3	12-13	395012	G	1 5/32	5 7/16
* 380306-4	20-22	395012	G	1 5/32	5 7/16
380306-5	9-10	395005	F	25/32	5 7/16
380306-6	9-10	395112	K	1 5/32	5 7/16
* 380306-7	20-22	380301-1	A1	1 23/32	5 7/16
380306-8	16-18	380301-1	A1	1 23/32	5 7/16
380306-9	12-13	380366-1	C1	1 5/32	5 7/16
1-380306-0	9-10	380339-1	B1	1 3/32	5 7/16
1-380306-1	20-22	395012	G	1 5/32	4 11/16

* 20-22 pound tool to be used exclusively for inserting terminals into receptacles mounted in resilient material. APPLICATION TOOLING ENGR'G. CONNECTOR PRODUCTS DIV.

1. For Tool usage, see Instruction Sheet # 7075 .
2. For Tip dimensions, see Tip Customer Drawing.
3. For readjustment or replacement of parts other than Tips, return Tool to AMP, Inc., Mt. Joy, Penna. to insure proper calibration.
4. Trip force is the force in pounds, required to trip the tool.

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

PRINT DIST
136

				© 1960 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		CUSTOMER COPY REFERENCE ONLY	
				MATERIAL AND FINISH		AMP INCORPORATED HARRISBURG, PENNA.	
J-3 Loc M wts 2 P ₂ - 8/14/62				Steel-Plated; Aluminum Weight 3 1/2 ± 1/2 Oz.			
J-2 ADDED -11 4 DED 10/14/62				WIRE RANGE INSULATION		CLASS <u>11</u>	
J-1 ADDED 20-22 NOTE YES LCH 2/22/63				TOLERANCE EXCEPT AS NOTED ± .015 ± 1° 0'		TYPE <u>11</u>	
J REV. & REDRAWN YES NK 1/15/63				LOC <u>M</u> NO <u>A</u>		NO <u>C-380306</u> REV <u>J3</u>	
LTR REVISION RECORD DR CHK DATE DR <u>ES Smith</u> 12/18/62 DE <u>CH Hill</u> 1/5/63 CHK <u>H. ...</u> 1-12-63 APP <u>...</u> 1/15/63				NAME TOOL-STANDARD CERTI-LOK INSERTION			