
т	വ	н <b>т</b>	m	0





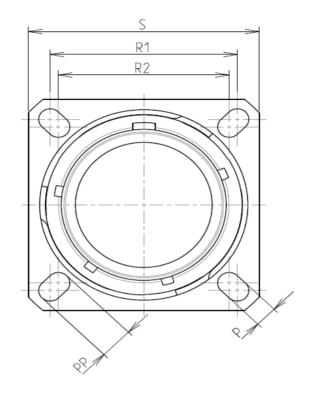

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 15

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	<sub>∶</sub> -65°C to +175°C				
-Salt Spray	: 500 hours				

: 20.01 g ± 10%

8D 0

G

15

W

97

А


F

А

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.39±0.2			
R1	24.61			
R2	23.01			
S	31±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M22x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

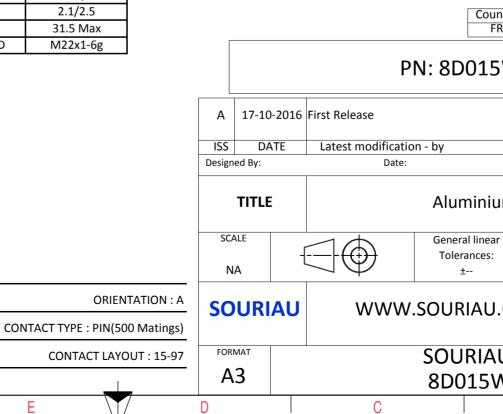

	Φ			A		
						4
AS EXA	AMPLE					3
whice er of t adatio untry R	non-conformit th does not co he Parties or to n, technical no Jurisd	mply wi by a thir otice.)	th d party	List		2
					MOD N°	-
		CUST	OMER DI	RAWING		
um	m Receptacle 8D series					
ar	NPRDS / PROJECT <b>859</b>					1
I.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	U DRG N° SHEET					
W9	7AA-C			Λ	1/2	J
	В		I	A		

r		۵	г П	m		0
		Contact Layout				Panel Cutout
4		$\begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & & \\ & & & \\ & & & \\ & & & & \\ & & & & \\ & & & \\$			1	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Contract position ID  X-axis (mm)    A  +.065 (1.65)    B  +.178 (4.52)    C  +.230 (5.44)    D  +.178 (4.52)    E  +.065 (1.65)    F 069 (2.26)	Contacts (Insert arrangement 15-97)    ation  Contact position  Location    Y-axis  (mm)  (mm)  (mm)    +234 (5:94)  G  -207 (5:26)  -096 (2:41)    +178 (4:52)  H  -234 (5:94)  +055 (1:65)  -023 (1:56)    -023 (0:58)  J  -178 (4:52)  +178 (4:52)  +178 (4:52)    -178 (4:52)  K  -065 (1:65)  +234 (5:94)  -047 (1:19)  +081 (2:06)    -235 (5:97)  M  +047 (1:19)  -081 (2:06)  -081 (2:06)	_		۲ ۲	
ω		umber of contacts  Size contacts  Service rating  Contact location  Superseder    4  16  I  C, G, L, M  MS20052-9    8  20  I  All others  MS20052-9	_			Dim ØA ØAA R1
						ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
N						Country FR PN: 8D015W
						16 First Release
					ISS DATE Designed By:	Latest modification - by Date:
					SCALE	Aluminium
<u> </u>					NA	Tolerances:
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D015W9
l	Н	G	F	E	D	C

