

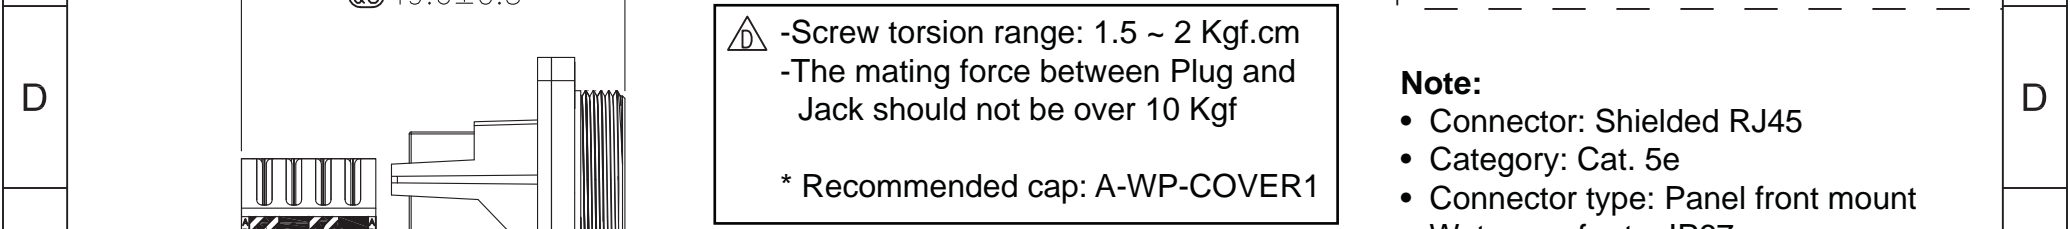
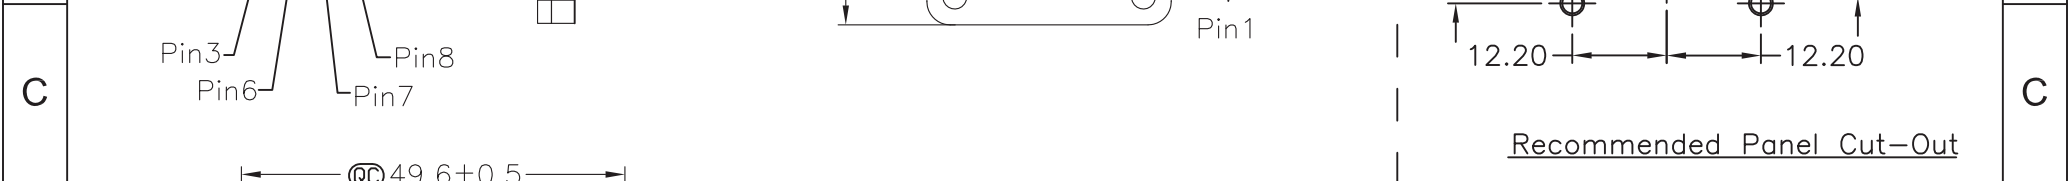
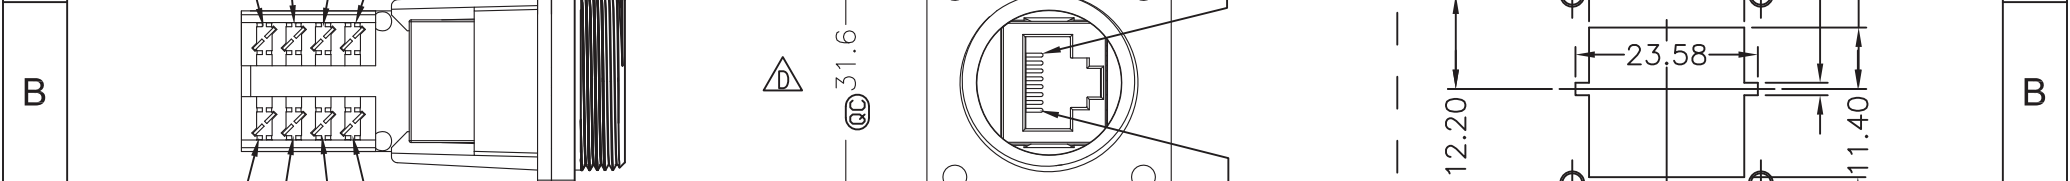
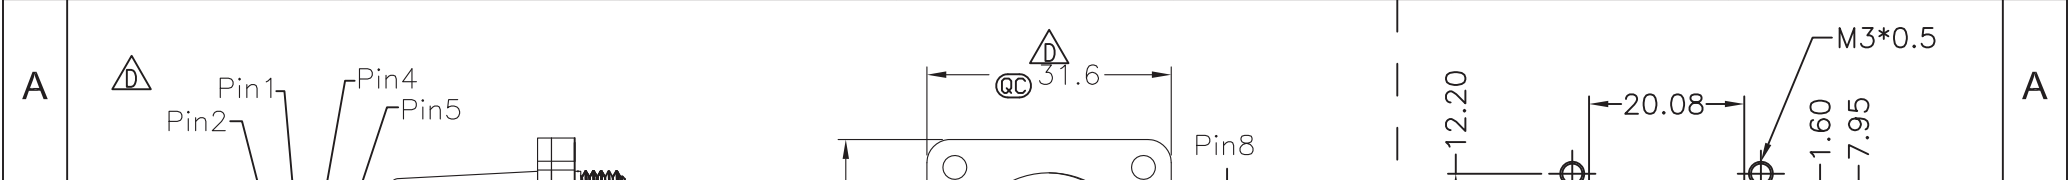


1 2 3 4 5 6 7

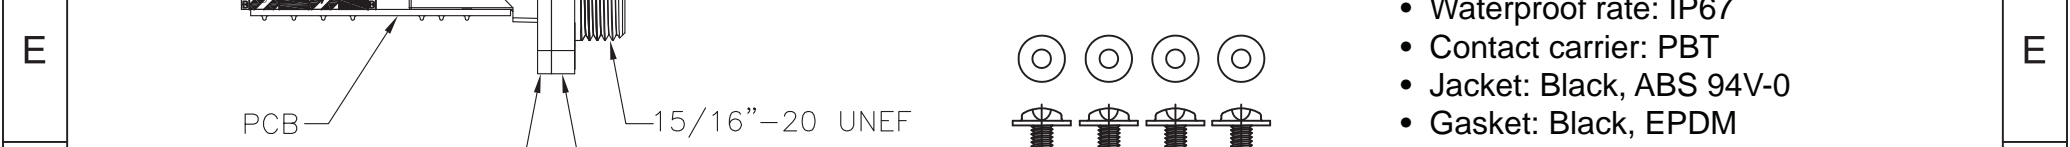

⚠ -Screw torsion range: 1.5 ~ 2 Kgf.cm
 -The mating force between Plug and Jack should not be over 10 Kgf
 * Recommended cap: A-WP-COVER1

- Note:**
- Connector: Shielded RJ45
 - Category: Cat. 5e
 - Connector type: Panel front mount
 - Waterproof rate: IP67
 - Contact carrier: PBT
 - Jacket: Black, ABS 94V-0
 - Gasket: Black, EPDM
 - Screw: Stainless
 - Contact pin: Copper alloy
 - Contact surface: Gold plated
 - Temperature range: -20°C to 60°C



G	Scale	Free				Date	Name	Title Waterproof Modular Panel Mount Jack Keystone to Punch type, Shielded
	TOLERANCE					Drawn	25.09.13	
	X.X	±0.25				Approved	25.09.13	Groll
	X.X	±0.10						
	X.XX	±0.05						ASSMANN WSW-No. A-RJ45KS
	DIM	TOL						Drawing-No.
	X.°	±1°						
	X.X°	±X°	①	Updated all information	25.09.13	Wilson		rev01
	Angle	TOL	Id.	Modification	Date	Name		Sheet

Unit: mm



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
 Toll Free: 1-877-277-6266 • Email: info@assmann.us



1 2 3 4 5 6 7