


1. CHARACTERISTICS

OPERATING FORCE	1.96N (200gf) MAX
RELEASE FORCE	0.49N (50gf) MIN
PRETRAVEL	1.2 mm MAX
OVER TRAVEL	1.0 mm MIN
MOVEMENT DIFFERENTIAL	0.3 mm MAX
OPERATING POSITION	14.7 ± 0.4 mm

- CONTACT ARRANGEMENT
SINGLE POLE SINGLE THROW
- ELECTRICAL RATINGS
16A 1/2HP 125 250 VAC ~
0.1A 125 VDC ---
16(3)A 250 V~

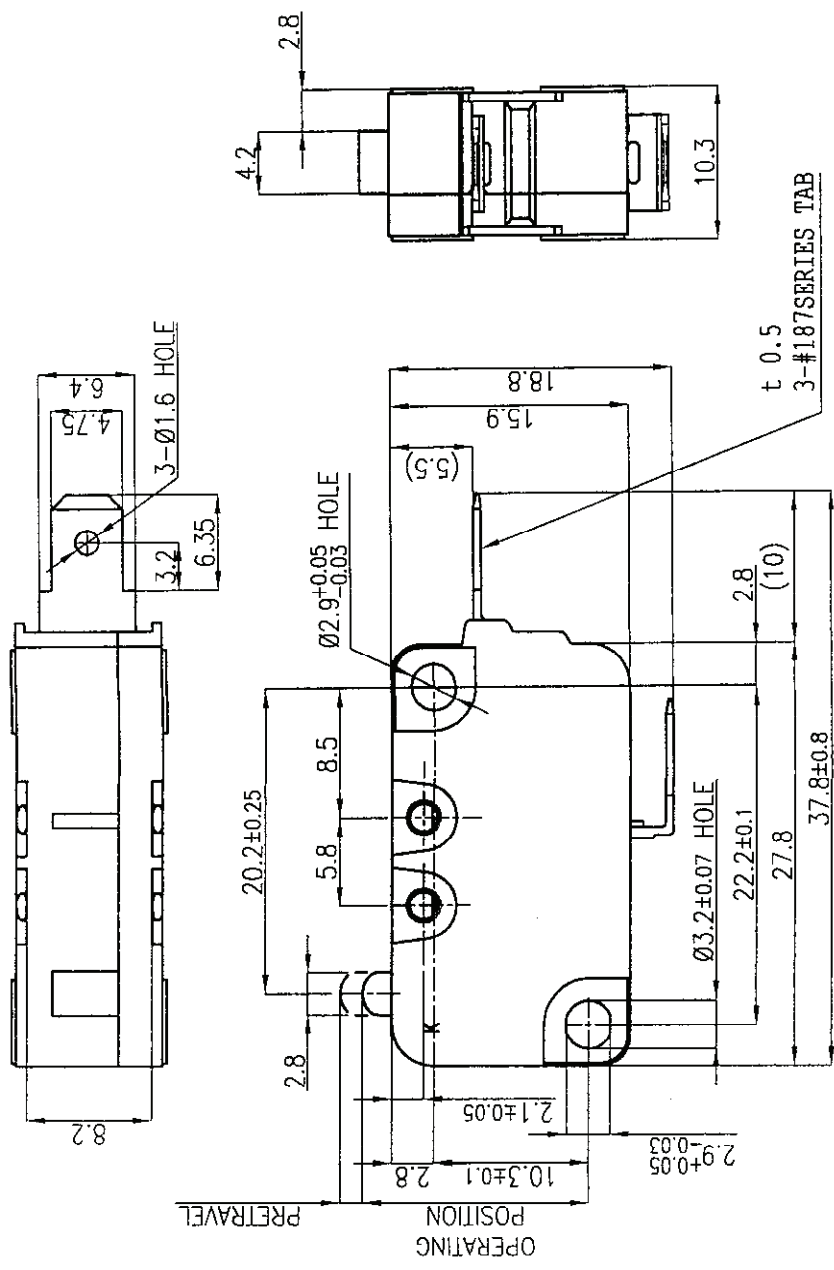

TYPE D3V-16G-2C25-K MINIATURE BASIC SWITCH OUTLINE DRAWING		SCALE 2 : 1	3RD ANGLE SHEET	DRWG NO. 9425548-6 A	DESIGNED FOR D3V
MATERIAL	FINISH	TOLERANCES UNLESS SPECIFIED ±0.4	DESIGNED 10.20.2010 EFUL	CHECKED <i>[Signature]</i> 20/10 APPR	APPROVED <i>[Signature]</i> 20/10
SYM	DATE	E/C CONTENTS	E/C NO.	EFUL	SIGN
Δ	10.20.10	NEW RELEASE	PESH-COS-10X21-BAFAPV	EFUL	

