



RECOMMENDED MOUNTING PADS



CIRCUIT: SPST

CONTACT CONFIGURATION

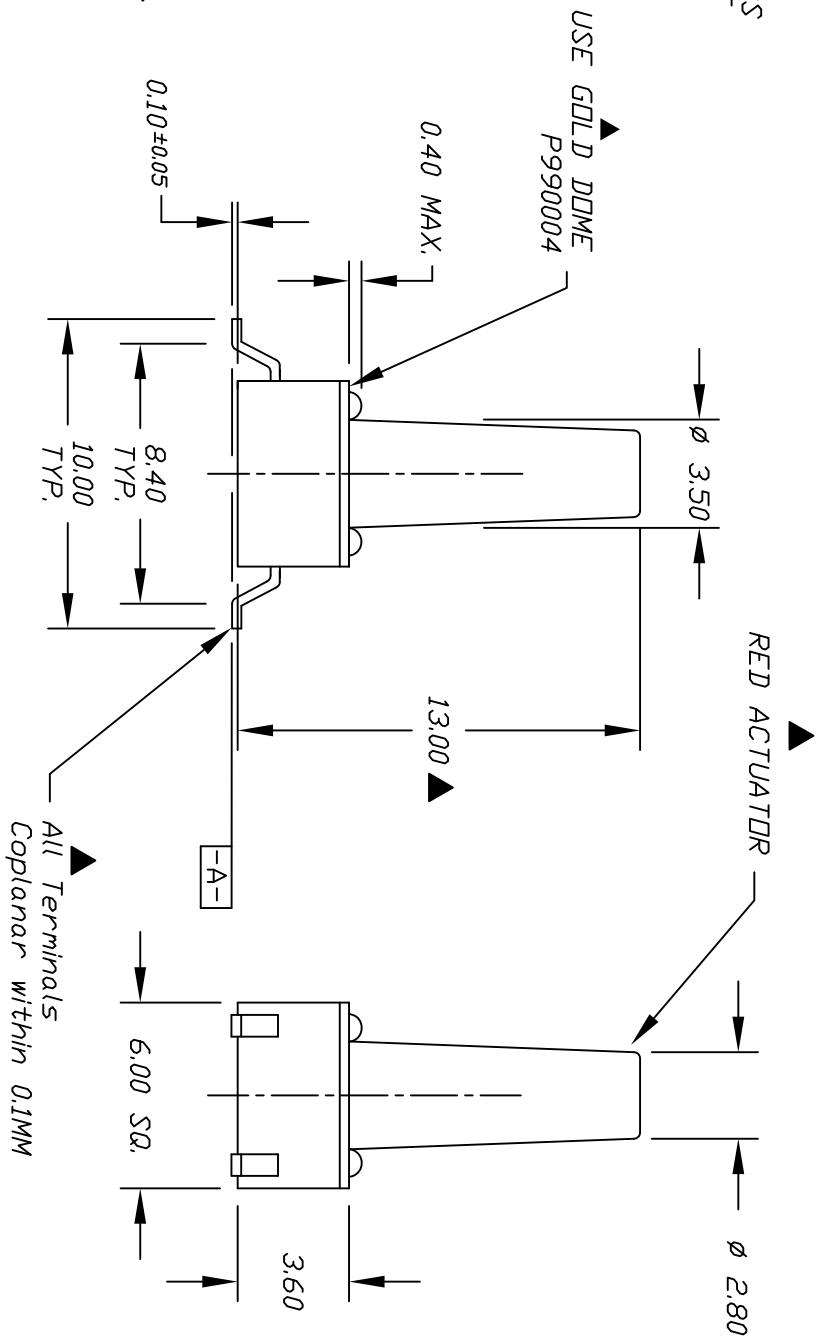

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 50mA, @12V DC.
 5. CONTACT MATERIAL: GOLD
 6. CONTACT RESISTANCE: 100 milliohms Max.
 7. ELECTRICAL LIFE: 100,000 CYCLES MIN.
 8. TRAVEL: 0.25mm ±0.10mm
 9. OPERATING FORCE: 250±50gf
 10. BODY & STEM: HIGH TEMP. PLASTIC
 11. ▲ DENOTES CRITICAL PARAMETER
 12. PACKAGING: 250 PER TAPE & REEL
 13. 2002/95/EC (ROHS) COMPLIANT

D	21080	250/REEL WAS 200/REEL	3/22/13	EBP						
C	18318	PACKAGING NOTE REVISED	11/13/08	BLR						
B	15513	ADD PACKAGING, DOME, EDIT FORCE	11/9/05	PH						
A	11537	RELEASED FOR PRODUCTION	6/7/01	CJB						
REV.	ECN	DESCRIPTION	DATE	CHKD						
					SCALE	DATE	DR	DWG	REV	
					4:1	11/13/08	BLR	P010616	D	
					TITLE: TL3301 D F250 R G (RED ACTUATOR) 					
					THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					