
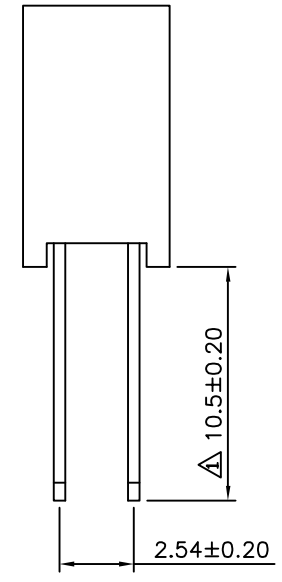
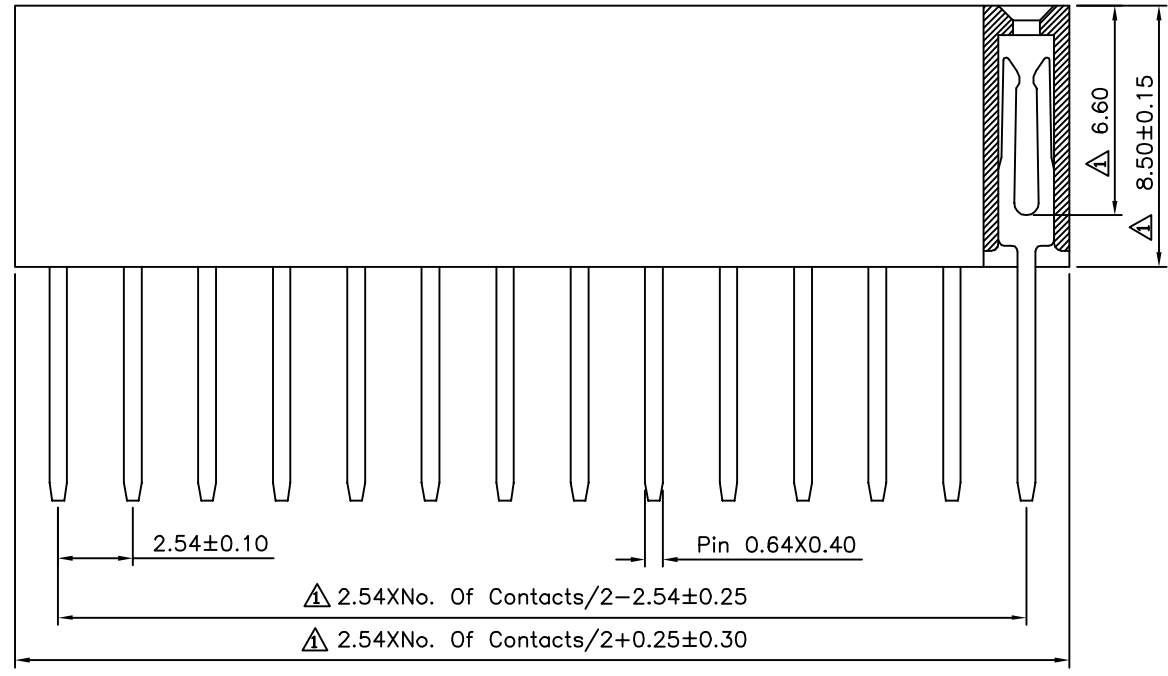


△ Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

△ SPECIFICATION
 Current Rating:3.0 Amp
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 Insulator:PBT+30%G.F.(UL94V-0),Black
 RoHS Compliant

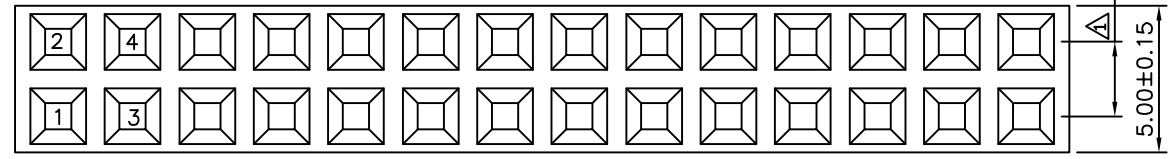

△ $2.54 \times \text{No. of Contacts} / 2 - 2.54 \pm 0.25$
 △ $2.54 \times \text{No. of Contacts} / 2 + 0.25 \pm 0.30$

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
18507		EMILY		
		CHECKED BY HZF		
		DRAWING BY SONG		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	06/22/2011
△ A0		NEW RELEASE	HZF	02/08/2007