



# Intrinsically safe pressure switches EEx ia II C T6

LCIE approval  
no. 93 C 6015X

- Conform to the Low Voltage Directive
- Can be used without enclosure according to IEC 664-1 pollution group III



1

## Part numbers

Fixing		<b>81 513 530</b>	
		DIN rail 35 mm	
		EN 50022	
Function	control	pressure	
Version	manual override	with	

## Symbol



## Characteristics

Permitted fluids	air, inert gases and liquids		●
Adjustable switching pressure (* set at 0.3)	bar	2 to 8	
Hysteresis	at 1 bar	0.5	
	at 2 bars	0.6	
	at 4 bars	0.8	
	at 6 bars	1	
Pressure indicator			●
Temperature	operating ° C	- 10 + 50	
	of fluid ° C	- 10 + 30	
Mechanical life	operations	10 <sup>6</sup>	
Maximum voltage	V	60 Vdc	
Construction	POM, brass, AU4G		●
Weight	g	48	
Degree of protection	IEC 529	IP 20	

## Pneumatic connections


	Push-in connection for semi-rigid tubing		●
Connection	Ø 4 mm (NFE 49100)		●
	Tapped holes 1/8 BSP		—

## Electrical connections

	Integral electrical connections		●
Screw terminals	number	3 (1-2-4)	
Wire cross-section	mm <sup>2</sup>	0.75	
Terminal capacity	mm <sup>2</sup>	3	

## Dimensions

81 513 530

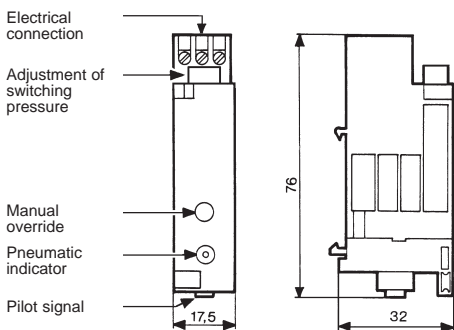

## Other information

On request :

- Low pressure version from 0.2 to 1.2 bars
- Vacuum version adjustable from -0.3 to -1 bar

## To order, specify :

Standard products

1

Reference

Example : Intrinsically safe pressure switches -  
81 513 530

Products and specifications subject to change without notice.

Consult factory for application assistance.

204 Airline Drive, Suite 300, Coppell, Texas 75019 / Tel: (888) 778-2733 / FAX: (888) 329-9773 / www.crouzet-usa.com