


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₀	RELEASED	6/1/95	<i>M.M.</i>

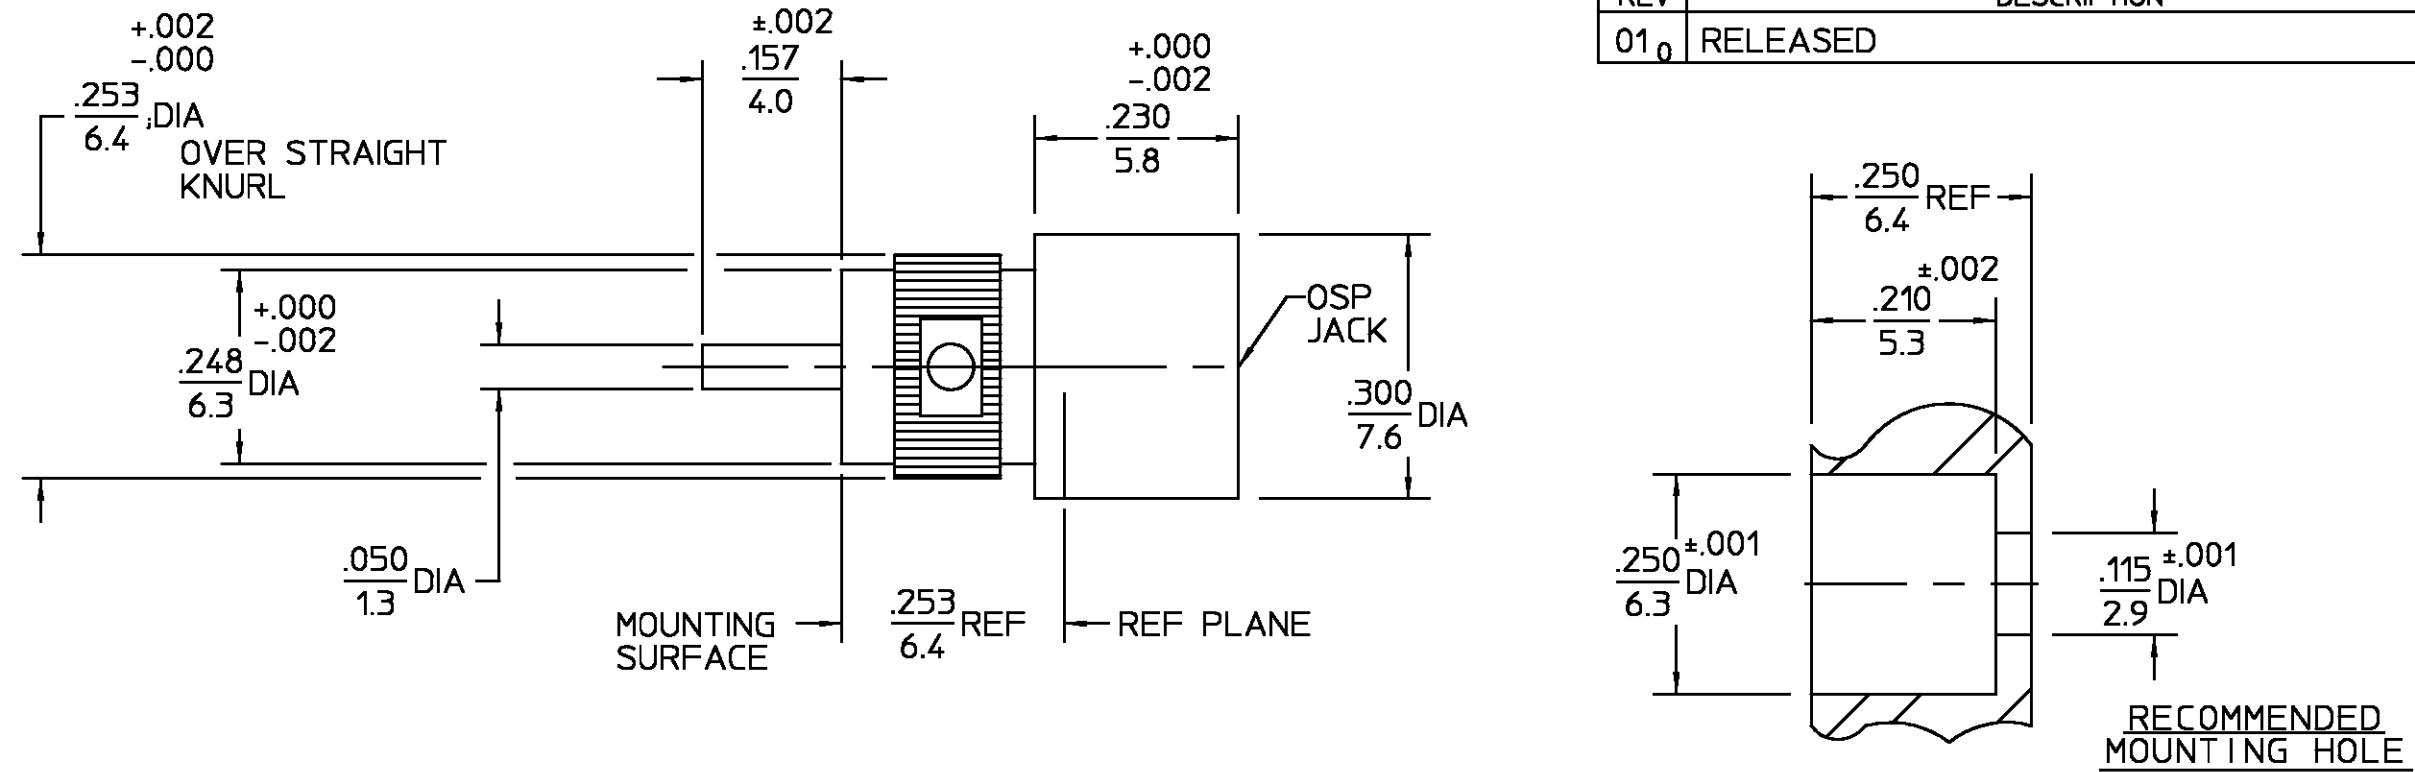

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	HOUSING	MATERIAL	FINISH
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions <u>PER M/A-COM CATALOG</u>	Temperature Rating <u>-65° to +125°C</u>	DIELECTRIC	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER ASTM-A380
Frequency Range (GHz) DC to <u>18</u>	Mating Characteristics:	Vibration MIL-STD-202, Method 204, Condition D	CENTER CONTACT	TFE FLUOROCARBON PER ASTM-D-1457	N/A
Volt Rating (VRMS MAX) @ Sea Level <u>500</u>	Insertion (MAX Lbs) <u>3</u>	Shock MIL-STD-202, Method 213, Condition I	CONTACT SLEEVE	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
VSWR <u>1.05+0.005f(GHz)</u>	Withdrawal (MIN Oz) <u>1</u>	Thermal Shock MIL-STD-202, Method 107, Condition B	CONTACT RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	GOLD PLATE PER MIL-G-45204
Insertion Loss (dB MAX) <u>.03x√f(GHz)</u>	Force to Engage (In-Lbs MAX) <u>3</u> & Disengage (In-Lbs MAX) <u>15</u>	Moisture Resistance MIL-STD-202, Method 106	COMPONENT		
RF Leakage (dB MIN) (Interface Only, Fully Mated) <u>-(90-f(GHz))</u>	Center Contact Captivation Axial (Lbs) <u>6</u>	Corrosion - MIL-STD-202, Method 101, Condition B	MATERIAL		
Corona, 70,000 Ft (VRMS MIN) <u>335</u>	Cable Retention Axial Force (Lbs MIN) <u>N/A</u>		FINISH		
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>1000</u>	Torque (In-Oz MIN) <u>N/A</u>				
Contact Resistance (Milliohms MAX)	Weight (Grams) <u>TBD</u>				
Center Contact <u>2.0</u>					
Outer Contact <u>2.0</u>					
Cable to Housing <u>N/A</u>					
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>1000</u>					
LR.(Megohms MIN) <u>5000</u>					
		<u>.XXX = in</u> <u>XX.X = mm</u>	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± °	DRAWN BY <u>JANUAR</u> DATE <u>6/1/95</u>	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
			These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	CHECKED BY	
				APPD BY	
			USE ASS'Y PROCEDURE		
			NO. AP. <u>N/A</u>		
				TITLE <u>OSP PANEL FEEDTHRU JACK RECEPTACLE STRAIGHT TERMINAL</u>	
				SIZE <u>B</u>	
				CODE IDENT NO. <u>26805</u>	
				<u>4558-5336-02</u>	
				REV <u>01₀</u>	
				SCALE <u>5:1</u>	
					SHEET 1 OF 1