


8-Outlet Foldable Power Strip with 1 Pivot, 120V, 12A, 15-ft. Cord, 5-15P, 24 in.

MODEL NUMBER: PSF2408

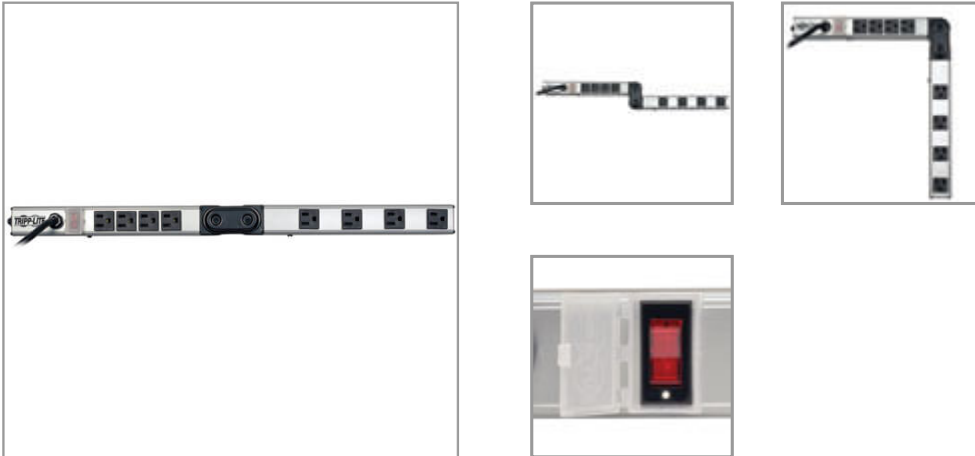

Foldable design is ideal for using around corners and tight spaces, by multiple users, or anywhere you need a flexible power strip that can fold in half to accommodate multiple environments.

Description

The PSF2408 provides a 12-amp, 120v power strip with 8 standard NEMA 5-15 outlets in a rugged, all-metal, mountable housing that folds in the middle. It allows for both vertical and horizontal mounting with additional mounting clips to ensure the pivot stays in place. The PSF2408 is ideal for a variety of uses including office, rack-mount, workbench, industrial and telecom applications. With a NEMA 5-15P, 15-ft. power cord, you don't have to install it next to outlets you already have; it can be mounted across the room and deliver reliable power where you need it most. With a foldable center pivot, the PSF2408 can go around corners, be used by more than 1 person, and fit in smaller spaces. A lighted and covered On/Off switch helps prevent accidental shut-offs, while a 12-amp circuit breaker guards against dangerous circuit overloads. Its sturdy all-metal extruded aluminum housing stands up to demanding network, laboratory or factory environments.

Features

Multi-Outlet, Foldable Power Distribution

Vertical or Horizontal Moun

Extra Long Power Cord

Premium Safety Features

Heavy-Duty Housing

Specifications

Highlights

- Foldable, single pivot 24-in mountable housing
- 8 standard NEMA 5-15R outlets and a 15 ft. power cord
- Lighted, covered On/Off switch and 12-amp circuit breaker
- Sturdy construction and heavy-duty, all-metal housing

Package Includes

- PSF2408
- Mounting hardware
- Instruction manual



| OVERVIEW | |
|--|--|
| UPC Code | 037332187529 |
| OUTPUT | |
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (8) 5-15R |
| Output (Watts) | 1500 |
| Circuit Breaker (amps) | 12 |
| Outlet Spacing | 1.18 in 1st segment and 2.25 in second segment |
| Right-Angle Outlets | No |
| INPUT | |
| Nominal Input Voltage(s) Supported | 120V AC |
| Input Connection Type | Nema 5-15P |
| Input Plug Features | Black |
| Input Cord Length (ft.) | 15 |
| Input Cord Length (m) | 4.57 |
| Input Cord Gauge Type | 14/3 SJT |
| Voltage Compatibility (VAC) | 120 |
| USER INTERFACE, ALERTS & CONTROLS | |
| Switches | Lighted 2 position switch controls power to all outlets |
| Locking Switch Cover | Transparent on/off switch cover prevents accidental turn-off |
| PHYSICAL | |
| Shipping Dimensions (hwd / in.) | 2.40 x 4.40 x 27.50 |
| Shipping Dimensions (hwd / cm) | 6.10 x 11.18 x 69.85 |
| Shipping Weight (lbs.) | 0.28 |
| Shipping Weight (kg) | 0.13 |
| Unit Dimensions (hwd / in.) | 1.26 x 1.62 x 24.94 |
| Unit Dimensions (hwd / cm) | 3.20 x 4.11 x 63.65 |
| Unit Weight (lbs.) | 2.88 |
| Unit Weight (kg) | 1.31 |
| Material of Construction | Aluminum |
| Included Mounting Accessories | Includes mounting clips |
| Receptacle Color | Black |



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

| | |
|-------------------------------------|---|
| Color (AC Line Cord) | Black |
| Form Factors Supported | Supports vertical or horizontal mounting in rack enclosures, raceways and a variety of other applications |
| CERTIFICATIONS | |
| Certifications | UL 60950 |
| cUL / CSA (Canada) | Yes |
| WARRANTY | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>