

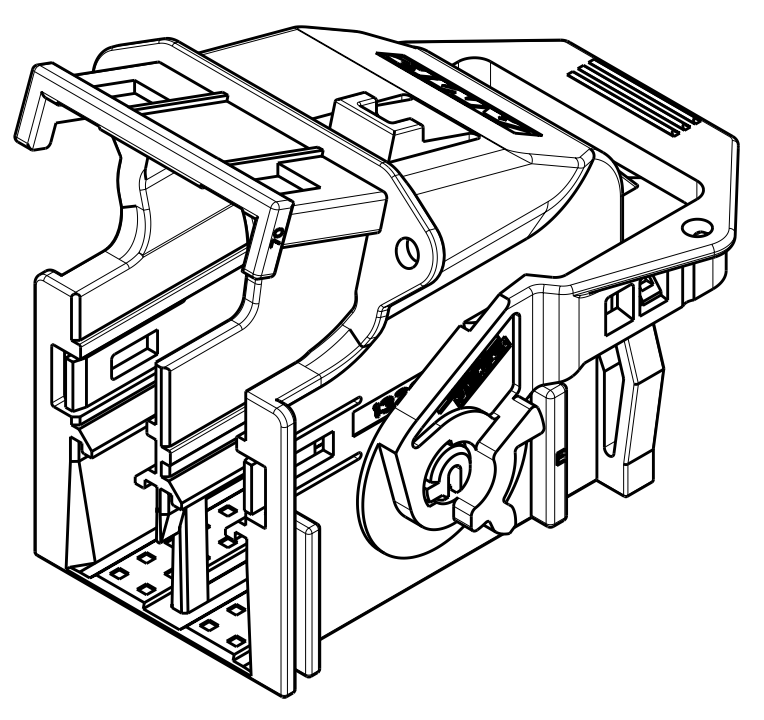


LOC	DIST	REV	DATE	BY	CHK	APPV
FX	00	B	21SEP2010	DLD	CJS	
		B1	22MAR2011	DLD	CJS	



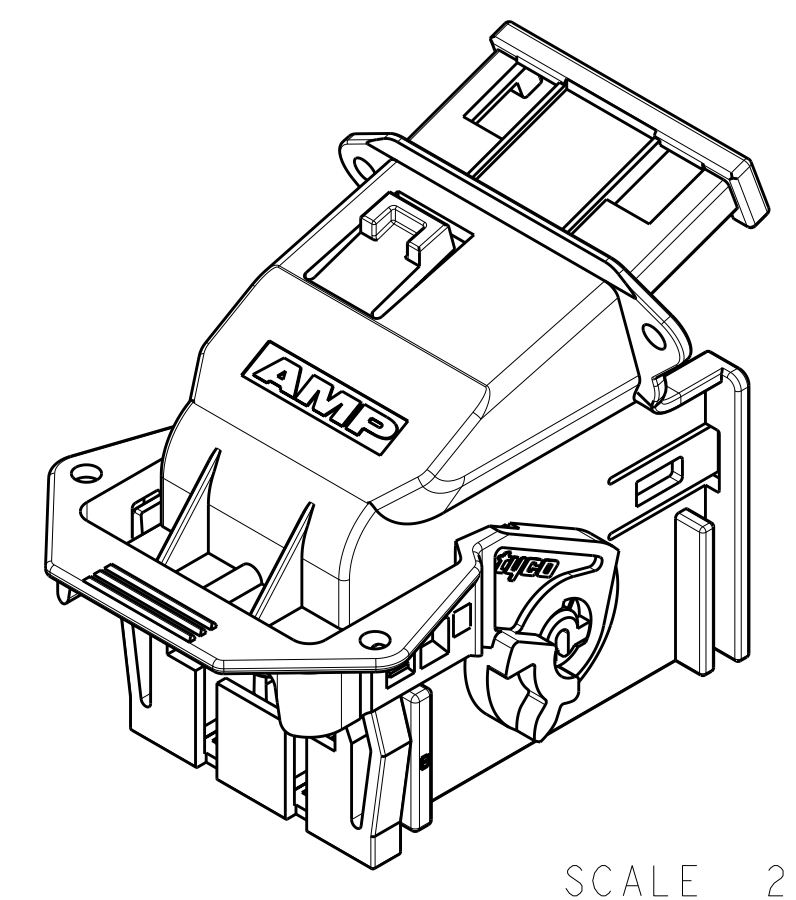


SCALE 2:1

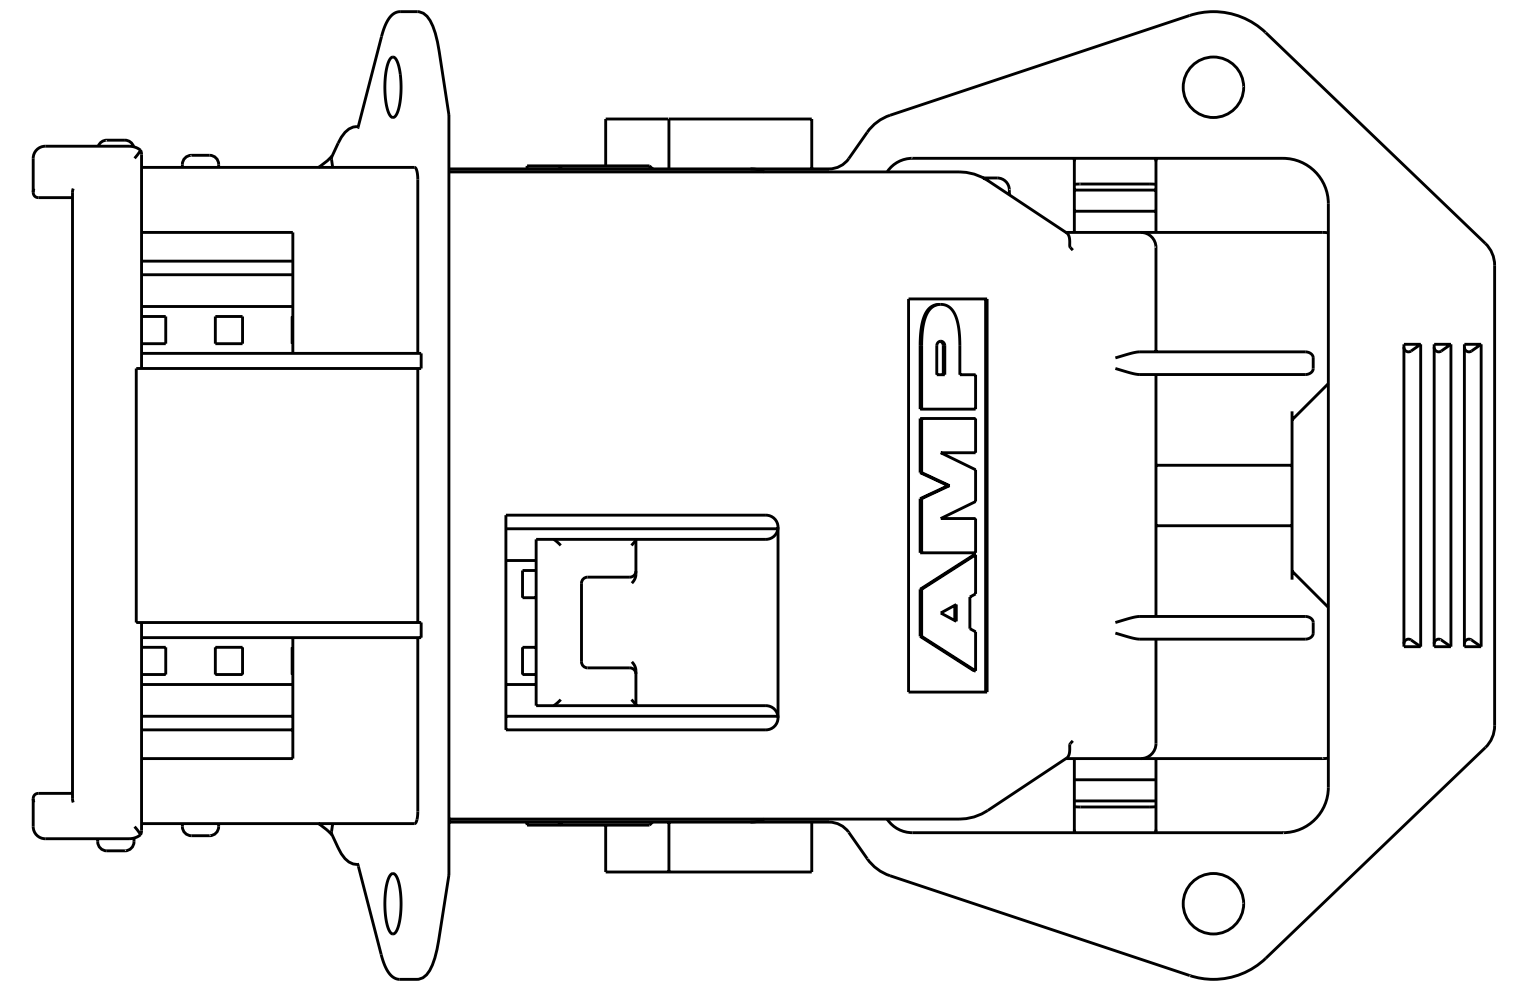


SCALE 2:1

- 1. MATERIAL: SHIELD - 35% GLASS REINFORCED NYLON. SEE TABLE BELOW FOR COLOR. LEVER - 35% GLASS REINFORCED NYLON. COLOR: DARK GREY.
- 2. ANTI-SCOOPING FEATURE OPTIONAL CONSTRUCTION.
- 3. REFERENCE: RECEPTACLE HOUSING, 1326042-1 & 1326042-2, USED WITH THIS ASSEMBLY.
- 4. REFERENCE: INTERFACE DETAIL PER DRAWING NO. AUAUTO1000-2962-0010 AND TE DRAWING NO. 1438985-GEN.
- 5. REFER TO INSTRUCTION SHEET 408-8662 FOR PRODUCT ASSEMBLY AND DISASSEMBLY PROCEDURES.
- 6. REFER TO USCAR-2 REV 3 APRIL 2001 FOR PRODUCT SPECIFICATIONS.

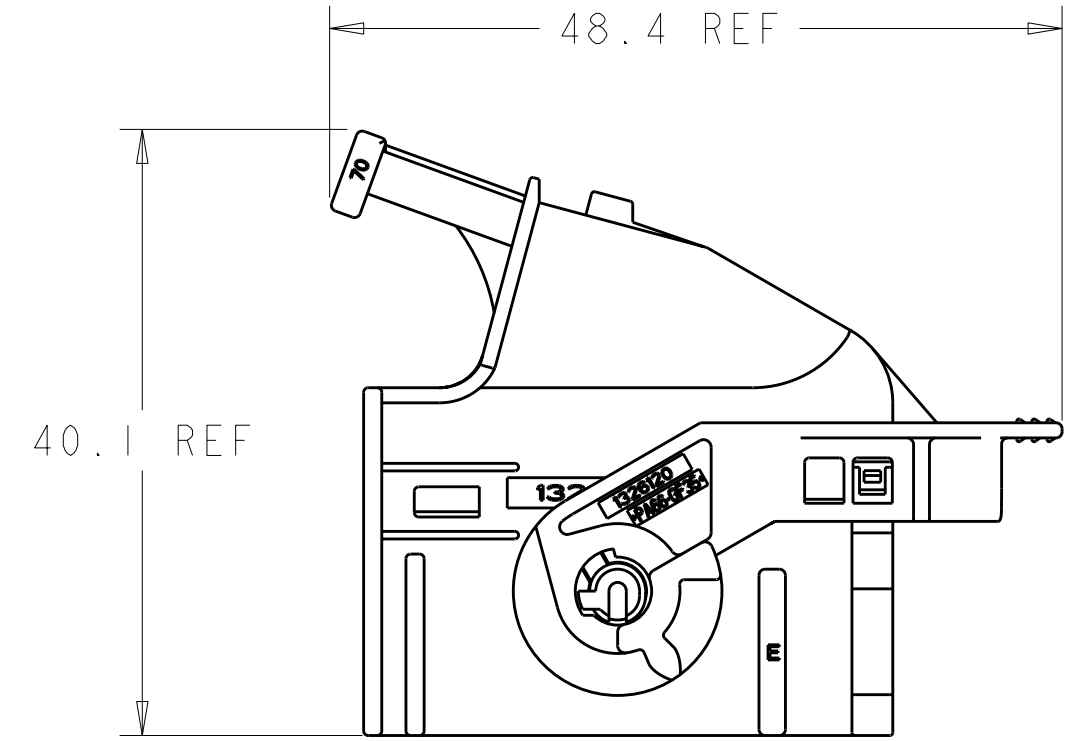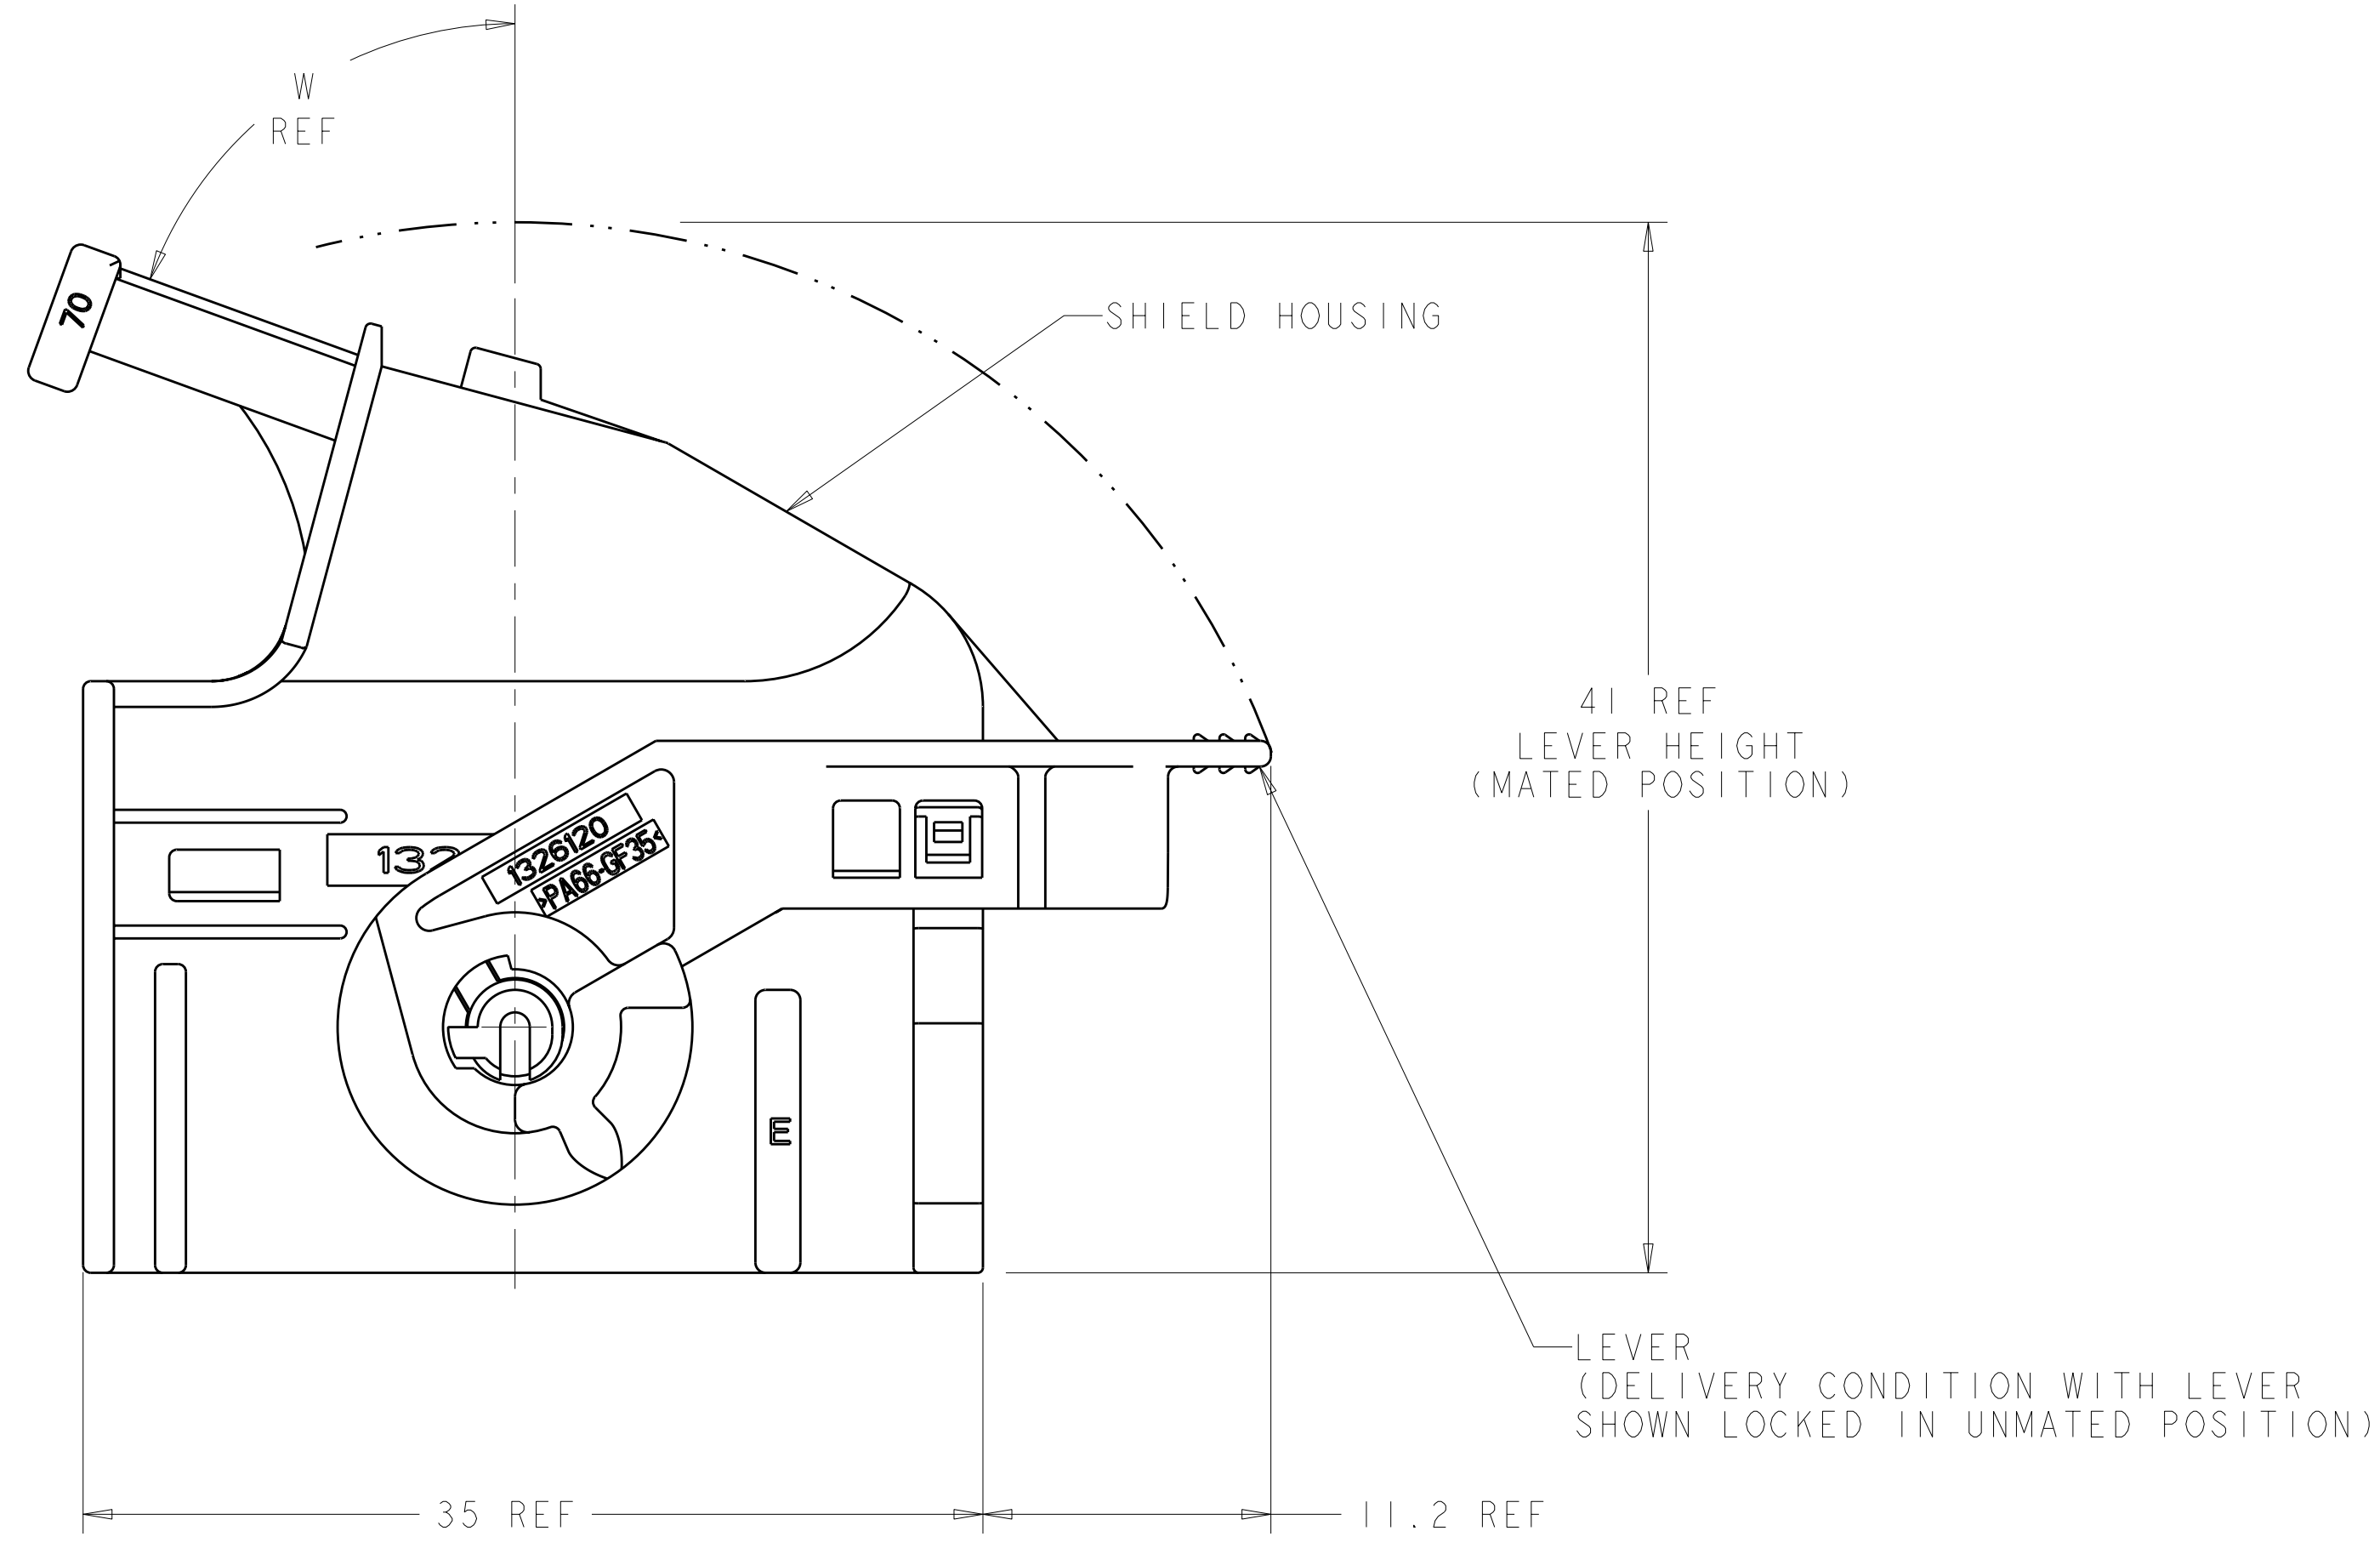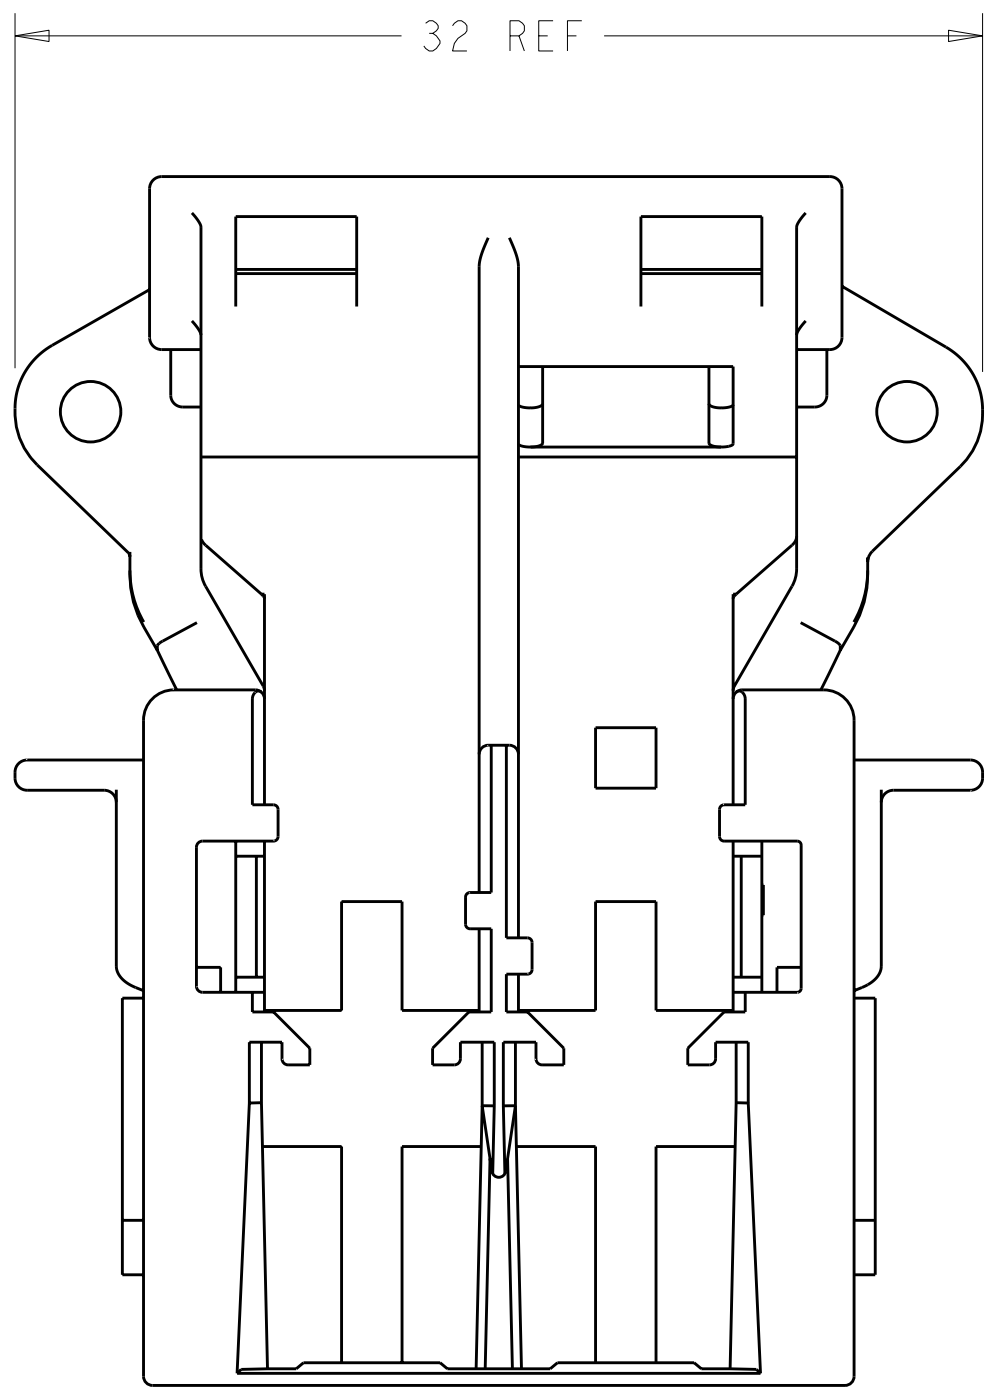


70° WIRE EXIT  
SCALE 2:1

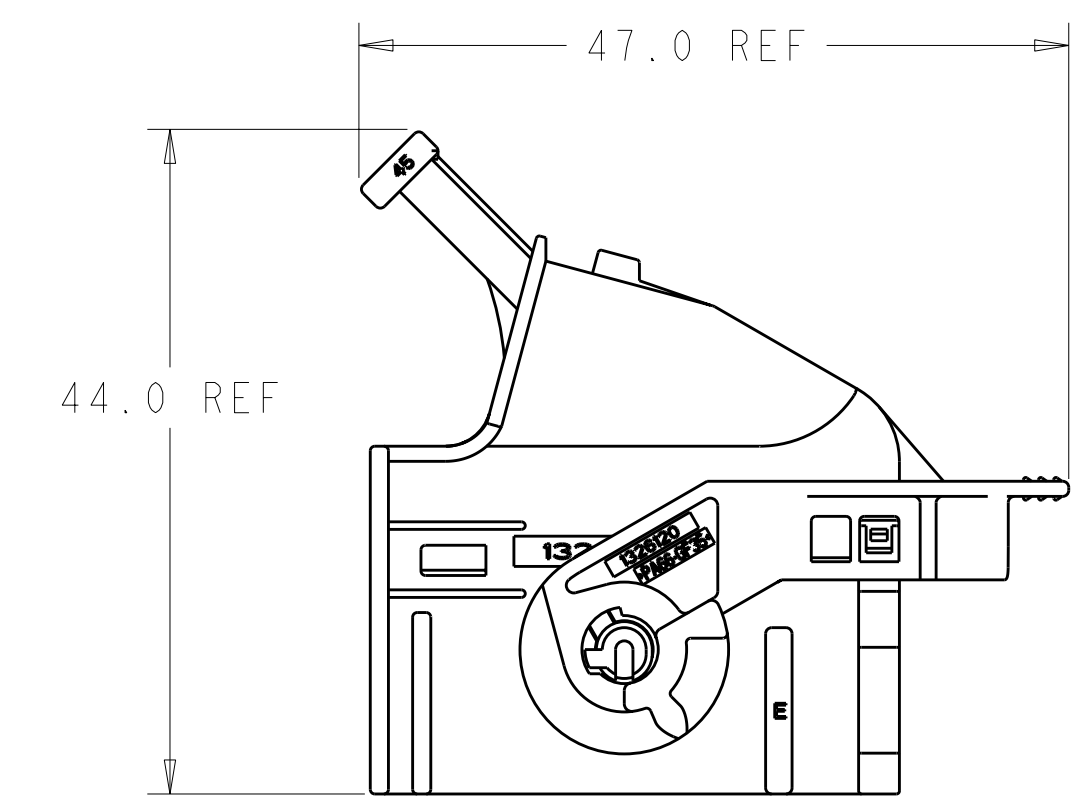


45° WIRE EXIT  
SCALE 2:1


DIM W	COLOR	KEYING OPT.	PART NUMBER
45°	BLUE	B-F	1326122-6
45°	GRAY	B-E	1326122-5
45°	BLACK	A-E	1326122-4
70°	BLUE	B-F	1326122-3
70°	GRAY	B-E	1326122-2
70°	BLACK	A-E	1326122-1

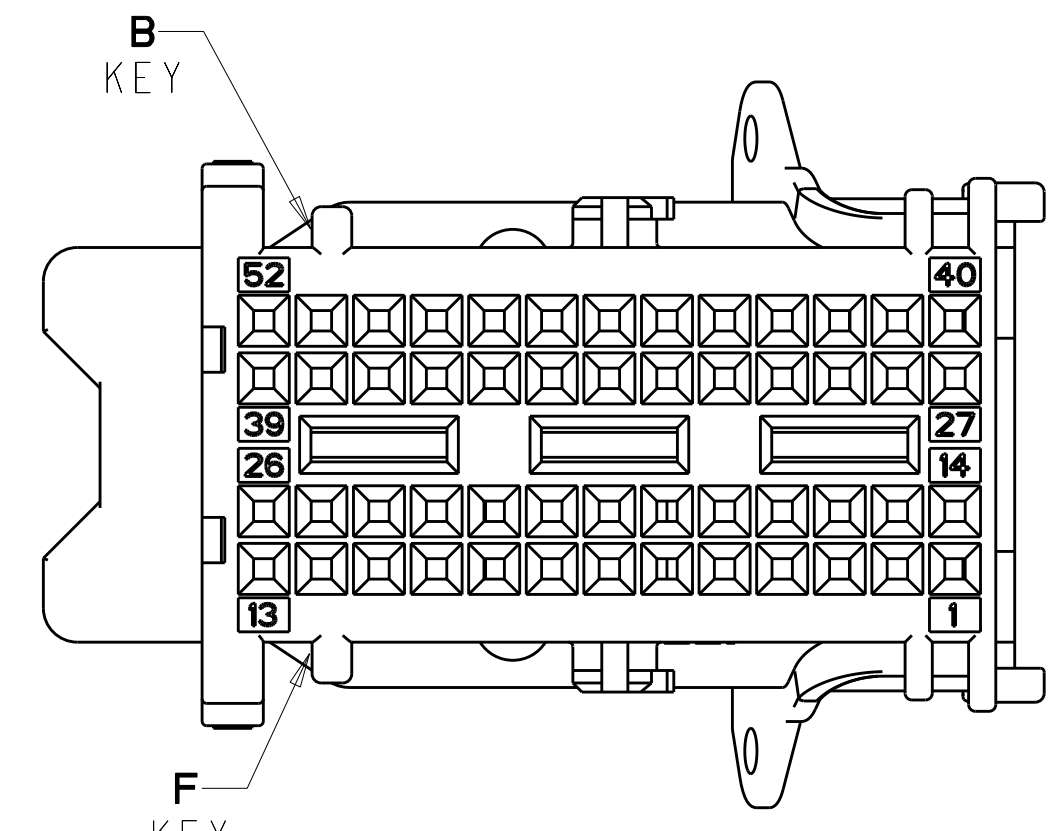

KEY B-F SHOWN FOR  
ASSEMBLY 1326122-3  
& 1326122-6


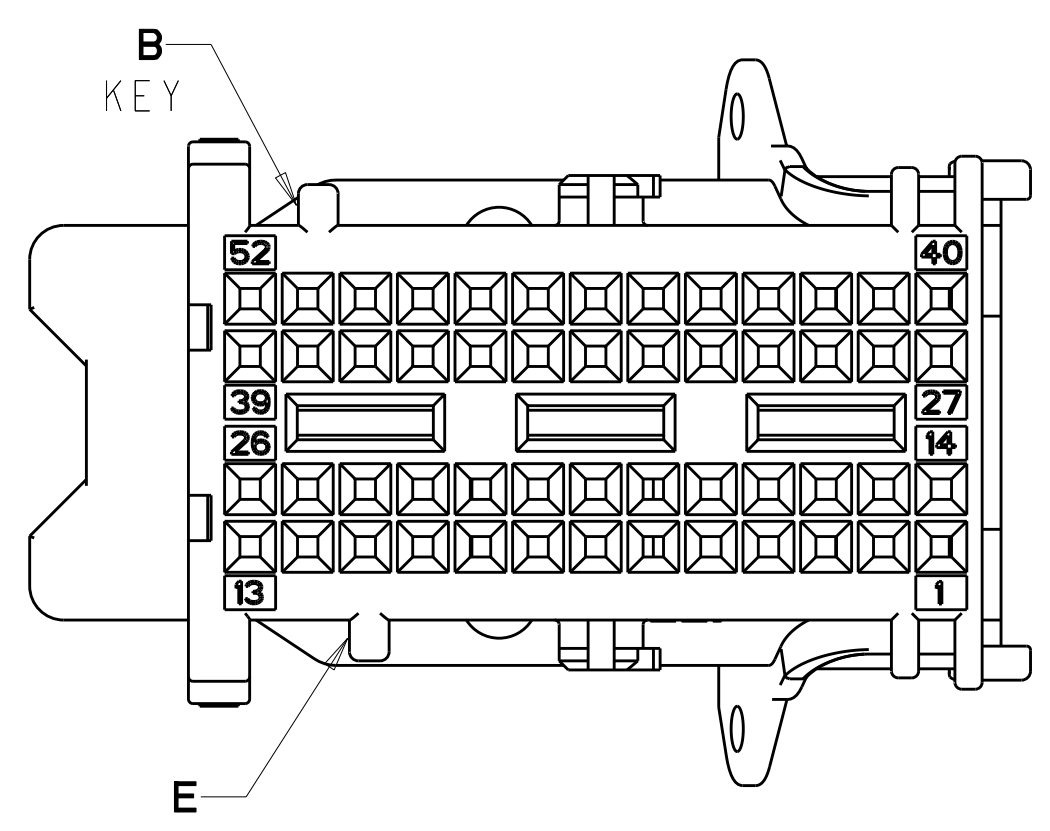


KEY B-E SHOWN FOR  
ASSEMBLY 1326122-2  
& 1326122-5

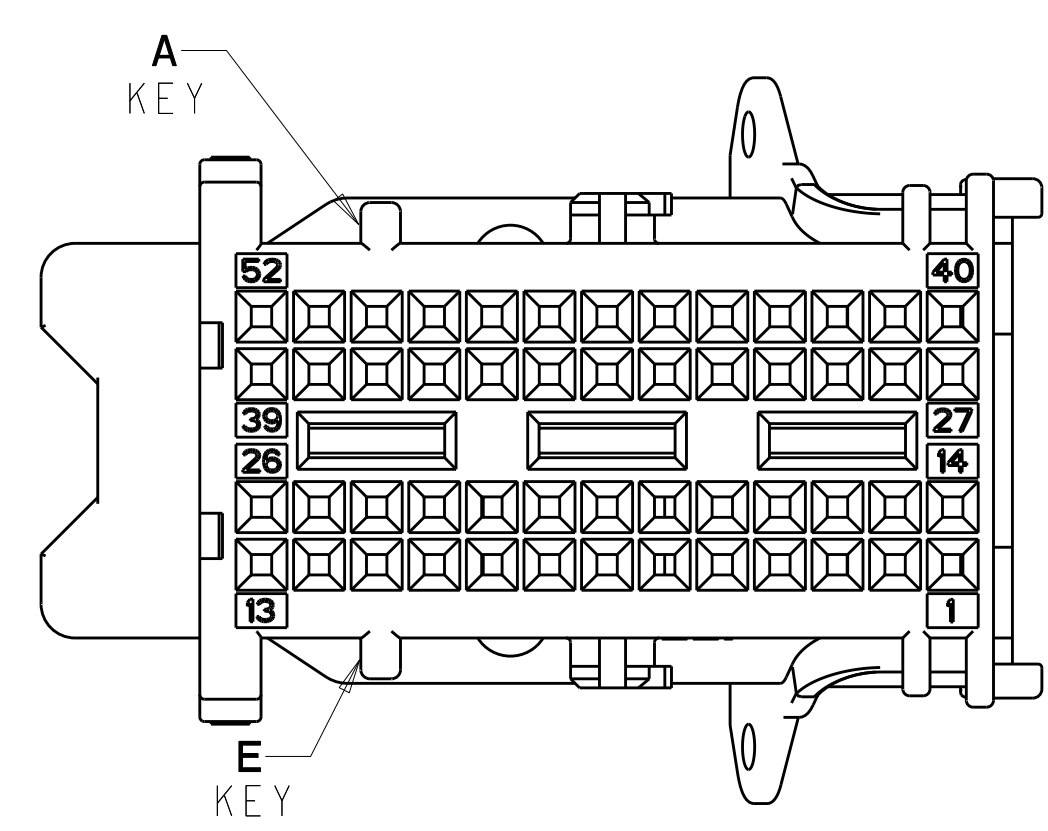

KEY A-E SHOWN FOR  
ASSEMBLY 1326122-1  
& 1326122-4


DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ± 1 PLC ±0.2 3 PLC ±0.05 4 PLC ± ANGLES ± FINISH:		DWN: T. WOOTEN 07JUL2000 CHK: C. MARTIN 07JUL2000 APPV: D. KLEIN 07JUL2000 NAME: SHIELD ASSEMBLY, 52 POSITION, LEVER ASSISTED CONNECTOR SIZE: A1 CAGE CODE: 00779 DRAWING NO: 1326122 RESTRICTED TO: REV B1	
MATERIAL:		FINISH: -		Tyco Electronics Harrisburg, PA 17105-3608 CUSTOMER DRAWING SCALE: 4:1 SHEET 1 OF 2	

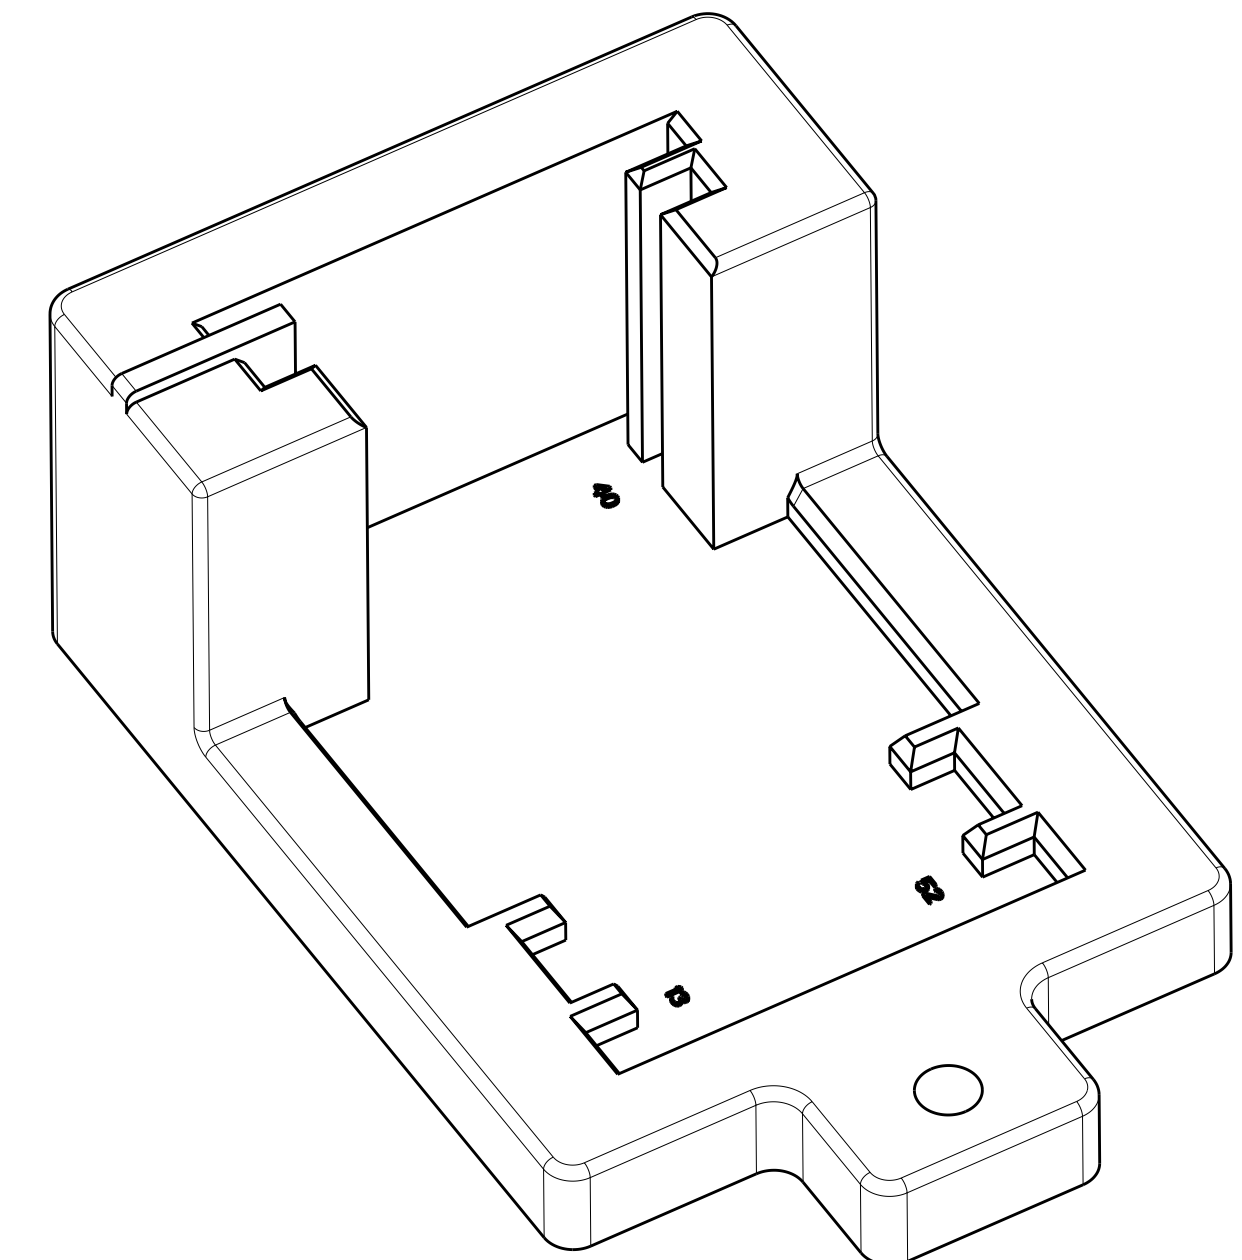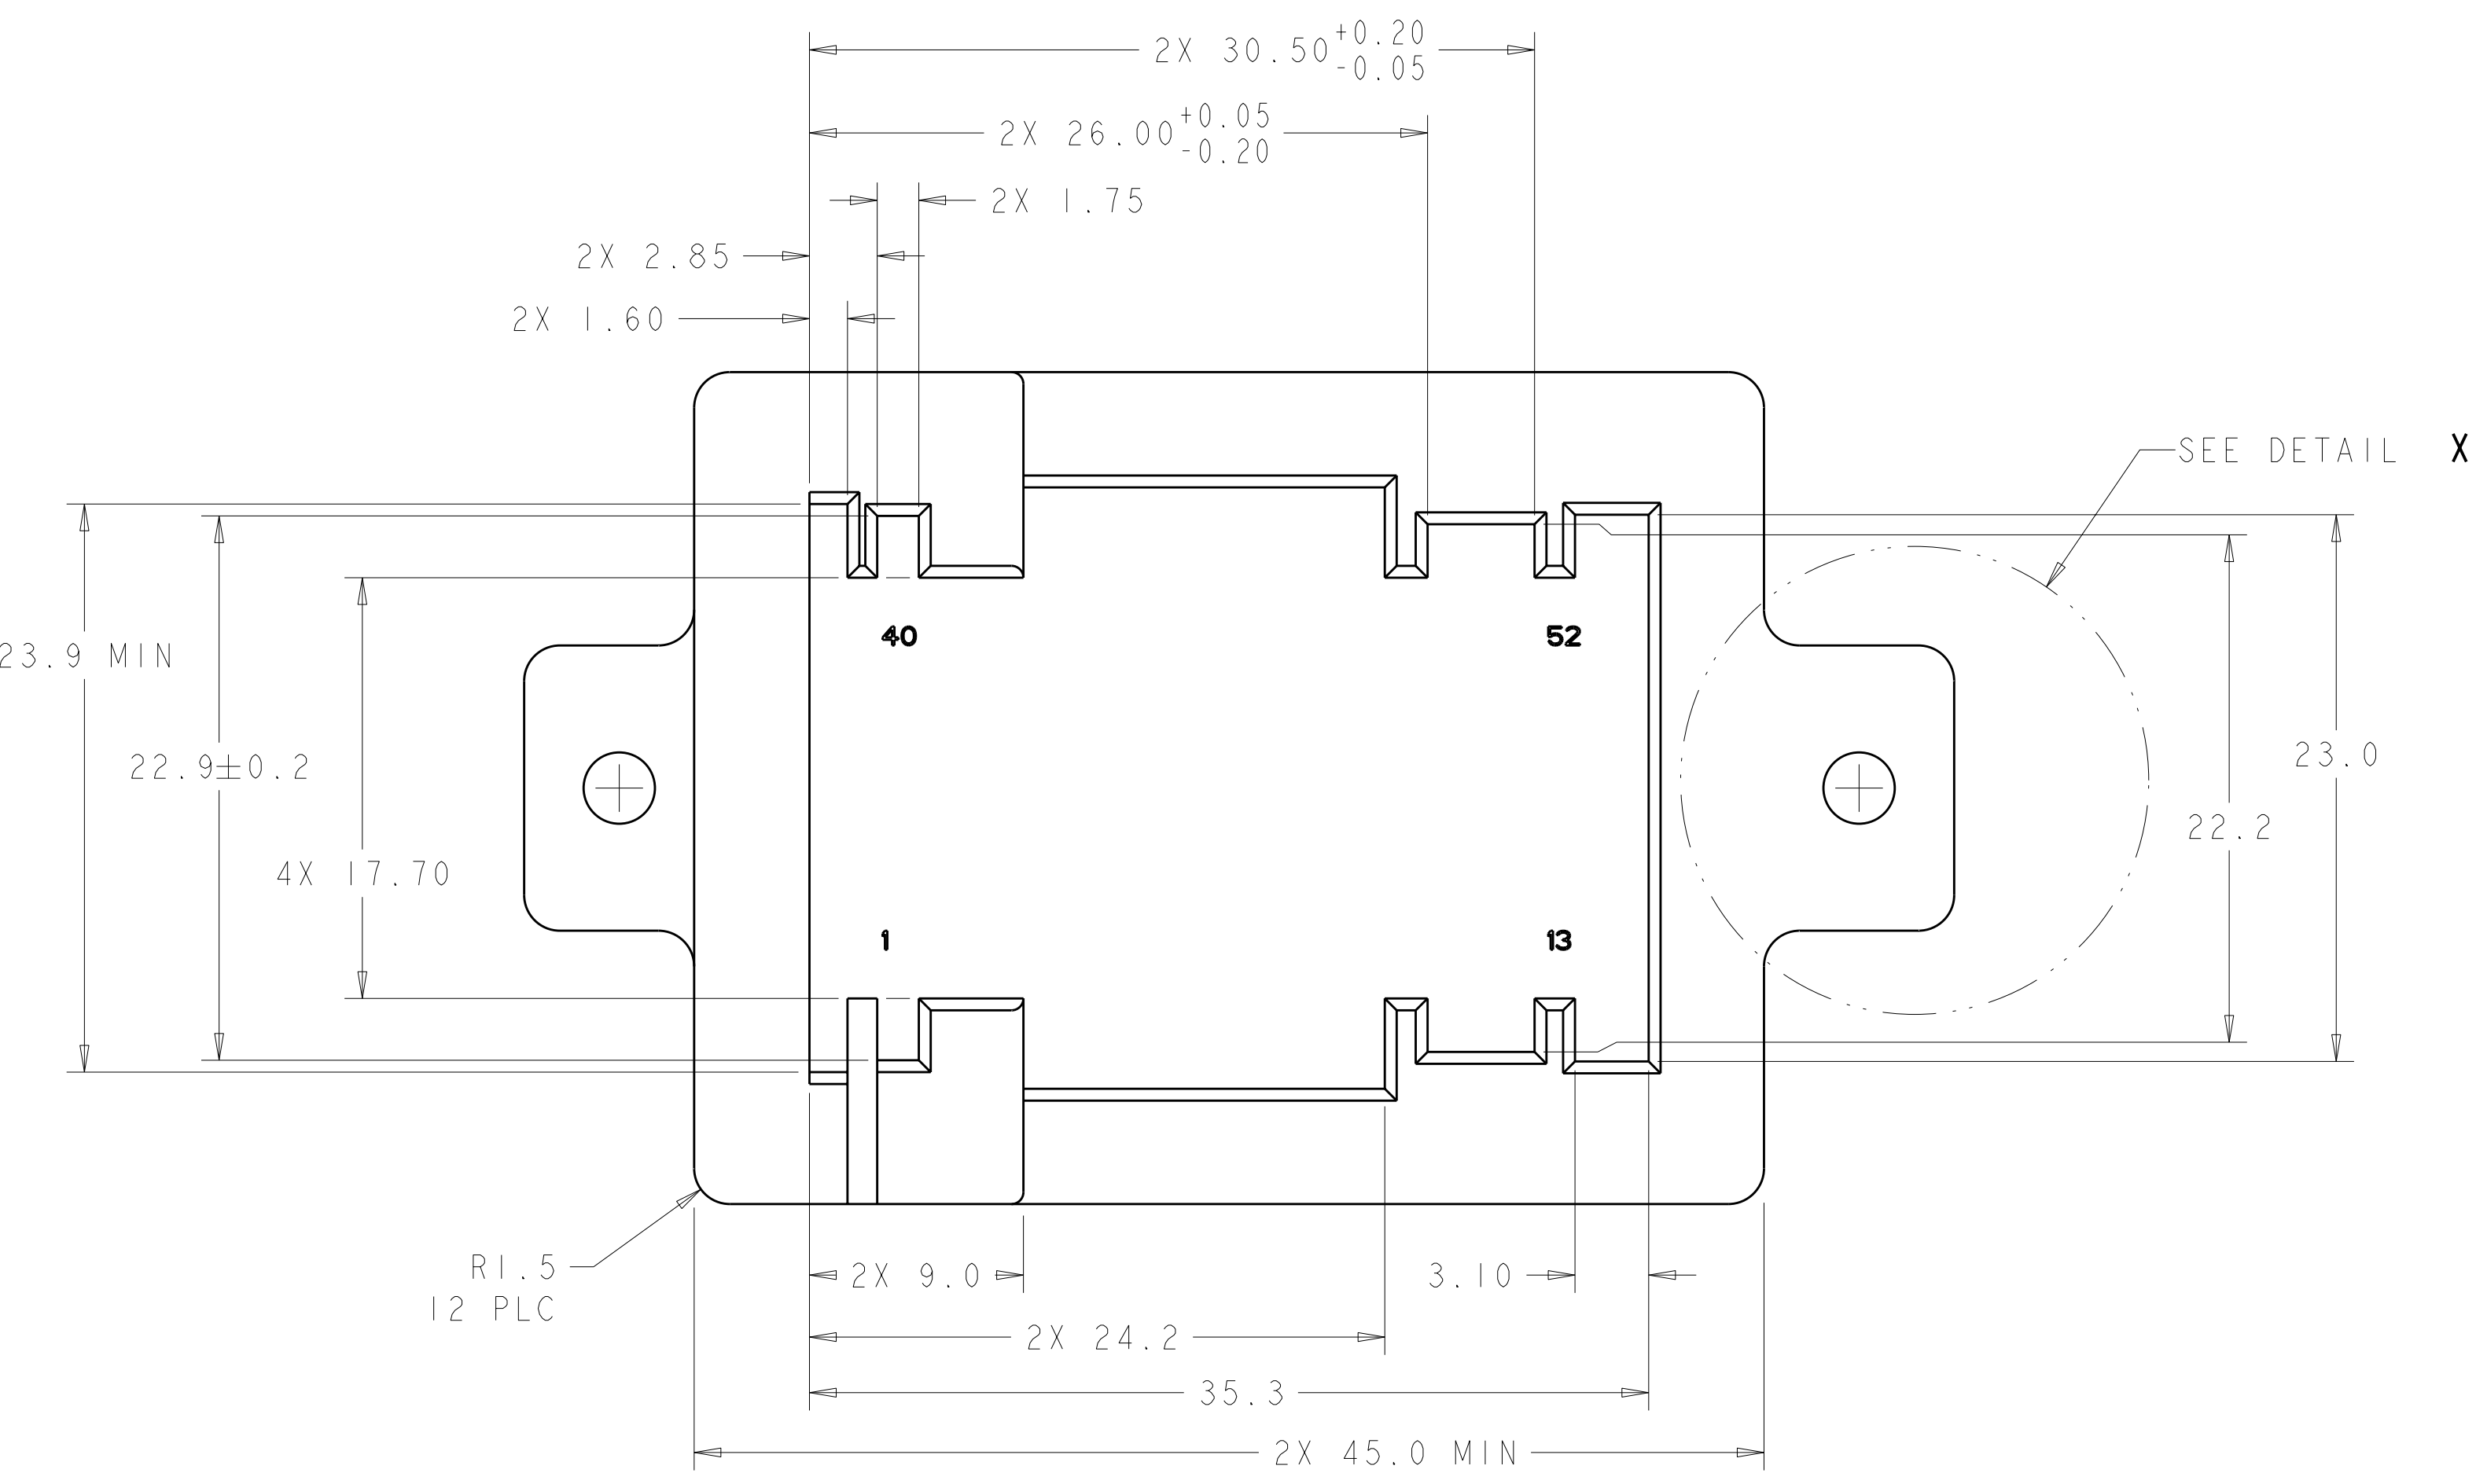


SCALE 3:1

LOC	DIST	REV	DATE	BY	APPD
FX	00				


REVISIONS					
REV	DATE	DESCRIPTION	BY	APPD	REASON
-	-	SEE SHEET 1	-	-	-

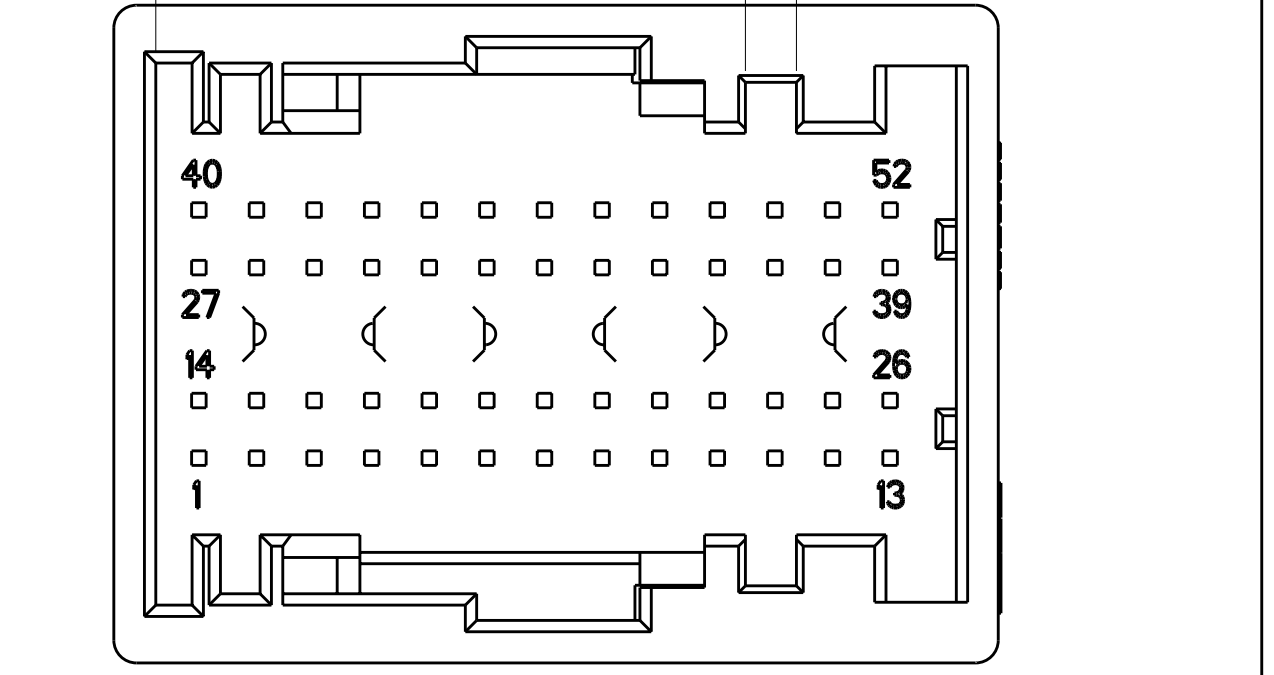

KEY OPTION A-E


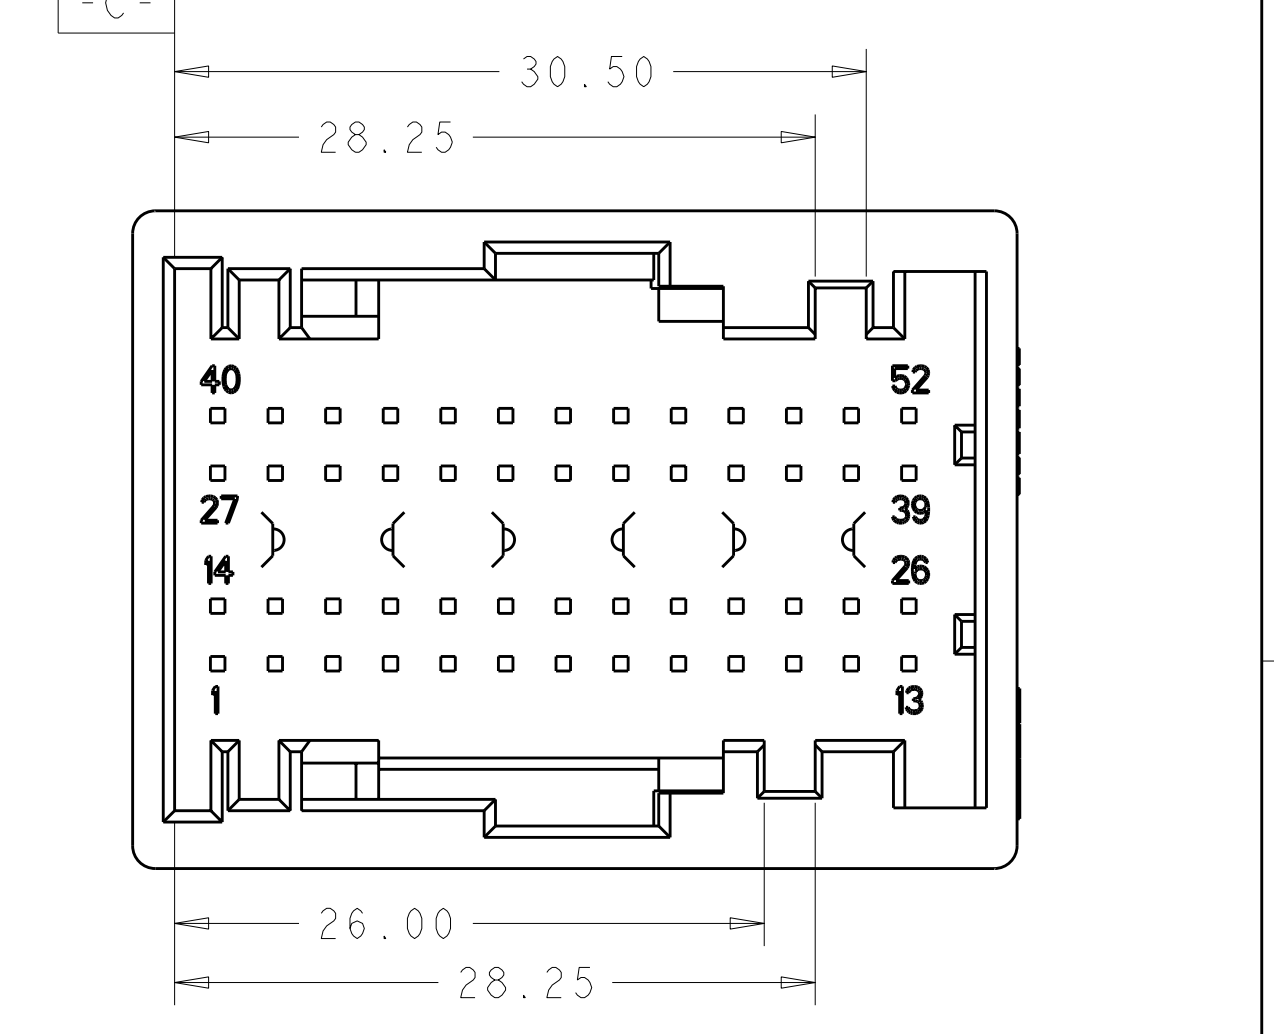


KEY OPTION B-E

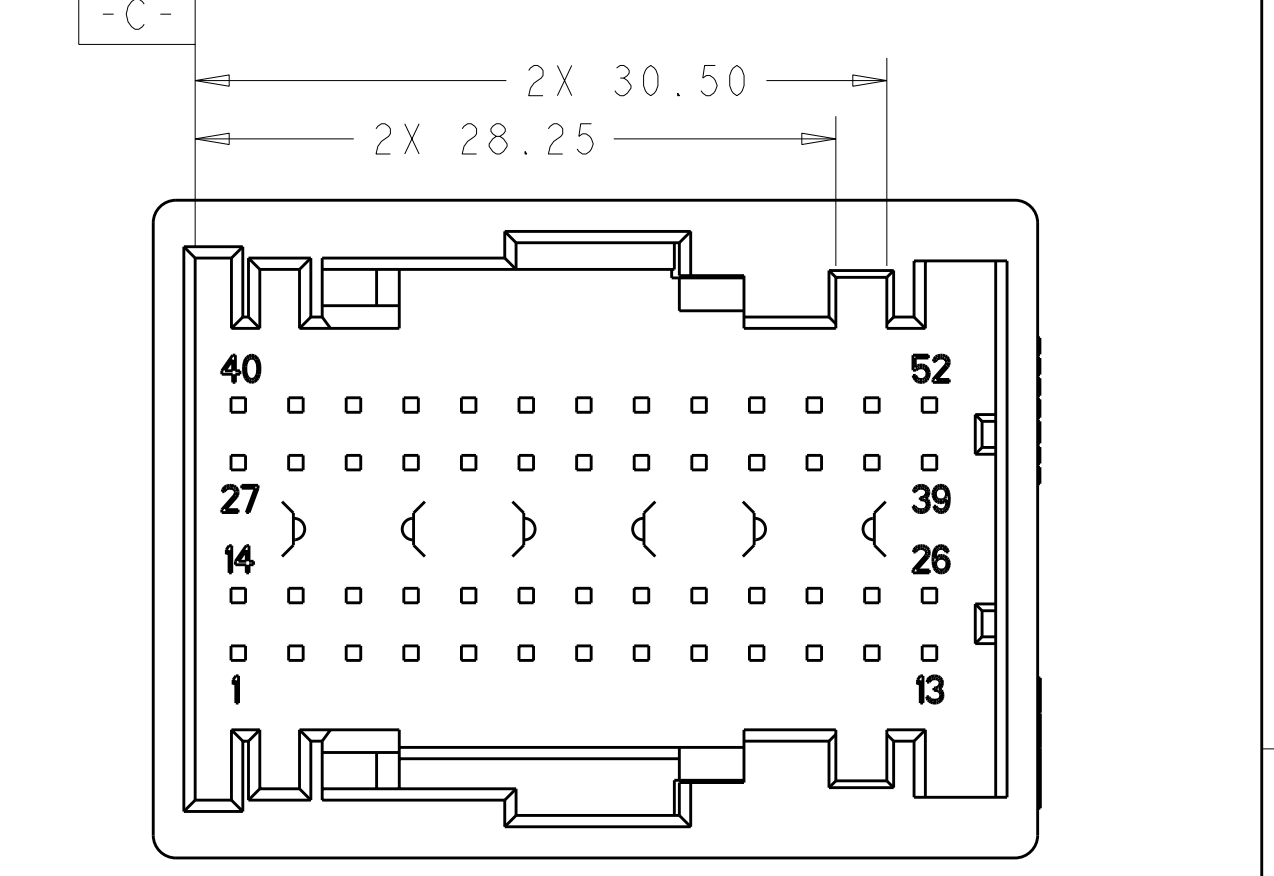


KEY OPTION B-F

KEYING OPTIONS

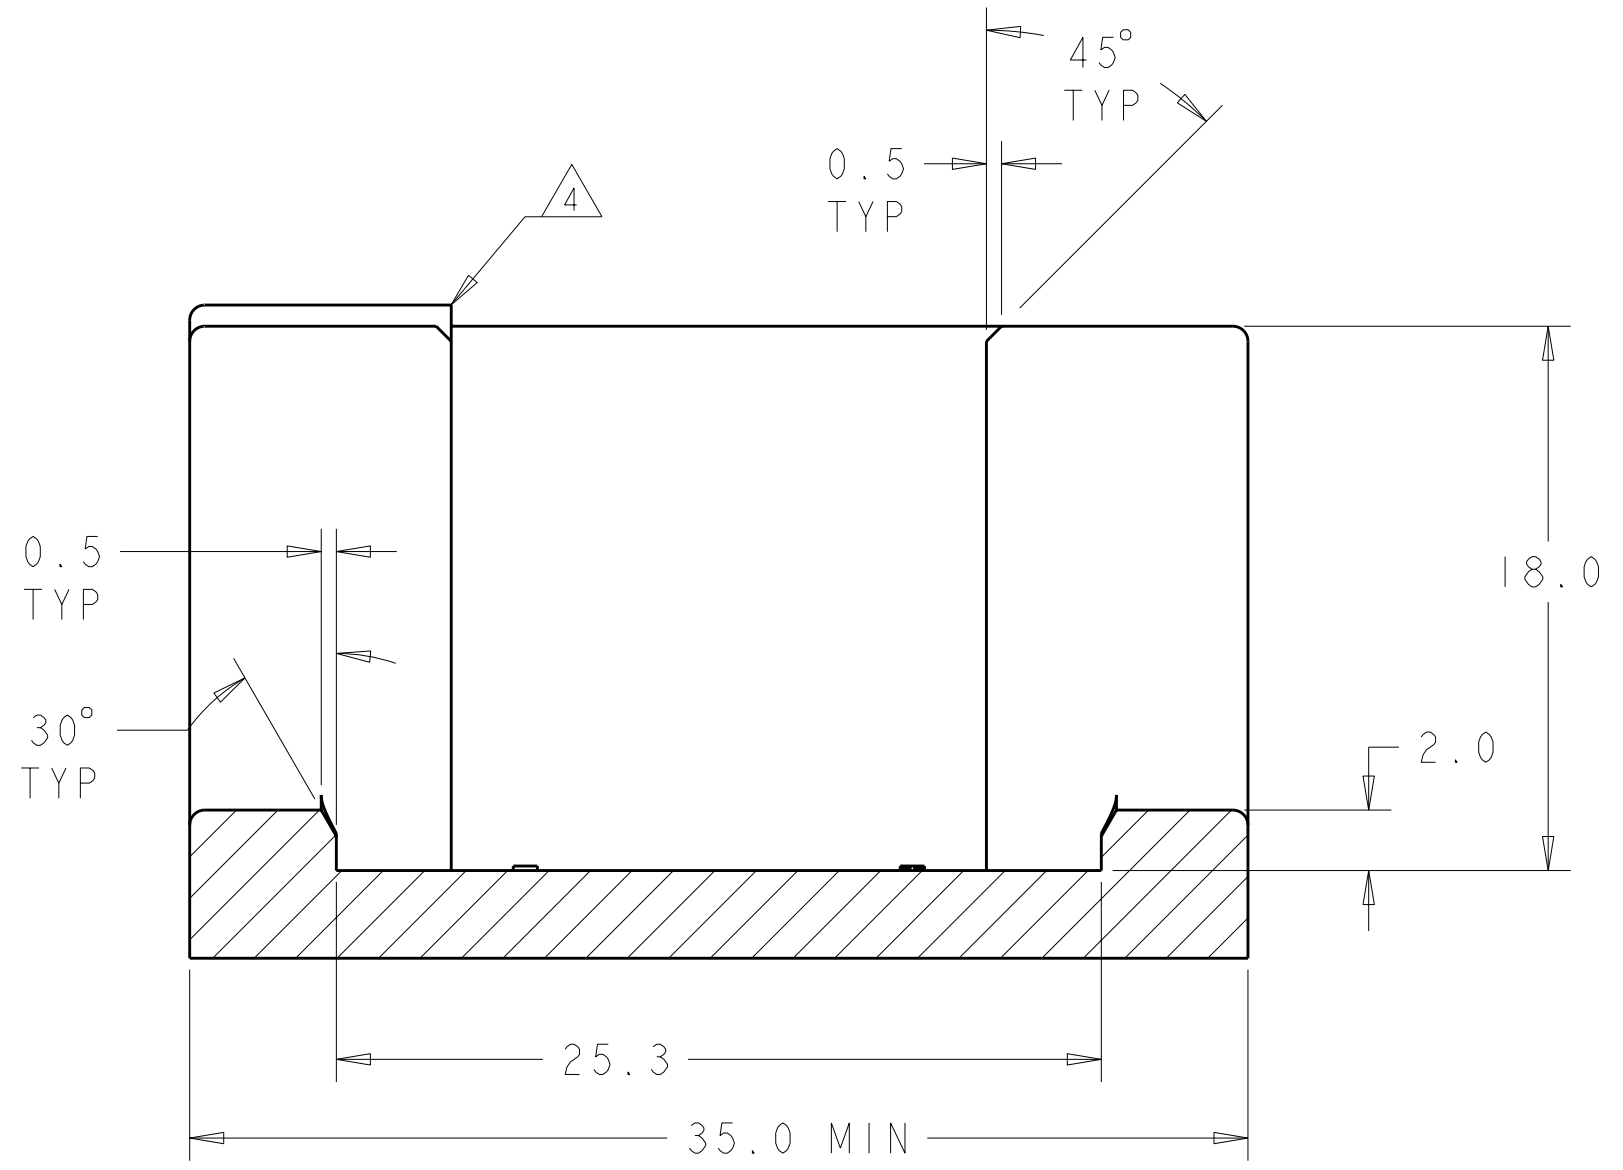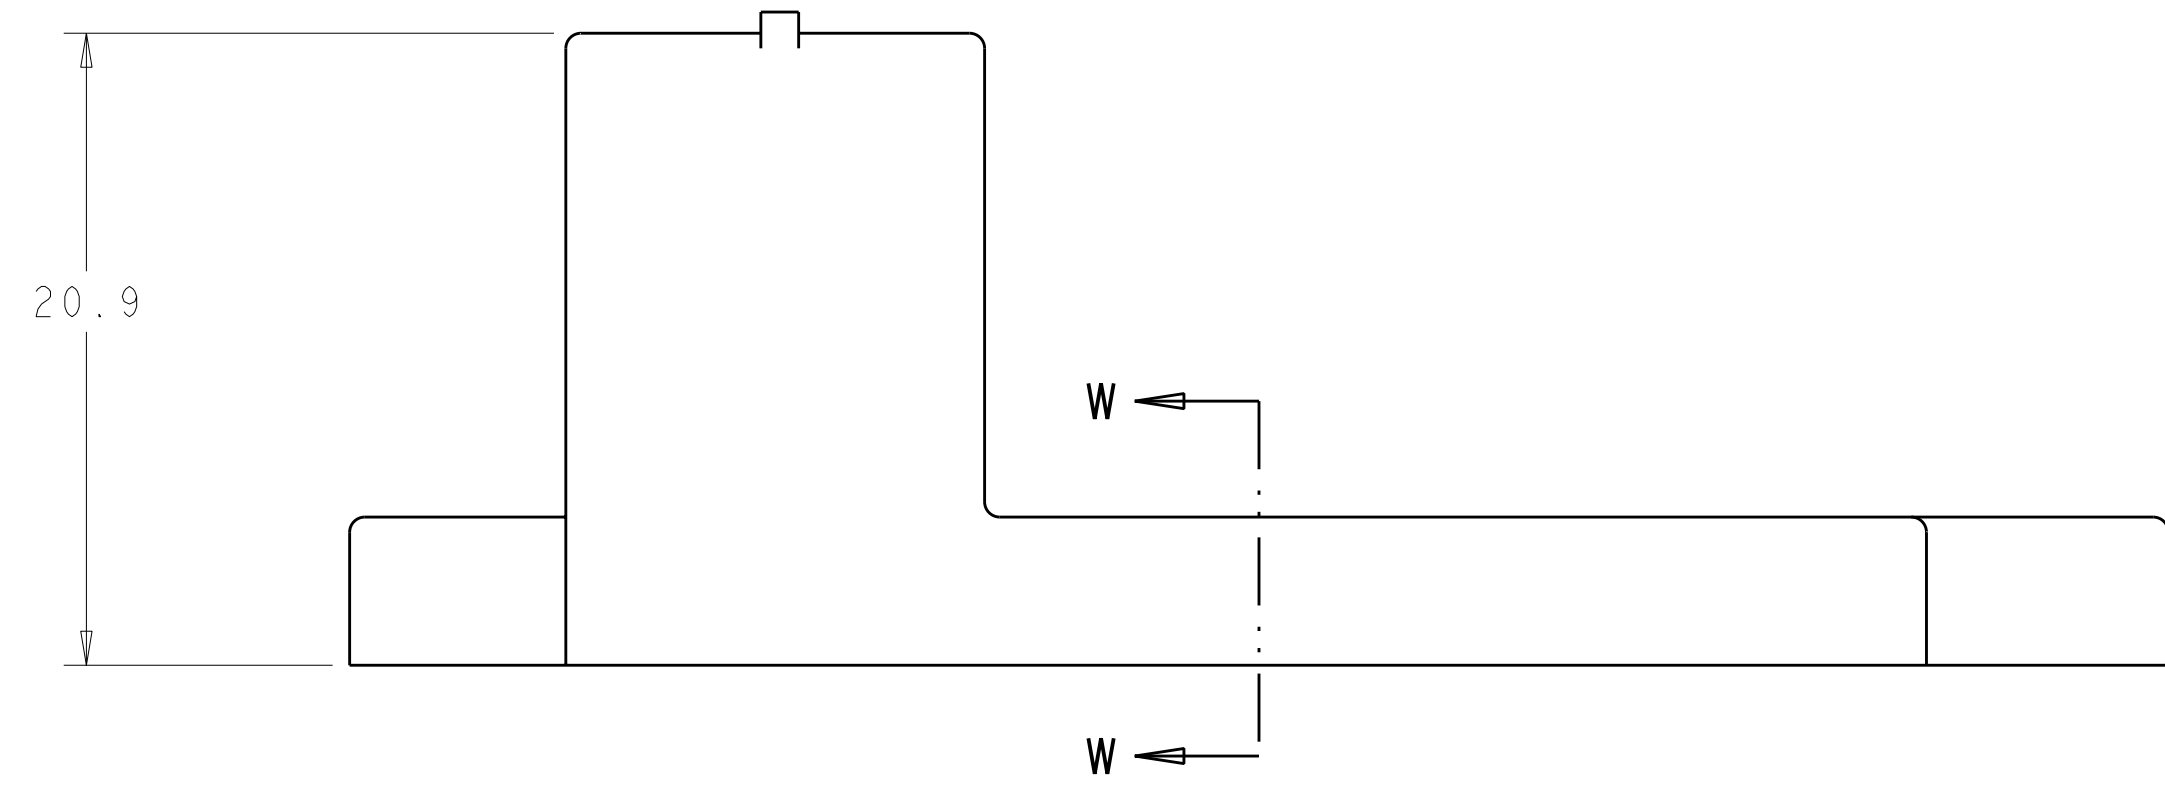

SECTION W-W

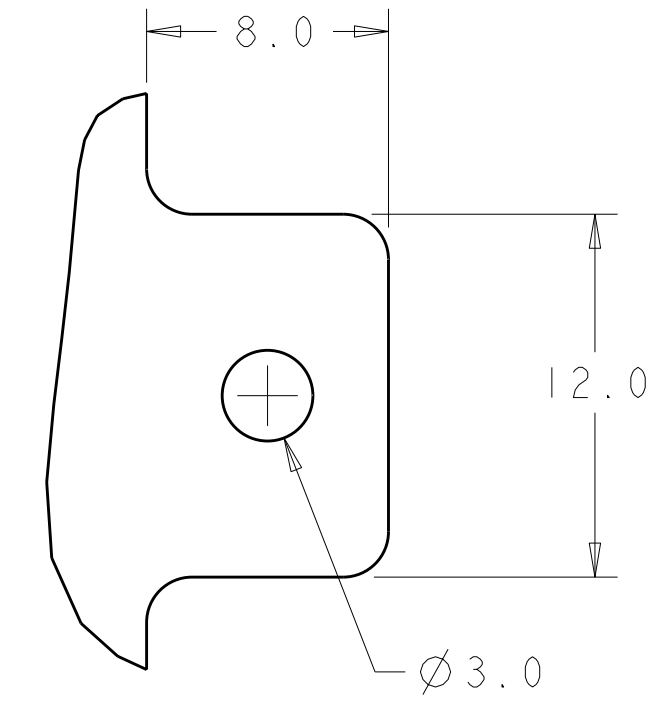

DETAIL X SCALE 4:1

52 POSITION CONNECTOR FIXTURE  
 (SHOWN WITH CLEARANCE FOR ALL KEY OPTIONS)

- CONNECTOR FIXTURE SHOULD BE USED TO VERIFY THE RECEPTACLE CARRIER IS PROPERLY SEATED AND LOCKED INTO THE SHIELD ASSEMBLY. THE CONNECTOR WILL NOT FULLY MATE TO THE FIXTURE IF THE RECEPTACLE CARRIER IS OUT OF POSITION.
- RECOMMEND USING A SENSING DEVICE FOR VERIFYING FULLY MATED CONNECTORS. SUCH A DEVICE IS AT THE CUSTOMERS DISCRETION.
- RECOMMENDED MATERIAL: HARDENED STEEL
- NO RADII OR CHAMFER PERMITTED IN SPECIFIED AREA. MUST MAINTAIN 90° EDGE.
- RADII TO BE 0.5 UNLESS OTHERWISE SPECIFIED.
- OPTIONAL CONSTRAINT FEATURE.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN T. WOOTEN 07JUL2000		Tyco Electronics Tyco Electronics Harrisburg, PA 17105-3608	
mm	9 PLC ±	1 PLC ±0.2	5 PLC ±0.05	4 PLC ±	ANGLES ±	FINISH ±1*	NAME SHIELD ASSEMBLY, 52 POSITION, LEVER ASSISTED CONNECTOR
MATERIAL	FINISH	WEIGHT	CAGE CODE	DRAWING NO	RESTRICTED TO	SCALE	SIZE
			A11 00779	C=1326122		4:1	2 OF 2
CUSTOMER DRAWING				REV B1		SHEET 2 OF 2	