
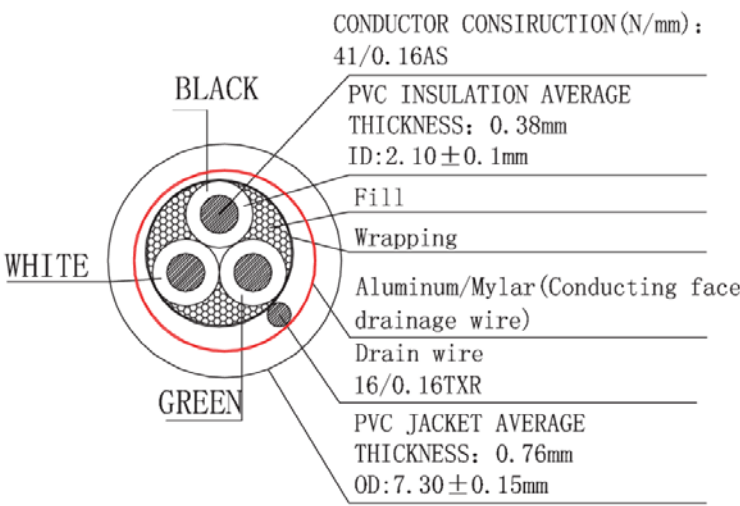
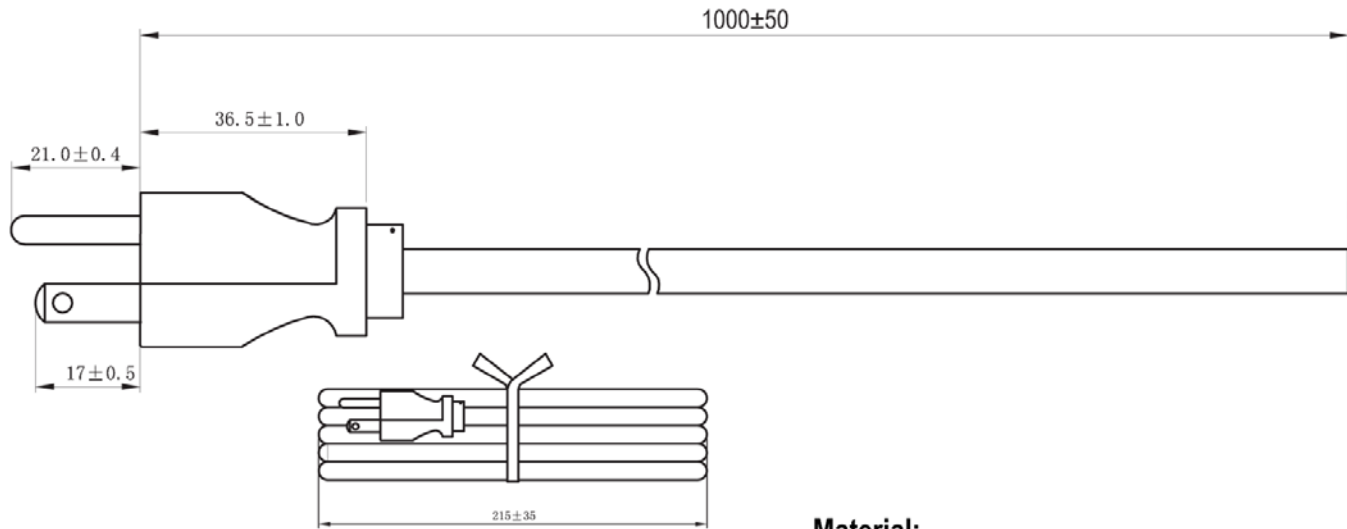


A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

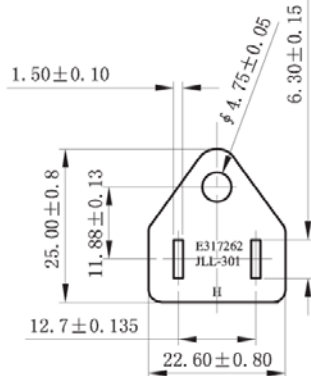

- Material:**
- E243711(UL) SVT 3 x 18AWG(0.824MM<sup>2</sup>) VW-1 Shielded, 60°C 300V
  - CSA 228191 SVT 3 x 18AWG(0.824MM<sup>2</sup>) FT2 Shielded 60°C 300V -LF-
  - Jacket Color: Black
  - E- Green; L - Black; N - White

- Electrical:**
- 100% Open & Short Testing
  - Insulation Resistance: 100MΩ (Min.)
  - Voltage: 500V DC / 1 Min.

Unit: MM

Scale	1:1					Name	Item No.
TOLERANCE					Drawn	12.27.11	<b>AK500-OE-5-0.5</b>
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
						Title Power Cord - SVT/Open End, Shielded, 60°C, 18AWG, 0.5 Meter	
						Drawing No.	
						rev00	
						Replace Sheet	

