
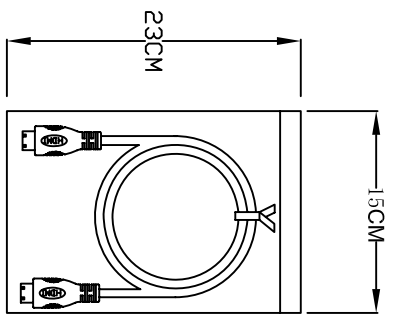


1. Wiring Diagram.

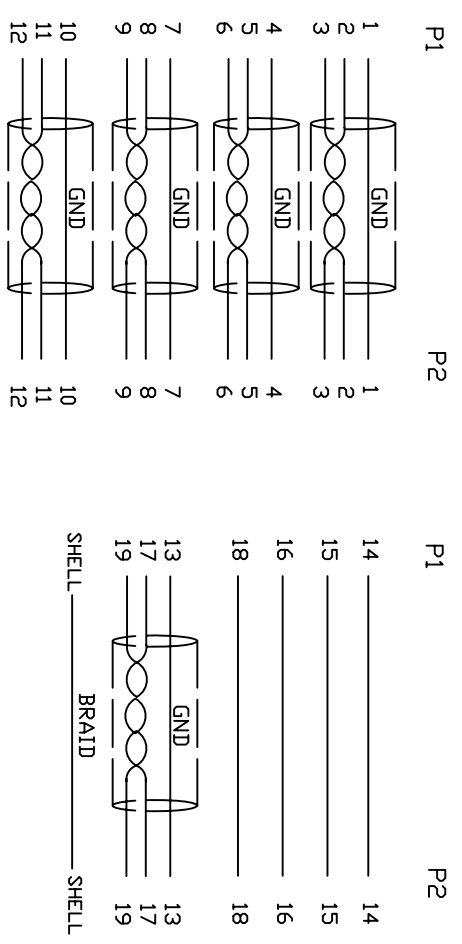

2. Cable test condition :

- Open / Short : 100%
- Insulation resistance : 5M ohms
- Contact resistance : 2 ohm
- Hipot : DC 300V / 1 sec

3. Each pcs with PE polybag.

5	COPER	W/20MM*L35MM	1			A	INITIAL RELEASE	2015/10/10
4	PVC	45P PVC BLACK OVERMOLD	25g			REVECHN#	DESCRIPTION	DATE
3	PE	LLDPE 500026 6201 INSIDE MOLDING	16g					
2	CONN	HDMI C TYPE MALE PIN G/F ,SHELL PLATED NICKEL, INSULATION BLACK	2		P1,P2			
1	CABLE	UL20276 《30AWG (7/0.1TS) *JP+EA+AL/MY》*5+30AWG (7/0.1TS) *4C +AEM(16/6/0.12AM) OD6.0 BLACK	1		3000mm			
NO.		PART NO.	DESCRIPTION		QTY	UNIT/REF		
BILL OF MATERIAL								
DRAWN: EDWIN LAI						DATE: 10/10/15		
CHECKED: W. IN. C						DATE: 10/10/15		
APPROVAL:						SHEET 1 OF 1		
Cnc Tech, LLC						TITLE: HDMI C/M TO HDMI C/M CABLE		
DWM NO.: 742-20010-00300						REV: A		
CUSTOMER P/N:						CUSTOMER:		