



Home >> Electronic Components >> RF Modules >> Bluetooth >> PAN1323

PAN1323 Series

Make your product Powered by Panasonic

What's New

Part Number Search

Capacitive Products

Resistive Products

Inductive Products

Electromechanical

Filters

High Frequency Components

RF Modules

Bluetooth

PAN1026

PAN1322

PAN1323

PAN1720

PAN1721

PAN1323ETU

PAN1311/1321

PAN1321I

PAN1325A/1315A

PAN1325

PAN1315

PAN1327/1317

PAN1326/1316

PAN1455

PAN1555

Mesh Networking

PAN4555

PAN4555ETU

PAN4561

PAN4561L

PAN4561M

PAN4561ETU

PAN4570

ISM

PAN2350

PAN2355

PAN2450

Audio Components

Power Supplies

Printed Wiring Boards & Devices

Circuit & Thermal Protection

Semiconductors

Relays

RESOURCES - Click to Expand/Close

Overview



New – High Temperature Module!

One highly flexible RF Module, three popular standards: Bluetooth Classic, Bluetooth Low Energy and ANT™. Panasonic introduces the **NEW PAN1323 Series Triple Mode RF Module** with embedded antenna. The **PAN1323 Series** provides easily integrated Bluetooth Version 4.0 and ANT connectivity into new and current designs by removing RF design and certification barriers from the development of the application. **Gain unprecedented access using this three mode gateway module that can connect 14 Million ANT nodes to over 3 Billion Bluetooth nodes.** Use Bluetooth EDR to manage large data requirements while taking advantage of extraordinary battery life using ultra-low power network technology found in Bluetooth Low Energy and ANT for small data loads.

Designers can reduce the size and cost of applications using Panasonic's unique, tiny footprint technology. Just 85.5 mm², this family of modules are designed to accommodate PCBs with pad pitch of 1.3mm with as little as two layers for easy implementation and manufacturing. **PAN1323 Series** Modules have a Bluetooth subsystem, FCC, CE, (ETSI) and IC certifications.

The **NEW PAN1323 Series** is based upon Texas Instrument's CC256x integrated circuits and uses a host controlled interface (HCI), a cost effective and flexible means to implement a Bluetooth network. HCI reduces BOM cost by eliminating redundant processing capacity and giving designers the flexibility to work with a controller of their choosing, as the stacks reside and execute on the application's host processor. The **PAN1323 Series** is pad compatible with Panasonic's PAN1325A, PAN1326 and PAN1327 Series. A single PCB layout allows the flexibility of different protocol functionality implemented with only firmware.

Applications

- Health and Wellness
 - Heart Rate Monitor
 - Blood Pressure Sensor
 - Blood Glucose Monitor
 - Thermometer
- Sports and Fitness
 - Fitness Equipment
 - Bicycle Computer
 - Cadence
 - Power Meter
 - Pedometer
- Home Automation
 - Flood Alarm
 - Lighting Control
 - HVAC Monitoring and Control
- Gateways
- Industrial Sensors
- Mobile Accessories
- Irrigation

Product Performance


- A Single Module for Three Standards: Bluetooth Classic, Bluetooth Low Energy and ANT™
 - Bluetooth Version 4.0
 - ANT™ is a wireless sensor network protocol designed for ultra-low power applications
 - Bluetooth Low Energy average power consumption is about 1 uA
- Cost Effective and Flexible HCI Interface
- Easily Integrates to Texas Instruments' MSP430 and Stellaris ARM7 Controllers
- Extraordinary Range with 10 dbm of Tx Power
- Small Footprint: 9mm x 9.5mm x 1.8mm
- Fully Certified, Bluetooth v4.0, FCC, CE and IC
- Complete Development Environment
- 100% Footprint Compatible with Panasonic's PAN13xx Series
- Temperature Rating -40°C to +85 °C
- Supports All Bluetooth Profiles
- Compatible with 14 Million Deployed ANT Nodes

PAN1323 Part Numbers:		
Part Number	Description	
ENW-89842A2KF	Bluetooth, PAN1323 , Triple Mode with Antenna	
EVAL_PAN1323	Bluetooth, PAN1323, Eval Kit, Includes MSP430 Experimenter Board	
EVAL_PAN1323ETU	Bluetooth, PAN1323, Development Module	
Technical Specifications for PAN1323:		
Parameter	Value	Condition / Notes
Receiver Sensitivity (BER=10 ⁻³)	-93 dBm	GFSK, Typical, Dirty TX On
Output Power	10 dBm	VDD_In = VBAT

Industrial Automation

Power Supply	1.7 - 4.8 V	Battery of DC/DC
Ultra Low Power Scan	135 uA	1.28s Interval
GFSK DH1\DH5	33 mA	Full Throughput
Operating Temperature Range	-40°C to + 85°C	

Block Diagram PAN1323:

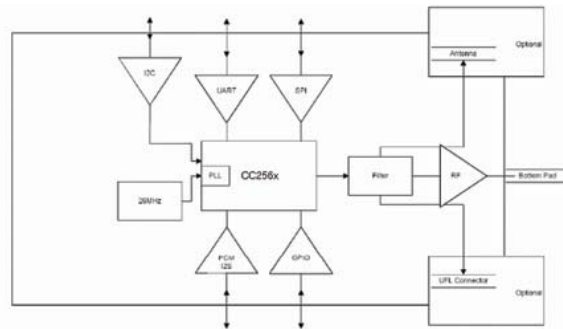

Evaluation Kits:

EVAL_PAN1323



EVAL_PAN1323_ETU



[About Us](#) | [Contact Panasonic](#) | [Pressroom](#) | [Global Sites](#)

[Panasonic Direct Store Policies](#) | [Pricing & Specification Policy](#) | [Privacy Policy](#)

Copyright 2013 Panasonic Corporation of North America. All Rights Reserved