


NOTES:

1. MATERIALS AND FINISHES
 BODY - BRASS, NICKEL PLATING
 CONTACT - BERYLLIUM COPPER, GOLD PLATING
 INSULATOR - DELRIN, NATURAL
2. ELECTRICAL:
 A. IMPEDANCE: 75 OHM
 C. FREQUENCY RANGE: DC 0-4 GHz
 C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: - 40°C to +85°C

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
B	ADDED AN USER \TONY. T	22-Jul-98		
B1	ADDED AN USER (AEAL)\N/A	11-Jun-99		
B2	STAMP WERE CHANGED\N/A	30-May-03		
C	SEE SHEET 1	20-Sep-04		
D	SEE SHEET 1	27-Jun-08		SH
E	SEE SHEET 1	21-Dec-09	47888	LSM

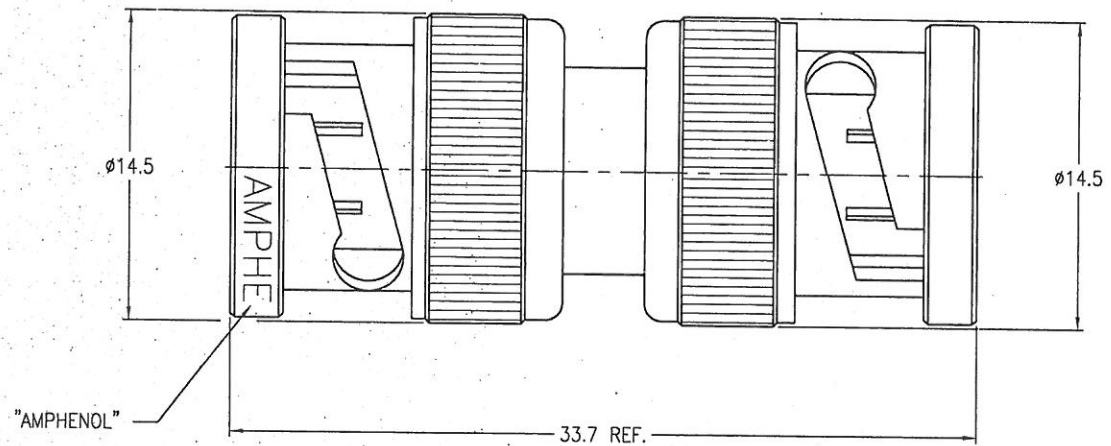

CUSTOMER OUTLINE DRAWING
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ±0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°	MATERIAL	DRAWN T.DENG ENGINEER C.WANG APPROVED S.HSIEH CAD FILE F:\DWG\APL\CNPD\RF\31\218\75\ND3G-ESZ	DATE 21-Dec-09 DATE 21-Dec-09 DATE 21-Dec-09	TITLE BNC MALE TO BNC MALE ADAPTOR			Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com	
	REFERENCE				SCALE: 3/1	SHEET 2 OF 2		DRAWING NO. 31-218-75-ND3G
	FINISH				DWG SIZE B	CODE ID 74868	REV E	ITEM NO. 012071AAB0ND7F
	NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.							
PART NO. 31-218-75RFX								

RD-OR 31943 page 2