



LED Module

REV.NO.

PAGE

02

1/10

SPECIFICATION



LED Modular Platform Module Series

Model Name	Platform LED Module with 4 Screw Holes
Type	CRI min. 75, 5000K, Flux Rank 4, Type II-M(2), 3535 Ceramic
Parts No.	SL-PGR2T47M3WW

SAMSUNG ELECTRONICS CO., LTD.



LED Module

REV.NO.

PAGE

02

3/10

CONTENTS OF SPECIFICATION

1. APPLICATION	4
2. FUNDAMENTAL SPECIFICATIONS OF MODULE	6
3. PARTS SPECIFICATIONS	7
4. APPEARANCE AND STRUCTURE	8
5. PACKING SPECIFICATION	9
[APPENDIX 1] White LED Module Product Codes	10

This is a product specification of [SL-PGR2T47M3WW](#), one of SL-Puv2xwaabcc.
 Please refer to relevant [General and Special Application Notes](#) for thermal, optical, electrical, mechanical design and reliability information.



LED Module

REV.NO.	PAGE
02	4/10

1. APPLICATION

25W Platform LED Module is designed as a core component in **Modular Platform Engine Series** for street light and flood light application. This document especially specifies **25W Platform LED Module with Fin**, generally recommended for luminaires with insufficient thermal management by the fixture itself.

1-1 Modular Platform Module

There are three different types of heat sink designs for 25W Platform LED Module, intended for thermal management either by engine or by fixture.

This document especially specifies **25W Platform LED Module with Fin for thermal management by Engine**.



(a) Module with Fin
[Thermal management by Engine]



(b) Module without Fin
[Thermal management by Fixture]


1-2 Modular Platform Engine Suggestion.

Typical operating current for one module is set at 700mA, which allows lumen output increment by **2300lm(nominal value)** depending on the number of LED modules.

1-2-1 Lumen Packages with LED Driver (Module : over 100lm/W)

Power Consumption (Engine, Nominal)	Modules (ea)	Operating Current (mA)	Lumen Output (lm)
25W	1	700	2300
50W	2	700	4600
75W	3	700	6900
100W	4	700	9200

[Example]

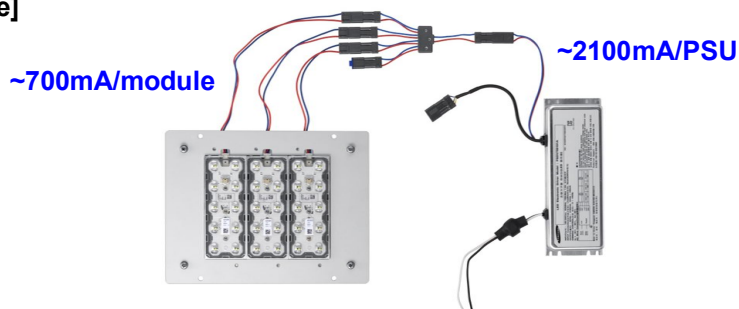



LED Module

REV.NO.

PAGE

02

5/10

1-2-2 Optic Solutions

Application	Light Distribution	Solutions	Material
Street Light	IESNA Type I	Short(1), Medium(1)	PC
	IESNA Type II	Short(1), Short(2), Medium(1), Medium(2)	PC
	IESNA Type III	Short(1), Short(2), Medium(1), Medium(2)	PC
	IESNA Type IV	Short(1), Short(2), Medium(1)	PC
	IESNA Type V	Short(1), Medium(1)	PC
Flood Light	Narrow	Circular(BA15/25/40)	PC
	Medium	Circular(BA50/65), Rectangular(BA50x80), Batwing(BA85)	PC
	Wide	Circular(BA100), Batwing(BA120) Rectangular(BA90x130)	PC

※ BA : Beam Angle, PC : Polycarbonate



LED Module

REV.NO.

PAGE

02

6/10

2. FUNDAMENTAL SPECIFICATIONS OF MODULE

No.	ARTICLE	SPECIFICATIONS					
2-1	Photometric Specification of Platform LED Module @700mA(stabilized at Tc~65°C)						
	CCT	Article					
		Symbol					
		MIN					
	TYP	MAX	Unit	Equipments			
5000K	Luminous Flux	LF	2000	2300	-	lm	Goniometer
	Color Temperature	CCT	4745	5028	5311	K	Integrating Sphere
	Color Rendering Index	CRI	75	-	-	Ra	Integrating Sphere
		※ Typical values are not necessarily the same as the nominal values.					
		Light Distribution Profile : Type II M(2) with Optimized Illuminance Uniformity					
		※ The isolux diagram is drawn at the luminaire height of 5m. ※ IES files(in IESNA or CIE format) are available with Optical Application Notes .					
2-2	Dimension	• LED Module with Fin : 150(L)×65(W)×45.02(H) mm					
2-3	Weight	• LED Lighting Module : {0.47kg ± 0.03kg} * 12ea • Total Weight (including packing box) : 5.7kg ± 0.5kg/1box					
2-4	Operating Temperature	• Case Temperature : +10°C ~ +80°C (Tc ~ 65°C at Ta ~ 25°C) T _c Point ※ Recommended Tc points as a function of number of modules are described in Thermal Application Notes .					
2-5	Storage Temperature	• -30°C ~ +70°C (Tc) ※ -30°C : ambient temperature without operation					
2-6	Dust-proof Water-proof	• IP66 for CE Marking • Damp Location for UL Marking					



LED Module

REV.NO.

PAGE

02

7/10

No.	ARTICLE	SPECIFICATIONS					
2-7	Electrical Specification of Platform LED Module (stabilized at Tc~65℃)						
	Article	Symbol	MIN	TYP	MAX	Unit	Remarks
	Power Consumption	P	-	21	-	W	30V x 0.7A, module only
	Operating Current	Iop	-	700	1000	mA	per 1 Module [700mA /PKG 1EA, TYP.]
	Operating Voltage	Vdc	28.0	30	33.0	V	per 1 Module [3.0V/PKG 1EA, TYP.] 10 LEDs in Series
Electrical Circuit	Maximum of 4 modules can be in parallel connection with one LED driver channel of a UL class 2 power supply unit.						
<p>※ The power consumption for a specific module is dependent on the operating voltage distribution across the modules in parallel connection. The maximum operating current means the highest limit in any operating condition.</p> <p>※ Voltage difference between modules are tightly controlled to be less than 1.0V so that the maximum current of any module can be limited to 850mA. Voltage bins of modules will be designated on the module label and box label, described in Electrical Application Notes.</p> <p>※ Safety and wiring information will be described in Electrical Application Notes.</p>							

3. PARTS SPECIFICATIONS

No.	ARTICLE	SPECIFICATIONS
3-1	Lens Cover Screw	<ul style="list-style-type: none"> Material : Stainless Steel with Teflon Washer Location : between the array lens and heat sink
3-2	Array Lens Cover	<ul style="list-style-type: none"> Material : Polycarbonate Thickness : 2.0 mm Lens Type : Type II Medium (2)
3-3	Seal Rubber	<ul style="list-style-type: none"> Material : Molded Silicone
3-4	LED Board	<ul style="list-style-type: none"> LED : Ceramic PKG, CCT 5000K, CRI min. 75 Material : MCPCB, Aluminum Thickness : 1.6 mm Stainless Steel Screws : 3ea
3-5	Side Inlet Harness	<ul style="list-style-type: none"> Material : Molded PVC coated with Sealant Silicone, 105℃ rating Wires : T. B. D Length(wires) : T. B. D Connector Plug : IP66(minimum)
3-6	Heat Sink (with Fin & 4 Screw Holes)	<ul style="list-style-type: none"> Material : Die-cast Aluminium Thermal Pad between the PCB and Heat Sink



LED Module




REV.NO.

PAGE

02

8/10

4. APPEARANCE AND STRUCTURE

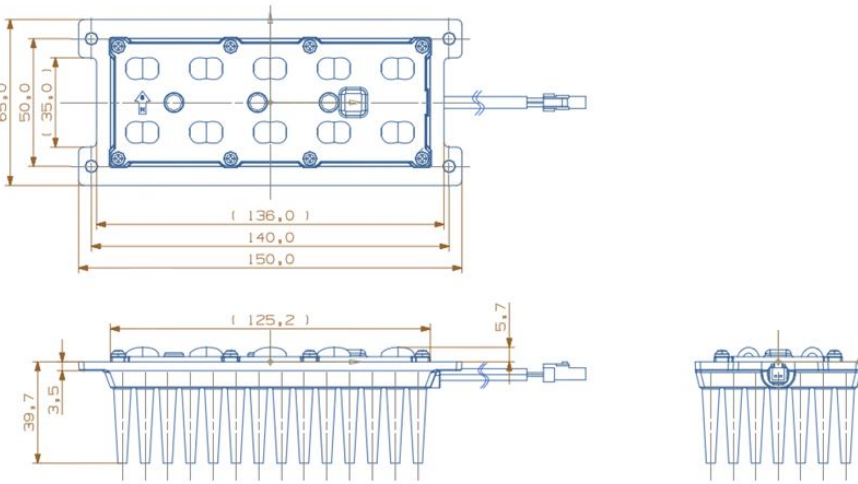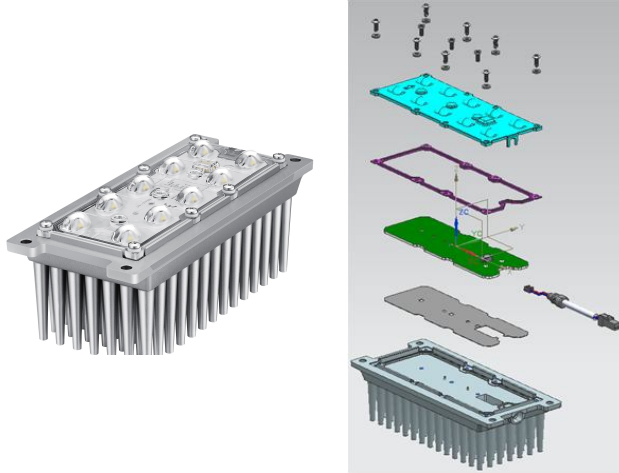No.	ARTICLE	SPECIFICATIONS
4-1	Appearance and Dimension (Type 7M)	 <p>※ Appearance is different for various optical solutions depending on the combination of the 10 core lenses. Critical dimensions are all the same for the optical solutions except for the thickness difference at the core lens cross-section. Detailed information on the lenses are described in Optical and Mechanical Application Notes.</p>
4-2	Structure (Type 7M)	
4-3	Labelling for Vf Binning (General)	 <p>[LED Board Label] [Module Label] [Box Label]</p>



LED Module

REV.NO.

PAGE

02

9/10

5. PACKING SPECIFICATION

5-1 Packing Method

5-1-1 Inner Box : 6 modules of the same Vf bin in one inner box

6 PCs/Inner Box




5-1-2 Outer Box : 12 modules on 2 stacks of inner boxes in one outer box

2 Stacks of Inner Boxes
(419 x 240 x 189)



5-2 Pallet : 32 boxes(384 modules) on one pallet

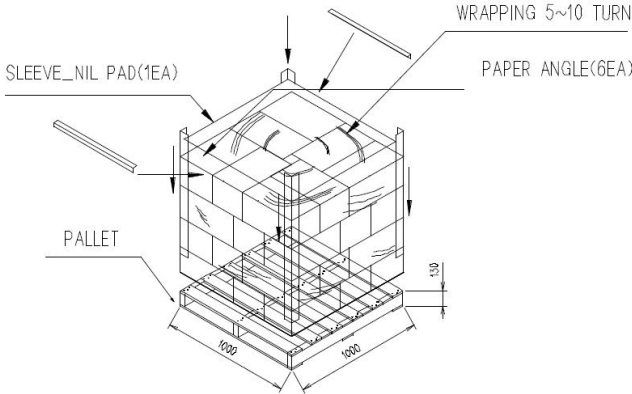

※ Two stacks of pallets are allowed.



LED Module

REV.NO.	PAGE
02	10/10

[20130812]

[APPENDIX 1] White LED Module Product Codes

Code	Module Type
P	Platform
I	Integrated
Z	Zhaga

Code	LED Platform
G	XP-G
3	3535 Ceramic

Code	Region
CN	China
EU	Europe
JP	Japan
KR	Korea
US	USA
WW	World Wide

SL-Puv2Twaabcc

25W

CRI(Ra)	Code
60.0~69.9	6
70.0~79.9	7
80.0~89.9	8
90.0~99.9	9
100	A
60.0~64.9	B
65.0~69.9	C
65.0~74.9	D
70.0~74.9	E
75.0~79.9	F
75.0~84.9	G
80.0~84.9	H
85.0~89.9	I
85.0~94.9	J
90.0~94.9	K
95.0~99.9	L

Code	Heat Sink Platform
E	Engine (Heat Sink with Fin)
F	Fixture (Heat Sink without Fin)
A	Adaptor (Heat Sink with Flange)
T	Tetra Screw Holes (H/S with 4 Holes)

Code	Light Distribution	
0L	Lambertian	without lens
1S	IESNA Type 1	short
1M	IESNA Type 1	medium
2S	IESNA Type 2	short(I)
2M	IESNA Type 2	medium(I)
7S	IESNA Type 2	short(L)
7M	IESNA Type 2	medium(L)
3S	IESNA Type 3	short(I)
3M	IESNA Type 3	medium(I)
8S	IESNA Type 3	short(I)
8M	IESNA Type 3	medium(L)
4S	IESNA Type 4	short(I)
4M	IESNA Type 4	medium(I)
9S	IESNA Type 4	short(L)
5S	IESNA Type 5	short
5M	IESNA Type 5	medium
15	15 deg	circular
25	25 deg	circular
40	40 deg	circular
50	50 deg	circular
65	65 deg	circular
85	85 deg	circular batwing
A0	100 deg	circular
C0	120 deg	circular batwing
58	50 x 80 deg	rectangular
9D	90 x 130 deg	rectangular

Nominal CCT(K)	Code
6500	P
5700	Q
5000	R
4500	S
4000	T
3500	U
3000	V
2700	W

Luminous Flux(lm)	Code(*)
6400~	9
4300~	8
3200~	7
2600~	6
2300~	5
2000~	4 (E)
1950~	3 (D)
1750~	2 (C)
1600~	1 (B)
1450~	0 (A)

(*) The Code May Be Changed by the Harness Type

(I) : optimized for Illuminance uniformity
(L) : optimized for Luminance uniformity