

## Class II 100W LED Controlgear : PA-1101-18 Series

### Product Features

- Universal AC Input
- High Power Factor
- Low Total Harmonic Distortion
- Short Circuit / Open Circuit / Over Voltage / Over Temperature Protections
- Suitable for Dry & Damp Location
- Adjustable Output Current by Dimming Input
- RoHS Compliant

### AC Input / DC Output

• AC Input Voltage	90 ~ 305Vac (100 ~ 277Vac)
• AC Input Frequency	47 ~ 63Hz (50-60Hz)
• Max. Input Current @ 90Vac (50Hz)	1.5A
• Min. PF @ 120Vac (50Hz) / 140V Output	0.96
• Min. PF @ 230Vac (50Hz) / 140V Output	0.95
• Min. PF @ 277Vac (60Hz) / 79V Output	0.9
• Max. THD @ 120-277Vac / Output at 55.3W	20%
• Min. Eff. @ 120 & 277Vac / 140V Output	88%
• Turn On Delay Time	<3 second
• DC Output Current	700mA
• Line Regulation	±3%
• Load Regulation	±5%
• DC Output Voltage Range	56 ~ 140V
• Ripple Current	±20%
• DC Output Isolation	yes

### EMC


• EMI	FCC Class A
• Harmonic Current Emissions	EN61000-3-2
• Voltage Fluctuations & Flicker	EN61000-3-3
• Electrostatic Discharge (ESD)	EN61000-4-2 ±4KV (Contact), ±8KV (Air)
• RS Immunity Test	EN61000-4-3 80MHz ~ 1GHz, 3V/m, 80% AM (1KHz)
• Electrical Fast Transient	EN61000-4-4 ±1KV for AC power line, ±0.5KV for DC / signal line
• Lighting Surge	EN61000-4-5 ±4KV (Com.), ±4KV (DiF)
• CS Immunity Test	EN61000-4-6 0.15MHz ~ 80MHz, 3V, 80% AM (1KHz)
• Voltage Dips & Short Interruptions	EN61000-4-11 30%, 25 cycles voltage reduction 100%, 0.5 cycles voltage reduction

### Operating Environments / Reliability

- Operating Temperature / Humidity -40 ~ 60°C / 10 ~ 95% RH
- Storage Temperature / Humidity -40 ~ 80°C / 10 ~ 95% RH
- Vibration (with shipping container) 1.146Grms / 5~200Hz / six sides  
30 minutes / side
- Vibration (operation) 6Grms / 10~1000Hz / X/Y/Z axis  
15 minutes / axis
- MTBF (Note 3) 50,000 Hrs while Tc ≤ 75°C  
100,000 Hrs while Tc ≤ 65°C  
80°C
- Tc free air convection
- Cooling meet Class A sound rating
- Sound Level

### Mechanical

- AC Input Terminal 170mm / black(L) & white(N) color / UL1316
- DC Output Terminal 170mm / red(DC+) & blue(DC-) color / UL1316
- Dimming Input Terminal 170mm / purple(dim+) & gray(dim-) color / UL1316
- Weight (typ.) 900g
- Outline Dimension 240mm(L) \* 60mm(W) \* 34mm(H)

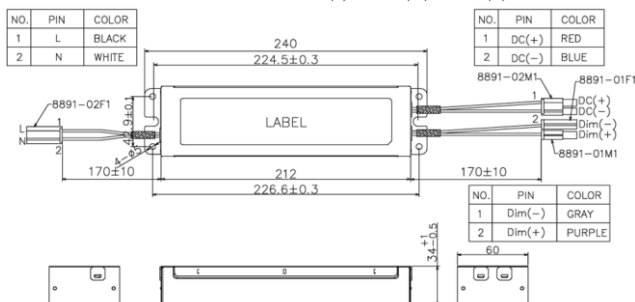

### Protections

- OVP or Open Circuit constant voltage, 173V max.
- SCP auto recovery
- OTP output power decrease

### Safety / Certifications

- Hi Pot (AC I/P to O/P) 3750Vac / 10mA / 60Sec.
- Hi Pot (AC I/P to Case) 3750Vac / 10mA / 60Sec.
- Insulation (AC I/P to O/P) >20MΩ, 500Vdc
- Complied with UL8750, 1st Edition
- Complied with UL60950-1, 2nd Edition
- Complied with CAN/CSA-C22.2 No.250.13-14
- Complied with CAN/CSA-C22.2 No.60950-1-07,2nd Edition
- Complied with IEC 61347-2-13:2006(First Edition)
- Complied with IEC 61347-1:2007(Second Edition) +A1:2010+A2:2012

### Dimming Input

- Support 2 in 1 Dimming Function
- Resistor Dimming Range (10-100K)
- Voltage Dimming Range (1-10V)
- Resistor Dimming Reference Table

Resistor Dimming	75KΩ ±1%	48.7KΩ ±1%
Output Current	540mA	350mA
Tolerance	±10%	±10%

- Voltage Dimming Reference Table

Voltage Dimming	7.7V	5V
Output Current	540mA	350mA
Tolerance	±10%	±10%



### Notes :


- (1) above definition is based on 25°C ambient if not specified
- (2) this LED driver is designed and intended for operating with LED load only
- (3) MTBF evaluation is based on SR-332 method, 115Vac/60Hz, max load
- (4) to measure efficiency after burn-in 30 minutes with full output load
- (5) recommend to install the controlgear inside the enclosure




# ClassII100W LED Controlgear : PA-1101-18 Series

## Performance Curves


• Power Factor (PF / Output Power)

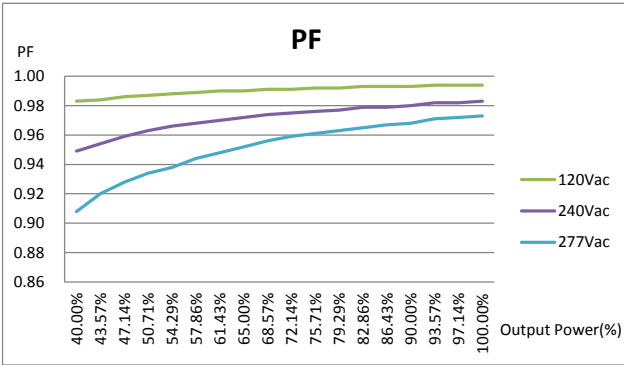


• THD (THD / Output Power)

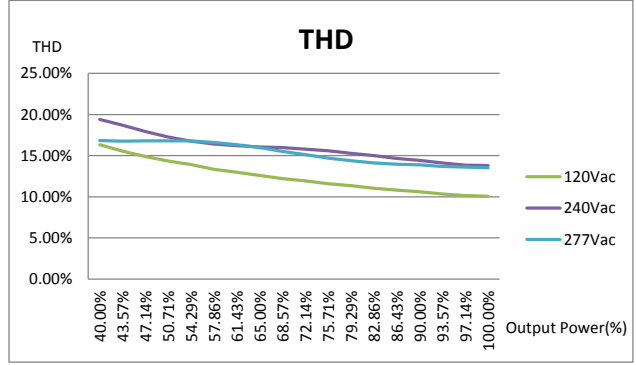


• Efficiency (Eff. / Output Power)

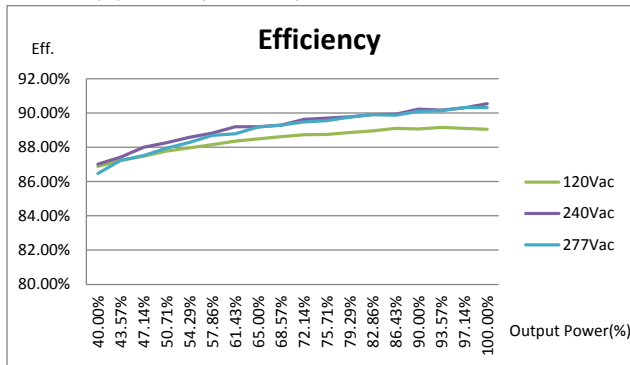


• Output Current Tolerance (Tolerance / Output Power)

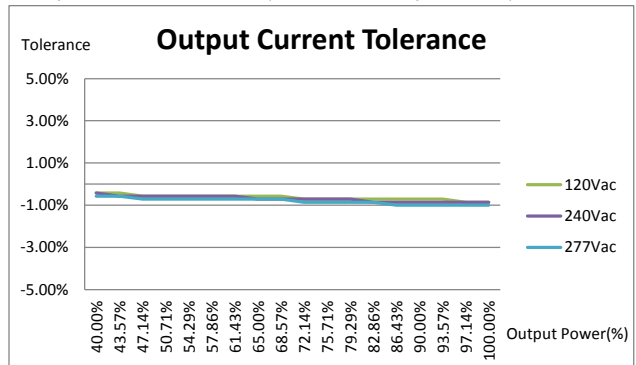


• PF>0.9 & THD<20% Operating Range (120Vac/60Hz Input)

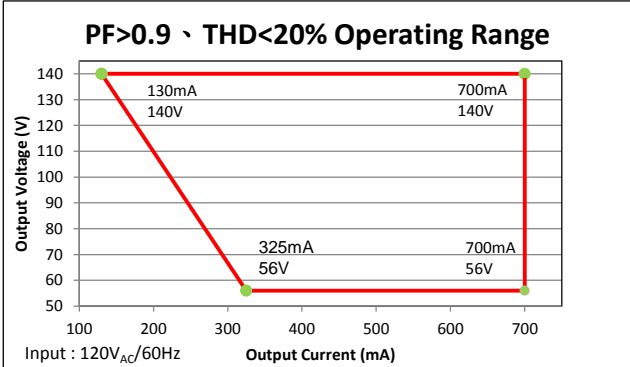

• PF>0.9 & THD<20% Operating Range (240Vac/50Hz Input)

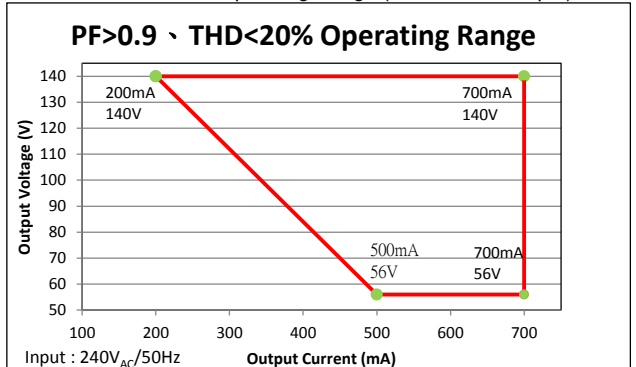

• PF>0.9 & THD<20% Operating Range (277Vac/60Hz Input)

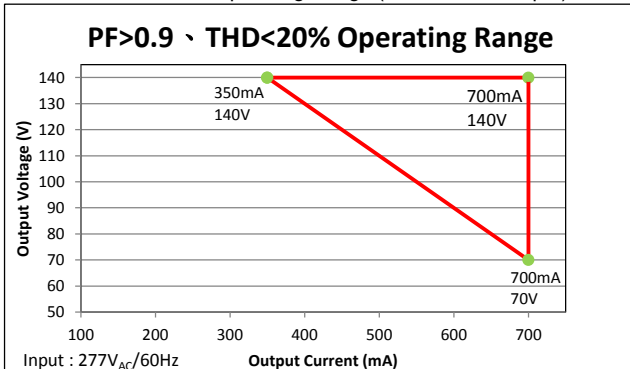

**Notes :**

- (1) experimental instruments :  
AC Source : Chroma 61604 / Power Analyzer : Chroma 6630 / Electrical LED Load : Prodigit 3312F / Oscilloscope : Tektronix TDS3014C / Multimeter : Fluke 287
- (2) all above curves are measured under 25°C ambient
- (3) all above curves are only for design reference