

ASSEMBLED FIGURE


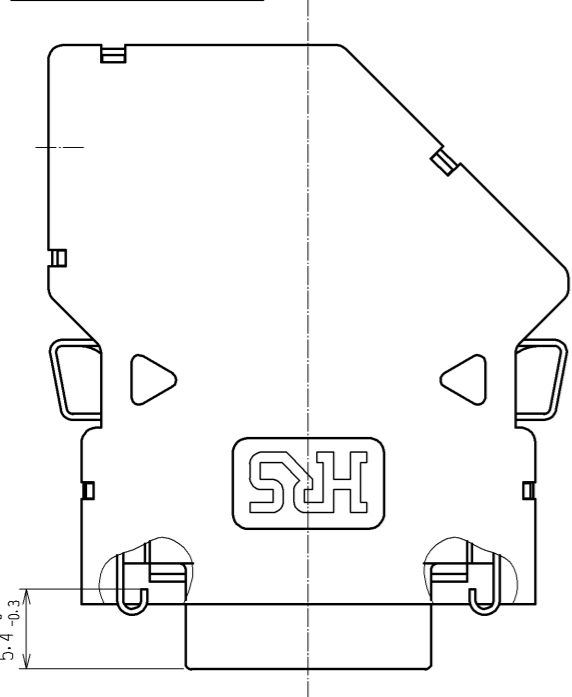


FIGURE OF CABLE EXIT DIRECTION

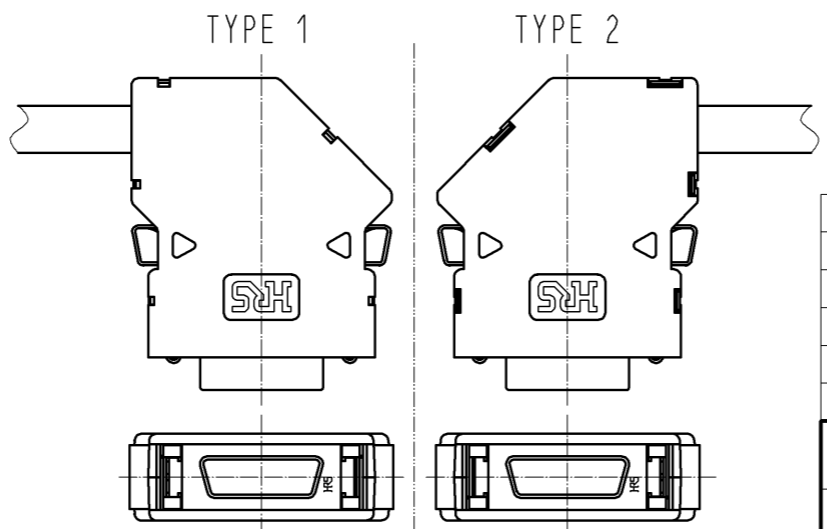

- NOTES
- PART No. ③ IS ASSEMBLED INTO PART No. ①.
PART No. ②, ④ AND ⑤ ARE NOT ASSEMBLED WHEN DELIVERED.
 - OUTER DIAMETER OF APPLICABLE CABLE IS $\phi 8.5 \pm 0.3$.
 - CABLE EXIT DIRECTION DEPENDS ON THE WAY CONNECTOR UNIT IS ASSEMBLED.
 - SCREW TIGHTENING TORQUE SHALL BE 0.22 N · m.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
5	STEEL	OVERPLATING :NICKEL PLATING 2μm min UNDER PLATING:COPPER PLATING 1μm min	10	STEEL	OVERPLATING :NICKEL PLATING 1μm min UNDER PLATING:COPPER PLATING 5μm min
4	STAINLESS STEEL		9	PPS	BROWN, UL94V-0
3	STAINLESS STEEL		8	PPS	BROWN, UL94V-0
2	PC	GRAY, UL94V-0	7	PHOSPHOR BRONZE	CONTACT AREA :GOLD PLATING 0.3μm min LEAD AREA :TIN PLATING 1μm min UNDER PLATING:NICKEL PLATING 2μm min
1	PC	GRAY, UL94V-0	6	PHOSPHOR BRONZE	

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED :RI. TAKAYASU			12.07.25	DRAWING NO. EDC3-122493-02		
CHECKED :EJ. WAKATSUKI			12.07.25	PART NO. FI40B-2015S-CVS(50)		
DESIGNED :TS. ITO			12.07.25	CODE NO. CL230-0533-0-50		
DRAWN :TY. ITO			12.07.21			