

4

3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
© COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC |     | DIST                      |         | REVISIONS |      |  |  |
|-----|-----|---------------------------|---------|-----------|------|--|--|
| P   | LTR | DESCRIPTION               | DATE    | DWN       | APVD |  |  |
|     | A   | RELEASE PER ECR-15-000195 | 09JAN15 | SW        | RZ   |  |  |

PART NUMBER  
2064874-1

NOTES:

1. MAXIMUM INSERTION LOSS IS 0.5 dB AT 850 & 1300nm.
2. MINIMUM RETURN LOSS: 20dB AT 850 & 1300nm
3. INCLUDE IL & RL TEST DATA WITH EACH LOOPBACK
4. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE STANDARD TEC-138-702.

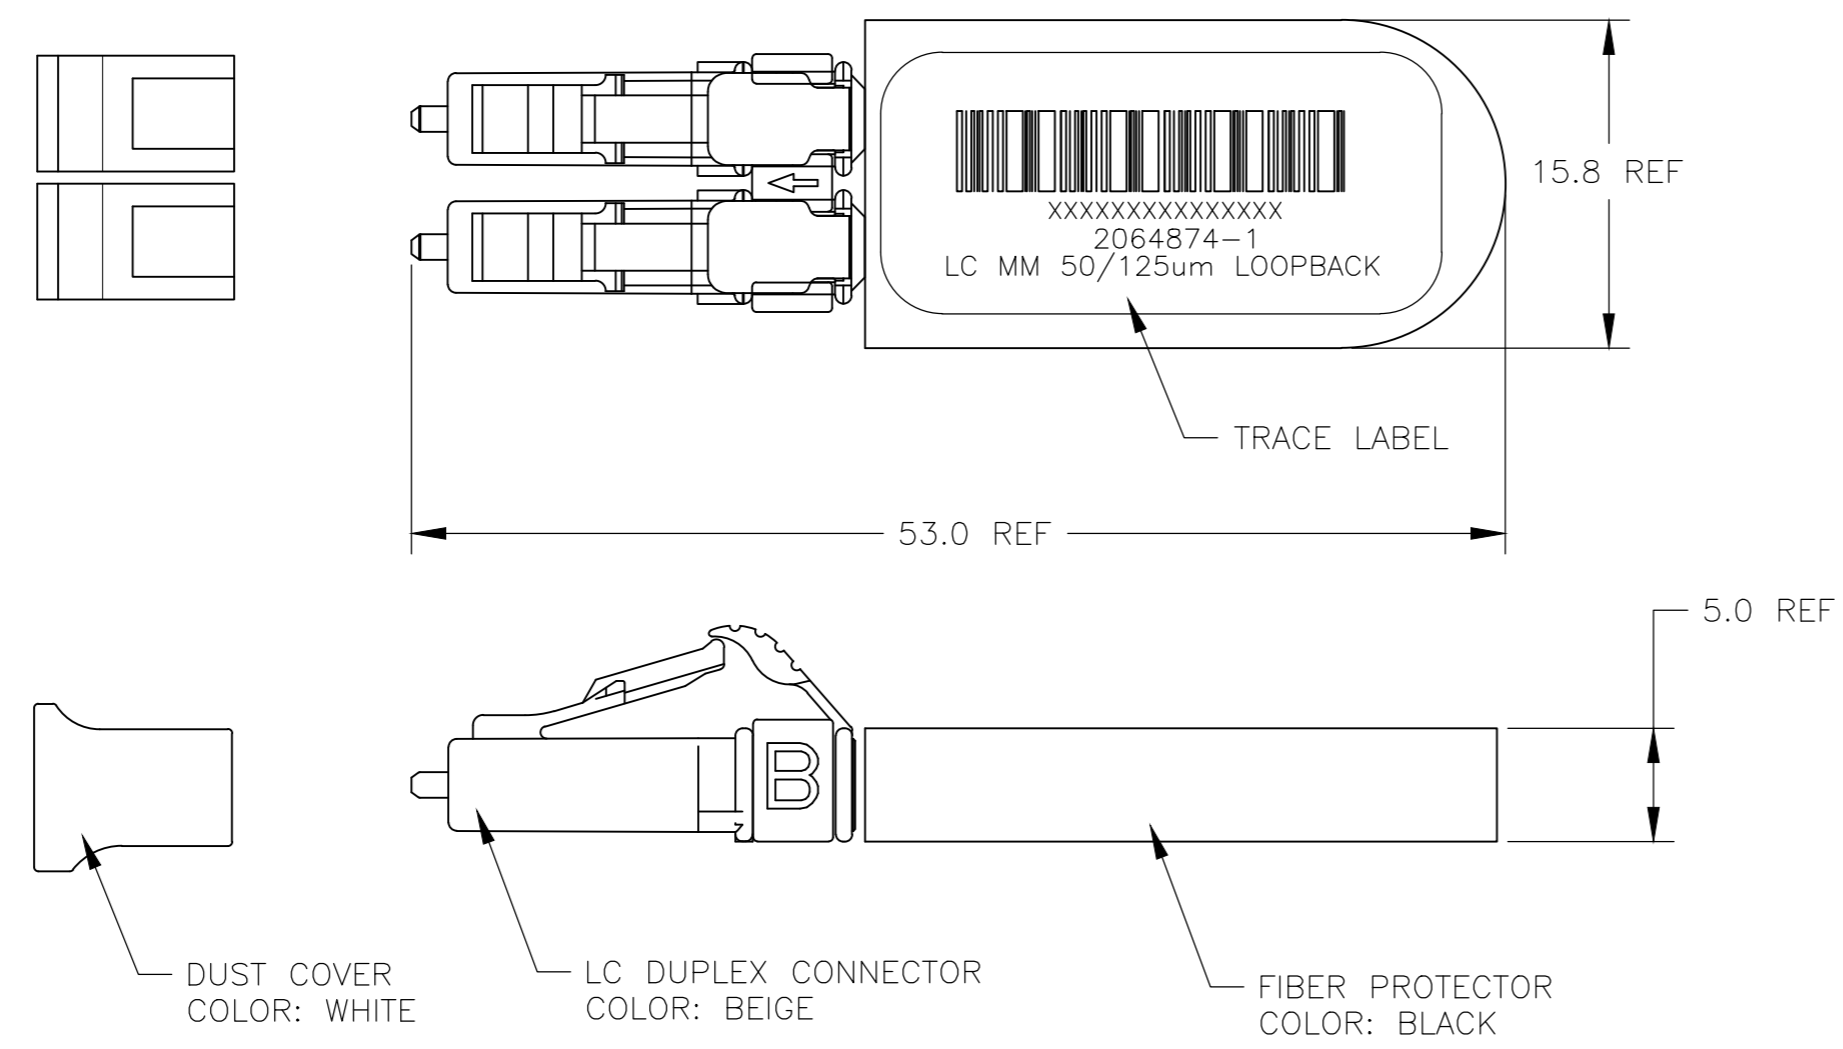

2064874

|   |  |                                  |  |                    |                         |
|---|--|----------------------------------|--|--------------------|-------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                      |  | DWN<br>SIMON WU<br>16OCT12       | <b>STE</b> TE Connectivity                                       |                    |                         |
| DIMENSIONS:<br>mm   |  | CHK<br>KIM ZHANG<br>16OCT12      |  |                    |                         |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:                                      |  | APVD<br>RICHARD ZHAO<br>16OCT12  | NAME<br>CABLE ASSY, FIBER OPTIC, MM 50/125<br>LC DUPLEX LOOPBACK |                    |                         |
| 0 PLC ± -<br>1 PLC ± -<br>2 PLC ± -<br>3 PLC ± -<br>4 PLC ± -<br>ANGLES ± - |  | PRODUCT SPEC<br>APPLICATION SPEC | SIZE<br>A2   | CAGE CODE<br>00779 | DRAWING NO<br>C-2064874 |
| MATERIAL<br>-   |  | FINISH<br>-                      | WEIGHT<br>-  | CUSTOMER DRAWING   | RESTRICTED TO<br>-      |
|   |  |                                  | SCALE<br>NTS   | SHEET<br>1 OF 1    | REV<br>A                |