

# Surge protection device - TT-ST-2/2-S-24DC - 2920735


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Spring cage modular terminal block with integrated surge protection, for assembly on NS 35/7.5, voltage  $U_N$  24 V DC, terminal width: 6.2 mm, cover width: 2.2 mm



## Key Commercial Data

Packing unit	10 STK
GTIN	 4 046356 168373
GTIN	4046356168373

## Technical data

### Dimensions

Height	100 mm
Width	6.2 mm
Depth	63.5 mm

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP20

### General

Housing material	PA 6.6
Flammability rating according to UL 94	V-0
Color	black
Standards for clearances and creepage distances	EN 60664-1
Mounting type	DIN rail: 35 mm
Type	Double-level terminal block
Number of positions	2
Direction of action	Line-Earth Ground

### Protective circuit

# Surge protection device - TT-ST-2/2-S-24DC - 2920735

## Technical data

### Protective circuit

IEC test classification	C1
	C3
VDE requirement class	C1
	C3
Nominal voltage $U_N$	24 V DC
Maximum continuous voltage $U_C$	30 V DC
	21 V AC
Rated current	10 A (50 °C)
Operating effective current $I_C$ at $U_C$	$\leq 5 \mu\text{A}$ (DC)
	$\leq 20 \mu\text{A}$ (60 Hz)
Residual current $I_{PE}$	$\leq 10 \mu\text{A}$ (DC)
	$\leq 40 \mu\text{A}$ (60 Hz)
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (line-earth)	310 A (per path)
Total discharge current $I_{total}$ (8/20) $\mu\text{s}$	620 A
Nominal pulse current $I_{an}$ (10/1000) $\mu\text{s}$ (line-earth)	62 A (per path)
Output voltage limitation at 1 kV/ $\mu\text{s}$ (line-earth) spike	$\leq 45$ V
Output voltage limitation at 1 kV/ $\mu\text{s}$ (line-earth) static	$\leq 45$ V
Residual voltage at $I_n$ (line-earth)	$\leq 48$ V
Residual voltage with $I_{an}$ (10/1000) $\mu\text{s}$ (line-earth)	$\leq 48$ V
Voltage protection level $U_p$ (line-earth)	$\leq 45$ V (C1 - 250 A)
Response time $t_A$ (line-earth)	$\leq 1$ ns
Input attenuation $aE$ , asym.	typ. 0.3 dB ( $\leq 1$ MHz / 50 $\Omega$ )
	typ. 0.1 dB ( $\leq 150$ kHz / 150 $\Omega$ )
Cut-off frequency $f_g$ (3 dB), asym. (GND) in 50 Ohm system	typ. 3 MHz
Cut-off frequency $f_g$ (3 dB), asym. (GND) in 150 Ohm system	typ. 500 kHz
Capacity (line-earth)	$\leq 2$ nF
Surge protection fault message	none
Max. required back-up fuse	10 A (T)
Impulse durability (line-earth)	C1 - 500 V / 250 A
	C3 - 25 A
Alternating current carrying capacity (line-earth)	2 A (5x 1 s)

### Connection data

Connection method	Spring-cage connection
Connection method IN	Spring-cage
Connection method OUT	Spring-cage
Stripping length	8 mm
Conductor cross section flexible	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section solid	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

# Surge protection device - TT-ST-2/2-S-24DC - 2920735

## Technical data

### Standards and Regulations


Standards/regulations	IEC 61643-21
	EN 61643-21
Standards/specifications	IEC 61643-21/A1 2008
	EN 61643-21/A1 2009

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Dimensional drawing

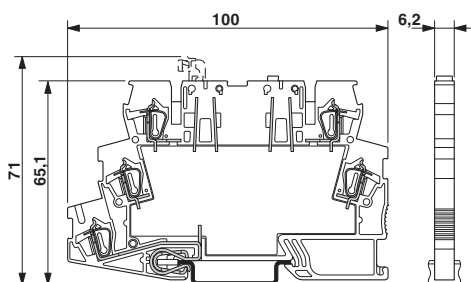

## Approvals

### Approvals

Approvals

UL Listed / EAC / DNV GL

Ex Approvals

### Approval details

UL Listed		<a href="http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm</a>	FILE E 138168
-----------	--	---	---------------

EAC		RU C- DE.A*30.B01561
-----	--	-------------------------

## Surge protection device - TT-ST-2/2-S-24DC - 2920735

### Approvals

DNV GL

<http://exchange.dnv.com/tari/>

TAE00001N7

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>