

78030 PRODUCT DETAILS

<i>Property</i>	<i>Details</i>
<i>Height</i>	2.36 in (59.94 mm)
<i>Width</i>	2.90 in (73.66 mm)
<i>Perimeter</i>	39.75 in
<i>Weight</i>	2.2 lb per foot (3.27 kg per meter)
<i>Material</i>	6063-T5 Aluminum Extrusion Alloy




THERMAL DATA

Natural Convection: 1.76 based on 70 C temp rise above ambient


Thermal resistance is calculated based on a single 1" (25.4mm) square heat source centered on the heat sink. If you have distributed loads, then you can expect 10% better performance in natural convection and 20% better performance in forced convection.

Natural Convection

Heat Sink Temperature Rise Above Ambient

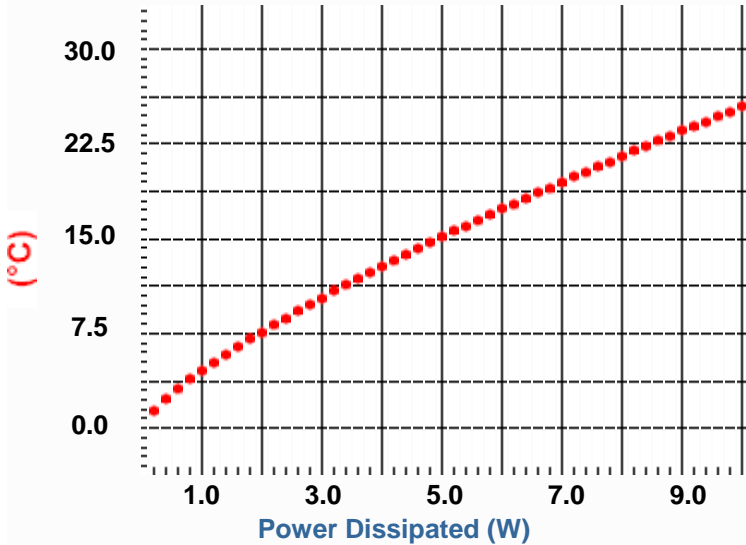


Heat Sink Thermal Resistance

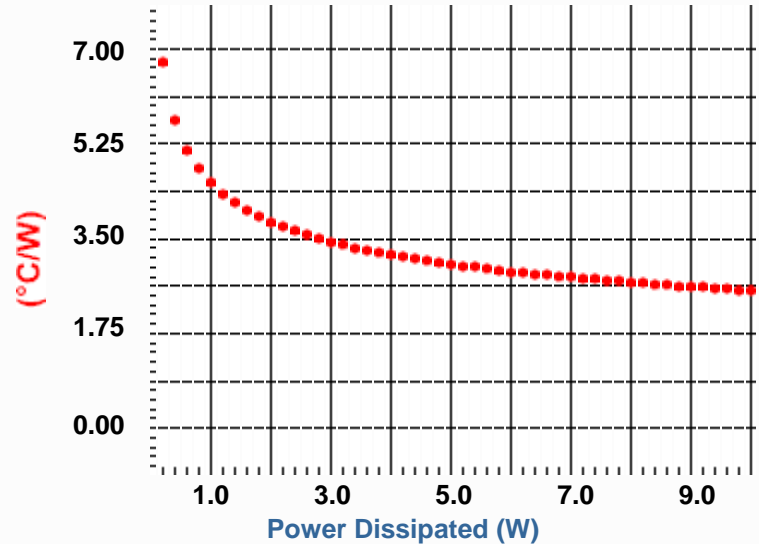

Forced Convection

Heat Sink Temperature Rise Above Ambient (10W Dissipated)

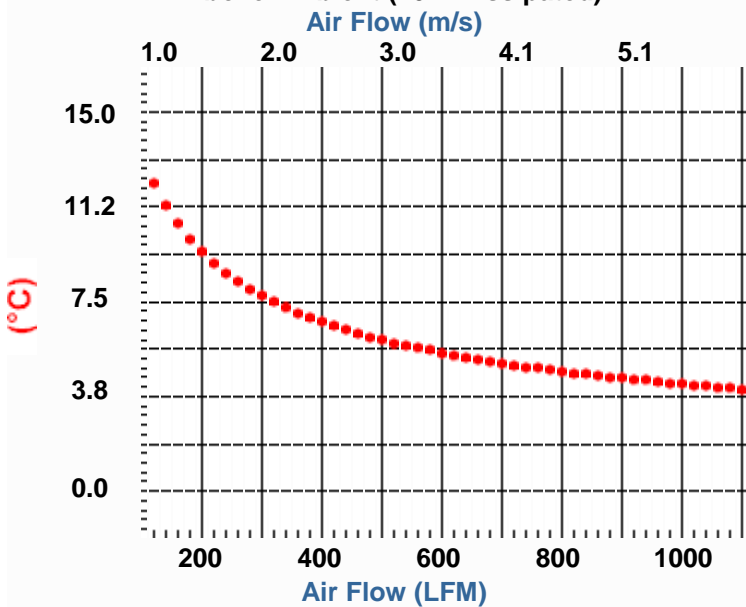

Heat Sink Thermal Resistance

