



5

4



3

2

1

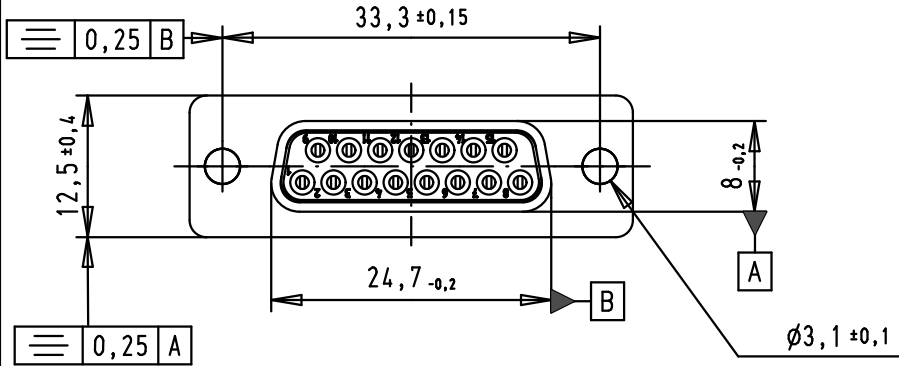

Solder buckets for AWG 20 Max

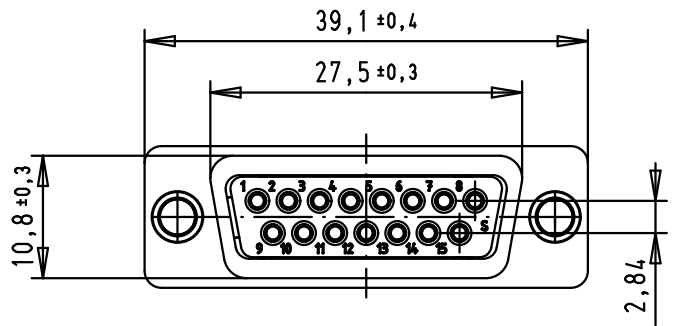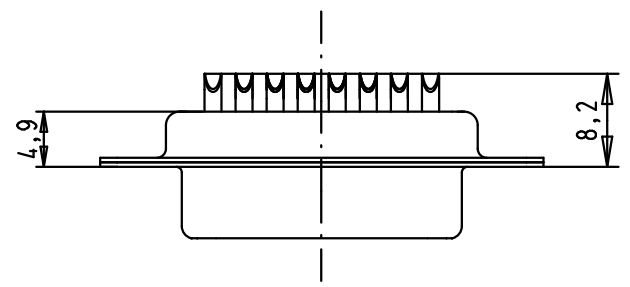

SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	47pf±20%
Working Voltage	100v
Current Rating	7,5A
Insulation Resistance	>1GΩ



FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

D

C

B

A

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4
			Detail.	8-JUL-02	CV	
			Insp.	12/01/12	JB	
			Stand.			
36283	12/01/12	SD	HARTING EURL			 F-95972 Paris
33250	03/11/05	JMDR	Mod.	Dat.	Name	
31058	8-JUL-02	CV				

D-Sub, female, straight 15 Poles, turned solder buckets, with holes

Ma?Mstab/Scale

1.5:1

TB 09642117210

Blatt/ Page

1 / 1

Sub.