




CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	9-7 @20°C	TBD ohms max.
D.C. RESISTANCE	5-1 @20°C	TBD ohms max.
INDUCTANCE	9-7 60kHz, 1VAC, Ls	250uH ±10%
LEAKAGE INDUCTANCE	9-7 80kHz, 1VAC, Ls (tie 1+5)	36.0uH ±10%
DIELECTRIC	9-5 tie(5+1, 7+9), 1200VDC, 1 second	1000VDC, 1 minute
URNS RATIO	(9-7):(5-1)	20:1, ±3%

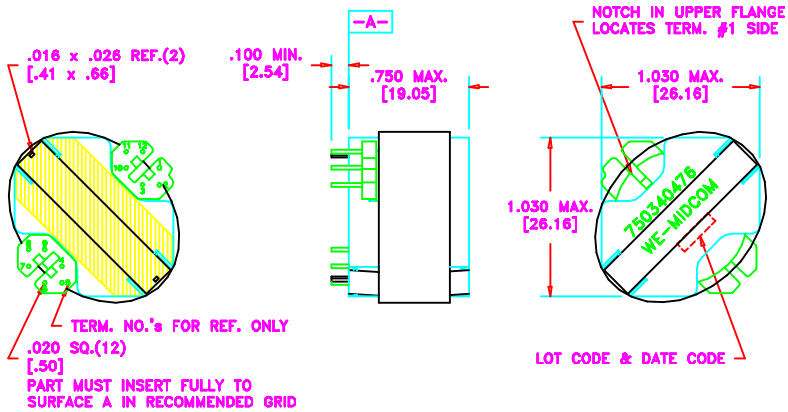

RECOMMENDED
 (P.C. PATTERN, COMPONENT SIDE)
 .100[2.54] GRID

REV.	DATE
00	2/09

Packaging Specifications
 Method: Tray
 PKG-0028
 www.midcom-inc.com

Unless otherwise specified:
 Tolerances: Fractions: ±1/64
 Angles: ±1° Decimals: ±.005[.127]

This drawing is dual dimensioned. Dimensions
 in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750340476



DRAWING NO.
750340476

REVISIONS: SEE SHEET 1

SCALE ---

SHEET 2 OF 5