





BACK VIEW

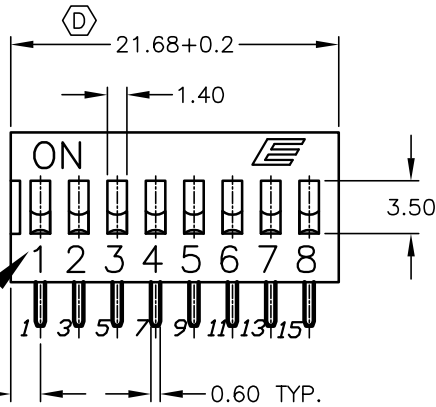

POS 1 DESIGNATES
PIN #1 LOCATION

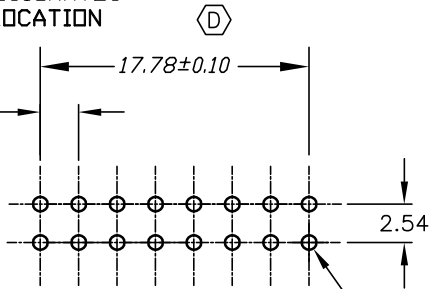

RECOMMENDED P.C.B. LAYOUT

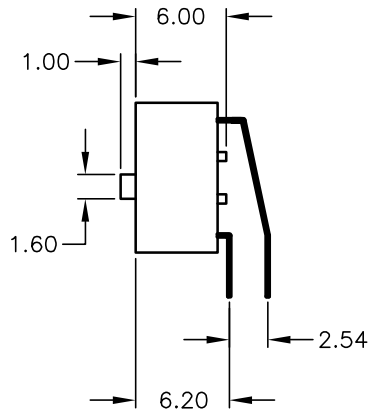

CIRCUIT (SHOWN 8 POS)

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC.
5. MATERIAL (TERMINALS/CONTACTS):
PHOSPHOR BRONZE w/Gold Plate over
Nickel Plate
6. INSULATION RESISTANCE:
100Mega-OHMS min @500VDC
7. CONTACT RESISTANCE (INITIAL):
50mILLI-OHMS @2-4VDC @100mA
8. OPERATING FORCE: 1000gf max.
9. TRAVEL: 2mm typical
- ▲ 10. PACKAGED: DISPENSING TUBES
WITH ALL POLES IN THE "OFF" POSITION.
11. ▲ DESIGNATE MAJOR:

D	14149	CORRECT DIMS	7/6/04	AR
C	13541	REMOVE TABLE	10/17/03	AR
B	11799	REVISED AND REDRAWN	10/29/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE

KAS 2108 E

SCALE

2:1

DATE

10/29/01

DR

CJB

DWG

N321080

REV

D