

MODELS:

PDU3VN3G30, PDU3VN6G30B, PDU3VN10G30

3-Phase Monitored Rack-Mount PDU



200/208/240V
3-Phase Input



30A Blue IEC 309
3P+E Plug



200/208/240V
Single-Phase
Output



48 Total
Outlets



10kW Load
Capacity



Multimode
Load Meter









0U
Rackmount



Toolless
Mounting
Buttons

- A** Digital Load Meter
 - B** C13 and C19 Outlets
 - C** 20A Circuit Breakers (x3, One per Outlet Load Bank)
 - D** Plug-Lock Cable Retention Inserts
 - E** Removable Mounting Brackets
 - F** Toolless Mounting Buttons with Removable 90° Rotation Brackets
 - G** PDU3VN3G30: 3-ft. Input Power Cord
PDU3VN6G30B: 6 ft. Input Power Cord
PDU3VN10G30: 10-ft. Input Power Cord
 - H** 30A Blue IEC 309 3P+E Input Plug (IP44)
 - I** Durable Metal Housing
 - J** Network Interface
 - K** RJ45 Ethernet Jack
 - L** Manual Configuration Port
 - M** Environmental Monitoring Port
 - N** Network Interface Reset Button
- Also Includes:
Owner's Manual,
PowerAlert Software
CD-ROM

Multimode Load Meter: Display the load for any phase or bank, display temperature or humidity (requires optional EnviroSense sensor), display the IP address or rotate the display 180°.

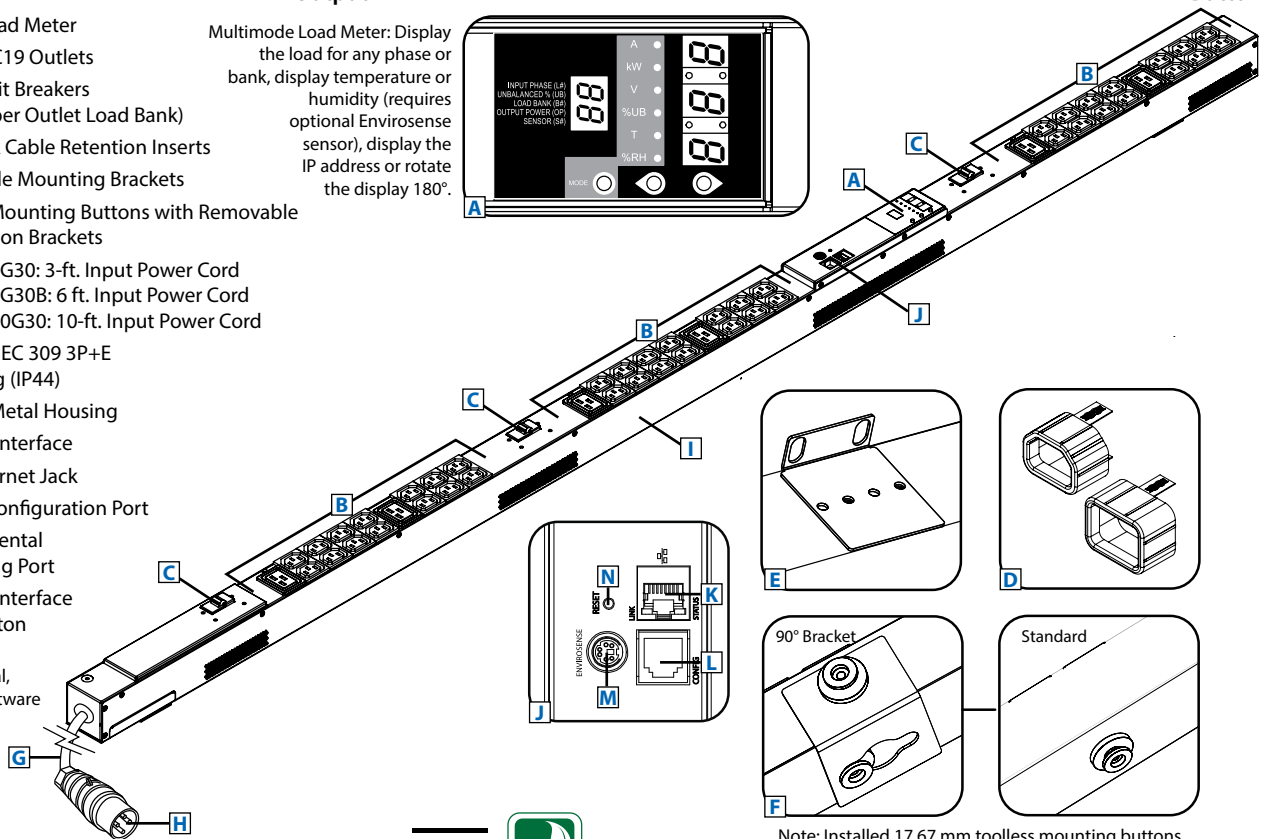

Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.

Specifications

Models	PDU3VN3G30, PDU3VN6G30B, PDU3VN10G30
Voltage	200/208/240V (3-Phase Input/Single-Phase Output)
Frequency	50/60Hz
Load Capacity	8.3/8.6/10kW
Input Plug	30A Blue IEC 309 3P+E
Input Cord Length	PDU3VN3G30: 3 ft., PDU3VN6G30B: 6 ft., PDU3VN10G30: 10 ft.
Outlets	48 (42 C13 / 6 C19)
Primary Mounting Option	0U (Vertical) Rackmount
Shipping Weight	PDU3VN3G30: 22 lbs. PDU3VN6G30B: 22 lbs. PDU3VN10G30: 20 lbs.
Unit Weight & Dimensions	PDU3VN3G30: 15.2 lbs. / 70 x 2.17 x 2.86 in. PDU3VN6G30B: 15.2 lbs. / 70 x 2.17 x 2.86 in. PDU3VN10G30: 12.6 lbs. / 70 x 2.17 x 3.58 in. <i>See next page for detailed unit measurements.</i>
Certifications	Tested to UL 60950-1 (US & Canada), NOM (Mexico), FCC Class A, RoHS, TAA Compliant






Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

- Distributes power to 48 outlets (14 C13 and 2 C19 per phase)
- Remote monitoring and control via SNMP, Web or Telnet
- Displays load for any output phase in real time
- Perfect for rack-mount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.triplite.com

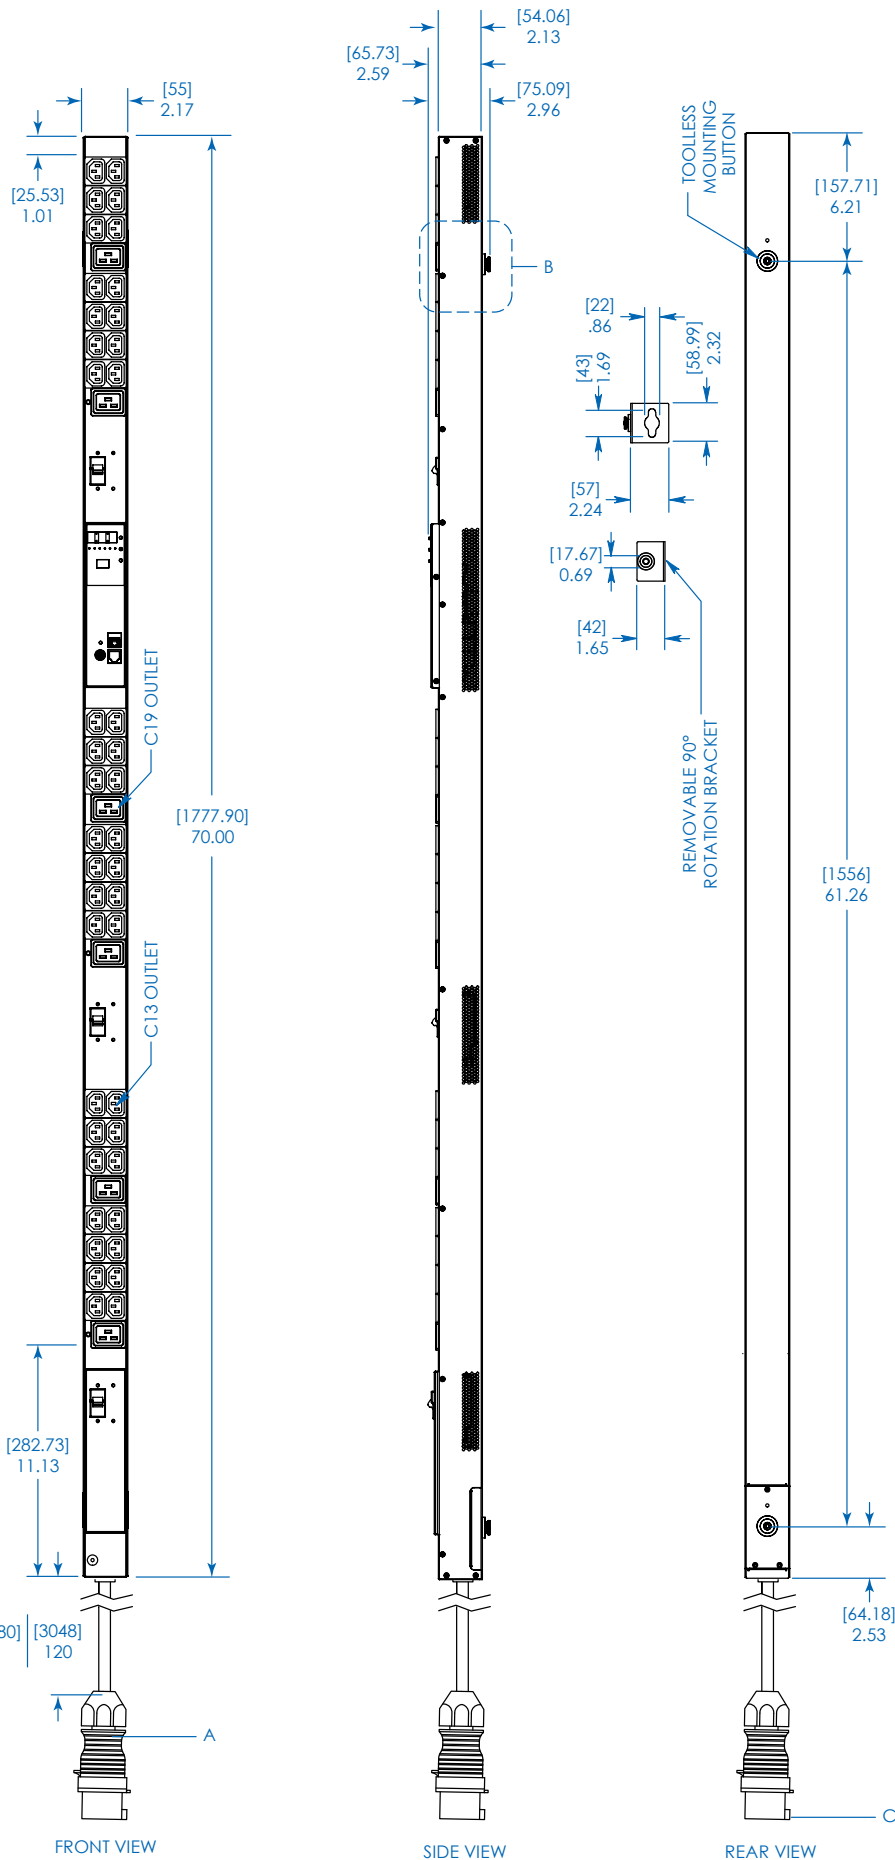

MODELS:
PDU3VN3G30,
PDU3VN6G30B,
PDU3VN10G30



1111 W. 35th Street
 Chicago, IL 60609 USA
 773.869.1234
 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.