

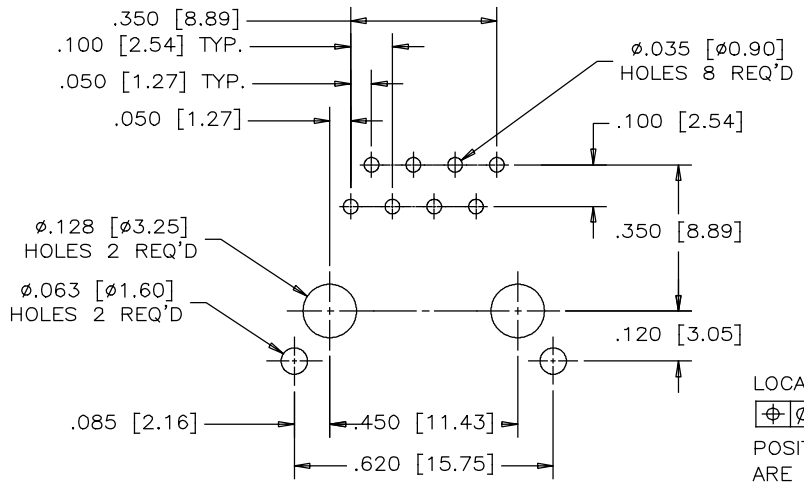
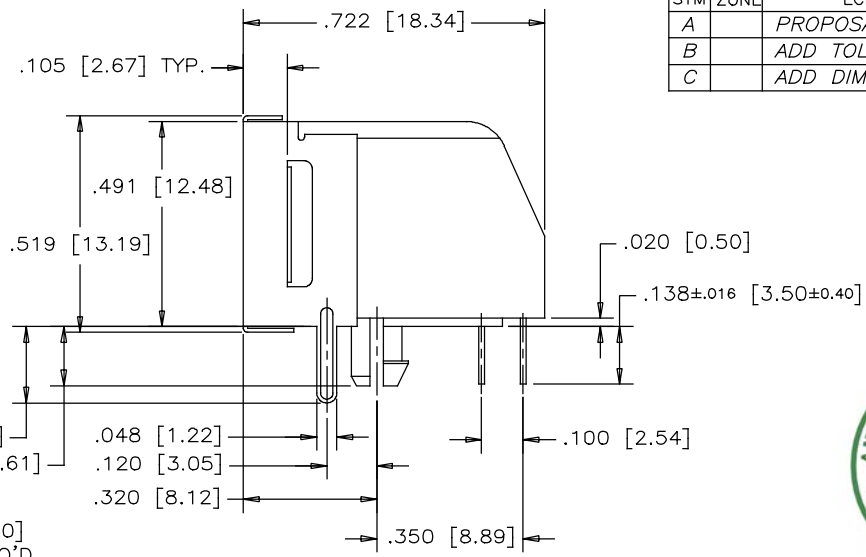


REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	05/04/07	L.CHAN
B		ADD TOLERANCE.	JAN25/13	L.CHAN
C		ADD DIM.	APR15/13	L.CHAN

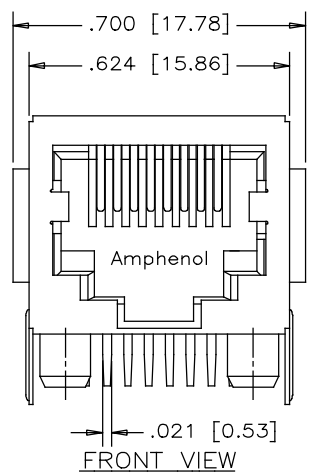

LOCATE HOLES  
 $\phi \pm \phi.005 [0.13]$   
 POSITION DIMENSIONS  
 ARE BASIC

RECOMMENDED P.C.B. LAYOUT  
 (COMPONENT SIDE OF BOARD)

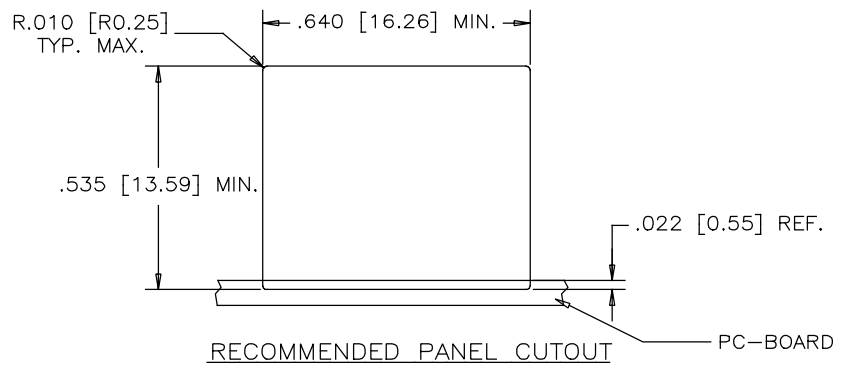

RECOMMENDED PANEL CUTOUT

SIDE VIEW

MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC  
 FLAMMABILITY RATING UL94V-0

CONTACTS:

PHOSPHOR BRONZE  
 PLATING: REFER TO PART NUMBER FOR GOLD  
 THICKNESS ON MATING SURFACES.  
 50  $\mu$ " [1.27 MICRONS]  
 MIN. NICKEL UNDERPLATE.  
 100  $\mu$ " [2.54 MICRONS]  
 MIN. MATTE TIN ON CONTACT TAILS.

SHIELD:

COPPER ALLOY, NICKEL PLATED

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:  
 $\pm 0.015 [\pm 0.38MM]$ .

AMPHENOL PART NUMBER: RJE03-188-2X20

- 1 = 06  $\mu$ " GOLD
- 2 = 15  $\mu$ " GOLD
- 3 = 30  $\mu$ " GOLD
- 4 = 50  $\mu$ " GOLD

DRAWN PAUL WANG	DATE 05/04/07
DESIGNED	
CHECKED	
I. E. APPRD.	
Q. A. APPRD.	
DWG. APPRD.	
ENG. REL. NO.	
REF. EAR# 12704	
DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554

Amphenol Canada Corp.	
TITLE MODULAR JACK, PARTIAL SHIELD 8 POSITION, 8 CONTACTS, WITH SIDE FLANGES - RoHS COMPLIANT	
DWG DRAWING NO. P-RJE03-188-2X20	REV. C
SCALE	WT. _____ SURF. _____ SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION  
 MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING  
 PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.