CONNETTORE TIPO A (CON MOLLA DI RITEGNO ESTERNA)
CONNECTOR TYPE A (WITH EXTERNAL SPRING)

SCALA NON IMPEGNATIVA (DO NOT SCALE) | DIMENSIONI IN (DIMENSIONS IN) mm | METRIC | PROIEZIONE EUROPEA (EUROPEAN PROJECTION)

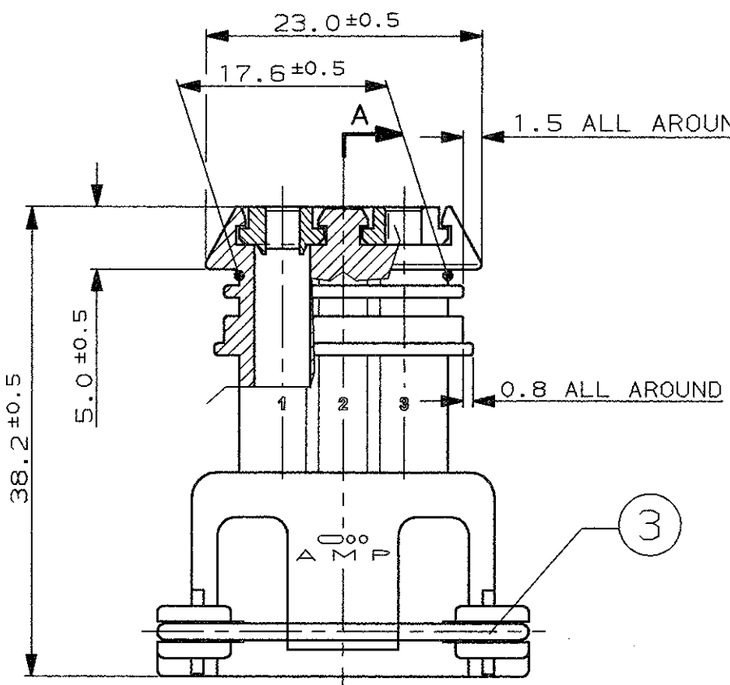

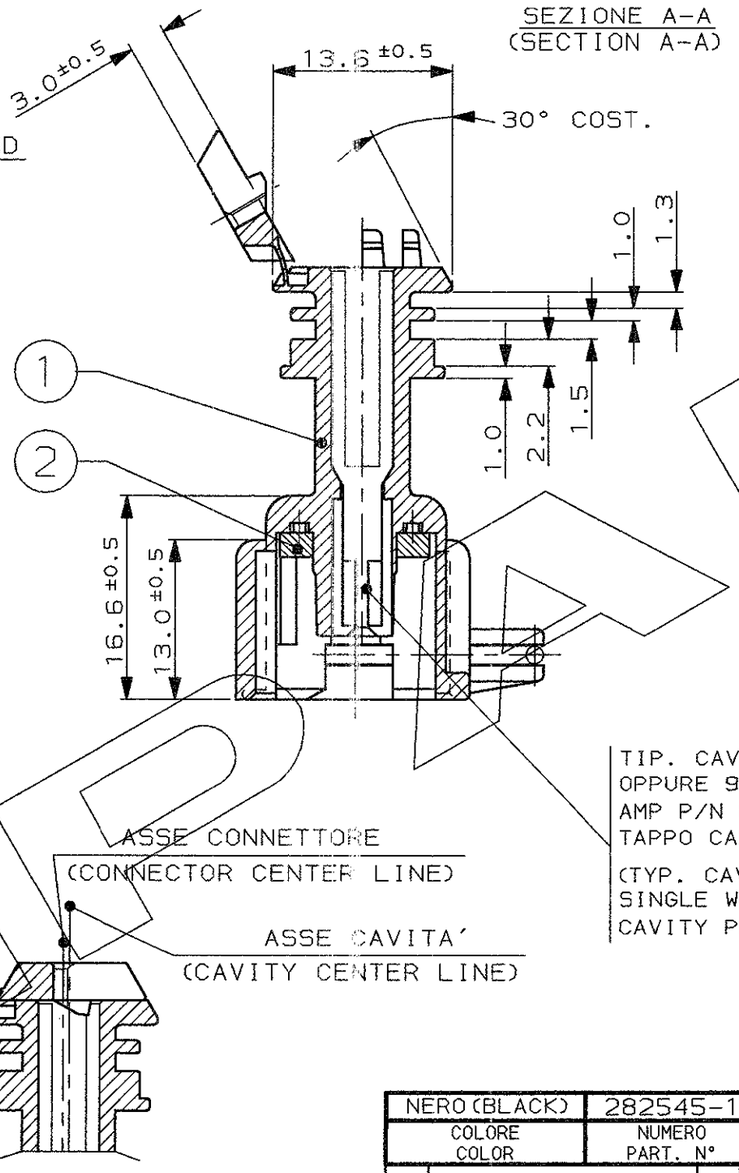

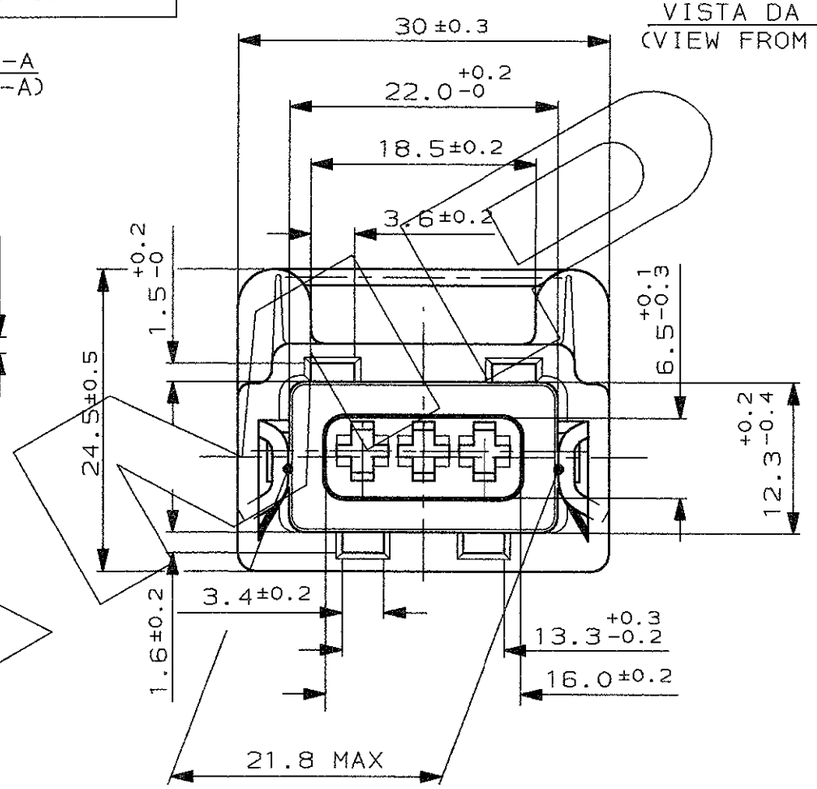

TIP. CAVITA'PER TERMINALI AMP JPT P/N 929939-...
OPPURE 929937-... E RELATIVI GOMMINI
AMP P/N 828904-1, 828905-1, 282536-1.
TAPPO CAVITA' P/N 828906-2

(TYP. CAV. FOR JPT CONT. P/N 929939-.. A/O 929937-.. AND REL.
SINGLE WIRE SEAL P/N 828904-1, 828905-1, 282536-1
CAVITY PLUG P/N 828906-2)

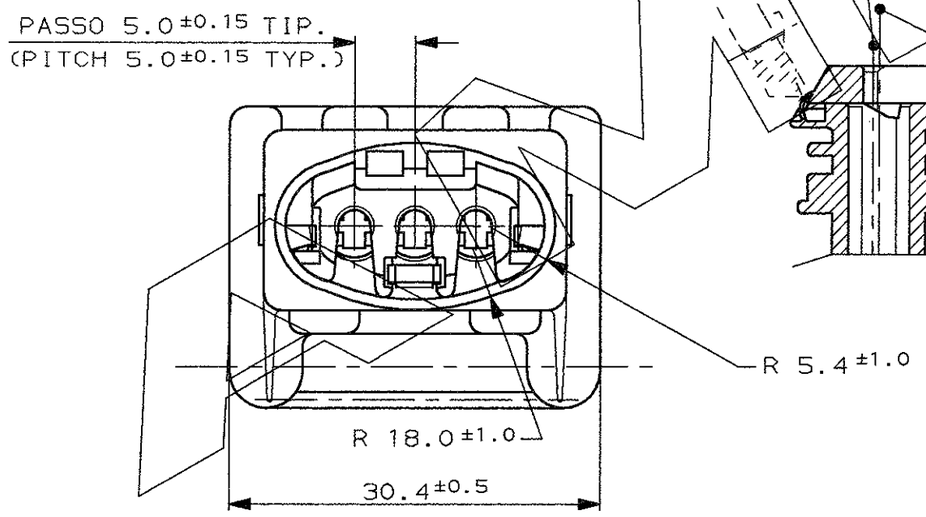

N° (ITEM)	FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	DESCRIZIONE (DESCRIPTION)
3	\\\\\\\	ACCIAIO INOX (STAINLESS STEEL)	MOLLA (SPRING)
2	NATURALE (NATURAL)	GOMMA (RUBBER)	GUARNIZIONE (RUBBER GASKET)
1	\\\\\\\	PA 6.6 C.VETRO (PA 6.6 G.F.)	BLOCCHETTO (HOUSING)

COLORE COLOR	NUMERO PART. N°	ASSY REV.
NERO (BLACK)	282545-1	F

REV.	REVISIONI (REVISION RECORD)	DIS. (DR)	E.C.N.	DATA (DATE)
M	REVISED	M.P.	ET00-0385-99	2-4 01
L	REVISED	A.F.	ET00-0221-96	27-5 '96
A	IN PRODUCTION	R.M.	ET00-0011-94	11-2 94
1	P/N WAS 93-51118-1	R.M.	---	31-8 93
0	FIRST ISSUE	R.M.	---	---

CUSTOMER DWG. FOR REFERENCE ONLY | DISEGNO PER CLIENTE SOLO PER RIFERIMENTO

THIS DRAWING IS UNPUBLISHED | RELEASE FOR PUBLICATION 19

© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING

TOLLERANZE: SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)
ANGOLI (ANGLES) ± 0.3 ± 2°

DIAM. ISOLANTE (INS. DIA. RANGE) 1.5-3.0 (REDUCED INS. CABLE)
RANGO FILO (WIRE RANGE) 0.5-2.5 mm²
SCALA (SCALE) ***

AMP ITALIA S.p.A.
Corso F.LLI Cervi, 15
COLLEGNO (TORINO)

DIS. 8 JULY 93 (DR.) R. MARTINI
CONT. 9 JULY 93 (CHK) C. TARTARI
APP. _ (APP.) _

DESCRIZIONE (DESCRIPTION)
3 W. SPLASH PROOF CONN. ASS'Y
with SPECIAL POLARIZATION

LOC.	SIZE	NUMERO (DWG NO)	REV.	FOGLIO (SHEET)
I	A3	C-282545	M	1 DI (OF) 2

DISTRIBUZIONE (PRINT DIST.)

AMP-ITA 7923 - 5/82

SCALA NON IMPEGNATIVA (DO NOT SCALE)
DIMENSIONI IN (DIMENSIONS IN) mm
METRIC
PROIEZIONE EUROPEA (EUROPEAN PROJECTION)

ASSE CONNETTORE
CONNECTOR CENTER LINE

ASSE CAVITA'
CAVITY CENTER LINE

5.00
0.15 X
R1.0 +0.2 -0
R1.5 +0.2 -0
6.7 +0.2 -0
3.0 0 -0.1
-Y-
0.5 ±0.05
1.4 0 -0.1
10.0
16.8 ±0.15
0.1 X
24.85 0 -0.2
0.1 Y
0.2 Y
V
X

1.8
1.6 0 -0.1
30° 0 -2° TUTTO IL PERIM. (ALL AROUND)
90°
12.2 MAX
1.0
9.5 ±0.15
1.5 +0.15 -0.45
0.5 0 -0.3
11.85 0 -0.2
DETTAGLIO X (DETAIL X)
OPZIONALE (OPTIONAL)
4 SFERICO (SPHERICAL)
0.4 +0.15 -0.05

21.82 0 -0.15
16.8 +0 -0.2
13.2 MAX
6.57 +0.15 -0
8.5 0 -0.1
3.9 ±0.1
25° ±1°
45°
0.1
0.1 X
0.08 X
6.68 +0.15 -0
13.1 +0 -0.15
21.65 +0 -0.15
-X-
1.8
10.5 0 -0.3
3.0 ±0.3

DETT. CONTATTO SC. 5:1
(TAB DETAIL SC. 5:1)
0.20 ±0.05
15°/45°
15° +3° -9°
1.0
0.8 ±0.05

18.22 0 -0.15
0.08 X
9.0 0 -0.2
11.78 +0.15 -0
0.1 X
13.0 MIN.
SCARICO OPZIONALE
(OPTIONAL HOLLOW)
VISTA DA 'V' (VIEW FROM 'V')
FLANGIA (FLANGE)
11.67 +0.15 0
18.3 MAX

1 QUOTE APPLICABILI PER SFORMATURA PEZZO (RIGHT DIMENSIONS FOR EXTRACTION ITEM FROM THE MOULD)

2 MATERIALE CONTATTI: LEGA DI RAME STAGNATA, ES. OTTONE STAGNATO.
(TAB MATERIAL: TINNED Cu ALLOY, E.G. TINNED BRASS)

3 MATERIALE BLOCCHETTO: TERMOPLASTICO CARICATO FIBRA VETRO.
(HOUSING MATERIAL: THERMOPLASTIC GLASS FIBER FILLED).

AMP

DISTRIBUZIONE (PRINT DIST.)

REV.	REVISIONI (REVISION RECORD)	DIS. (DR)	DATA (DATE)
	SEE SHEET 1 OF 2		

FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	NUMERO (PART NUMBER)
CUSTOMER DWG. FOR REFERENCE ONLY	DISEGNO PER CLIENTE SOLO PER RIFERIMENTO	

THIS DRAWING IS UNPUBLISHED | RELEASE FOR PUBLICATION 19

© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING

TOLLERANZE: SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES: UNLESS OTHERWISE SPECIFIED)	DIAM. ISOLANTE (INS. DIA. RANGE)	RANGO FILO (WIRE RANGE)	SCALA (SCALE)
± 0.3	SEE SHEET 1	SEE SHEET 1	***
ANGOLI (ANGLES) ± 2°			

AMP ITALIA S.p.A.
Corso F.lli Cervi, 15
COLLEGNO (TORINO)

DIS. (DR.)
CONT. (CHK)
APP. (APP)
SEE SHEET 1 OF 2

DESCRIZIONE (DESCRIPTION)
3 W. SPLASH PROOF CONN. ASS'Y WITH SPECIAL POLARIZATION

LOC.	SIZE	NUMERO (DWG NO)	REV.	FOGLIO (SHEET)
I	A3	C-282545	M	2 DI (OF) 2