THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2009
© COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

MATED WITH:
PASSEND ZU:
1355350

LOC	DIST
A1	-

PROJECT NO.:
A98-52183

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	CODING PIN CONTACT (2-...-1). DIM 13.3 to 13.7	02NOV1999	O.L	B.F
	B2	DATA CONVERT MEDUSA - PROE	22JUL2010	GKT	O.F





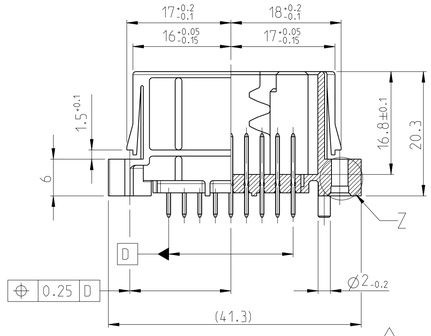

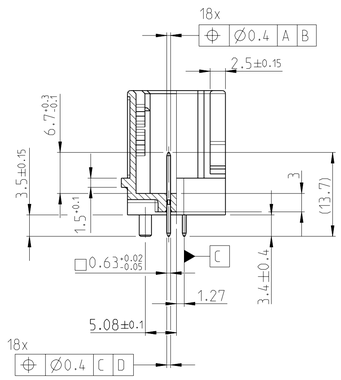



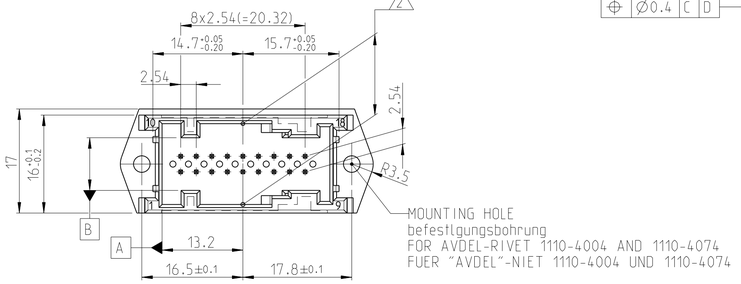

Z
5:1



CABLE DIRECTION LEFT
Kabelabgang Links

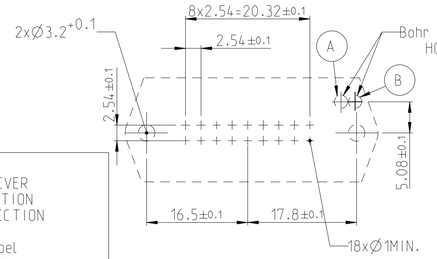

PCB LAYOUT
LeiterplattenLayout

CABLE DIRECTION RIGHT
Kabelabgang rechts



FREE RANGE FOR LEVER
IN PRELOCKED POSITION
AT AGGREGATE CONNECTION

Freiraum fuer Hebel
in Vorraststellung
am Geraeteanschluss

FREE RANGE FOR LEVER
IN ENDLOCKED POSITION
AT AGGREGATE CONNECTION

Freiraum fuer Hebel
in Endraststellung
am Geraeteanschluss

1:1

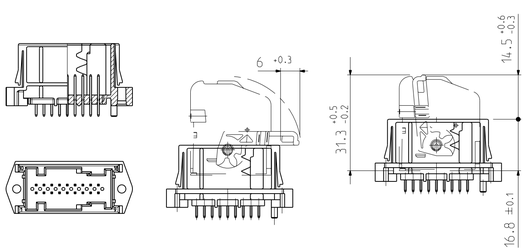

FRONT PLATE CUT-OUT
Frontplattenausschnitt
1:1





SURFACE/OBERFLAECHE

STYLE: / Ausfuehrung Sn: COAT THICKNESS 2.5 UNTIL 4 µm Sn OVER 1.3 UNTIL 2.2 µm Ni
Schichtdicke 2.5 bis 4 µm Sn ueber 1.3 bis 2.2 µm Ni

TE ORDER NO. BESTELL-NR.	REV. REV.	CODE. KOD.	POS. POS.	QTY. STK.	DESCRIPTION BENENNUNG	SURFACE/COLOR FARBE OBERFLAECHE	MATERIAL Material	SUITABLE FOR: SHIELD dazu passend: Abdeckkappe TE	USED WITH: SOCKET HOUSING DAZU GEHOEHRT: Buchsengehaeuse TE
-	-	-	-	-	-	-	-	-	-
			-	-	-	-	-		
3-1355154-1	B	B	2	18	PIN CONTACT/Stiftkontakt	TIN/Zinn	CuFe2	2-1355350-1	-
			1	1	PIN HEADER/Stiftwanne	NATURAL/Natur	PET-GF30		
2-1355154-1	B	B	2	18	PIN CONTACT/Stiftkontakt	TIN/Zinn	CuFe2	2-1355350-1	-
			1	1	PIN HEADER/Stiftwanne	NATURAL/Natur	PET-GF30		
1-1355154-1	B	A	2	18	PIN CONTACT/Stiftkontakt	TIN/Zinn	CuFe2	1-1355350-1	1355348-1
			1	1	PIN HEADER/Stiftwanne	BLACK/schwarz	PET-GF30		

CABLE DIRECTION LEFT AND RIGHT
Kabelabgang links und rechts

1-1355154-1 AS SHOWN
WIE GEZEICHNET

CODINGS
KODIERUNGEN



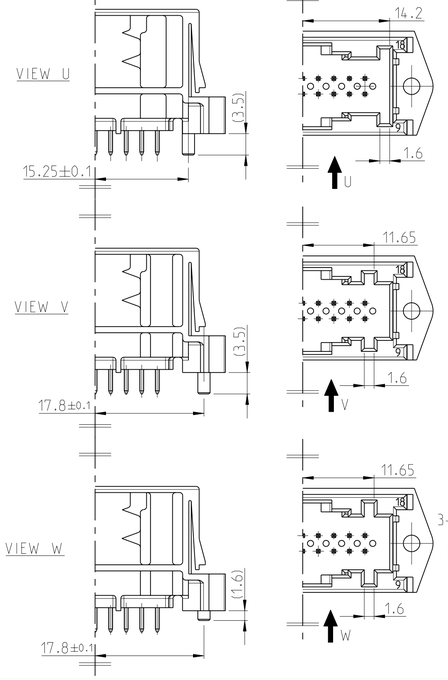

NOTES:
Bemerkungen:

1. MATERIALMARKING
Materialkennzeichnung
2. WARPAGE -0.3MM PERMITTED
Verzug -0.3mm zulaessig
3. PACKAGING: IN TRAY NO. 740966-1
Verpackung: in Produkttraeger 740966-1
4. PRODUCTSPECIFICATION: 108-18030
Produktspezifikation: 108-18030
5. PRESS OUT FORCE > 25N
SOLDERABILITY ACC. TO DIN IEC 68 Part 2-20
Ausdrueckkraft > 25N
Loetbarkeit gemaess DIN IEC 68 Teil 2-20.Alterung 3
6. CAVITY MARKING
Nestkennzeichnung
7. TE PN FOR HOUSING
TE Teile Nr. fuer Gehaeuse
8. TE PN FOR ASSY
TE Teile Nr. fuer Assembly
9. REVISION (HOUSING)
Aenderungsstand (Gehaeuse)
10. OTHER CODINGS UPON REQUEST
weitere Kodierungen auf Anfrage

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: mm
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.2
1 PLC ±0.2
2 PLC ±0.2
3 PLC ±0.2
4 PLC ±0.2
ANGLES ±2°
MATERIAL SEE TABLE siehe Tabelle
FINISH SEE TABLE siehe Tabelle

DWN O.Frank 24JUN1999
CHK B.FieberLing 24JUN1999
APVD -
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT ca. 6g

Tyco Electronics
Tyco Electronics AMP GmbH
64625 Bensheim (Germany)

NAME
MICRO QUADLOCK SYSTEM, PIN HEADER, 18POS.
Micro Quadlock System, Stiftwanne, 18pol.
-

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-1355154 | RESTRICTED TO -

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV B2

4805 (2/09)

Pro/ENGINEER DRAWING