


注記:
NOTES:
1. 適合リセプタクルハウジング: 3191-06R*
TO BE MATED WITH RECEPTACLE
HOUSING : 3191-06R*

2) ASSEMBLIES MAY CONTAIN SOLID
OR SWAGED (HOLLOW) PINS.

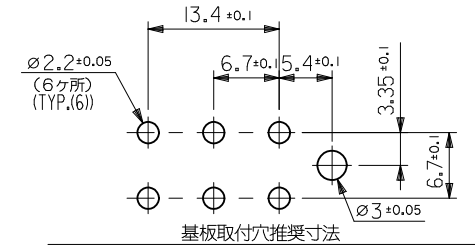

基板取付穴推奨寸法
RECOMMENDED P.C. BOARD HOLE DIMENSIONS

5219-06
(表参照)
(SEE CHART)
5218
(黄銅, ニッケル下地錫メッキ)
(BRASS, TIN OVER
NICKEL PLATING)

5219-06A	15-31-1066	NYLON66,94V-2
ENG. NO.	EDP NO.	ハウジングの材質 MATERIAL

角度 ANGLE	± 3°
30以上 OVER	±0.3
10以上 30未満 OVER UNDER	±0.25
10未満 UNDER	±0.2
一般公差 GENERAL TOLERANCES	

ADD NOTE NUMBER 2 EC NO: UCP2012-0046 DRAWN: AELHAG 2011/07/28 CHKD: JBELL 2011/08/26 APPR: FSMITH 2011/09/02 K	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		▽E=0	mm INCH	MM ONLY	2:1	METRIC	◎ □
		▽E=0	4 PLACES ± --- ± ---	DRAWN BY DATE	TITLE NEW INTER. CONN. 6POS. 6 POS. HEADER		
		▽E=0	3 PLACES ± --- ± ---	K. KOHAMA 2000/05/30			
		ANGULAR ± 3°	CHECKED BY DATE	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-5219-06A	SHEET NO. 1 OF 1	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	M. FUKUSHIMA 2000/05/30				
			APPROVED BY DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			