


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	AA	REVISED PER ECO-15-010090	16JUL2015	AP DG

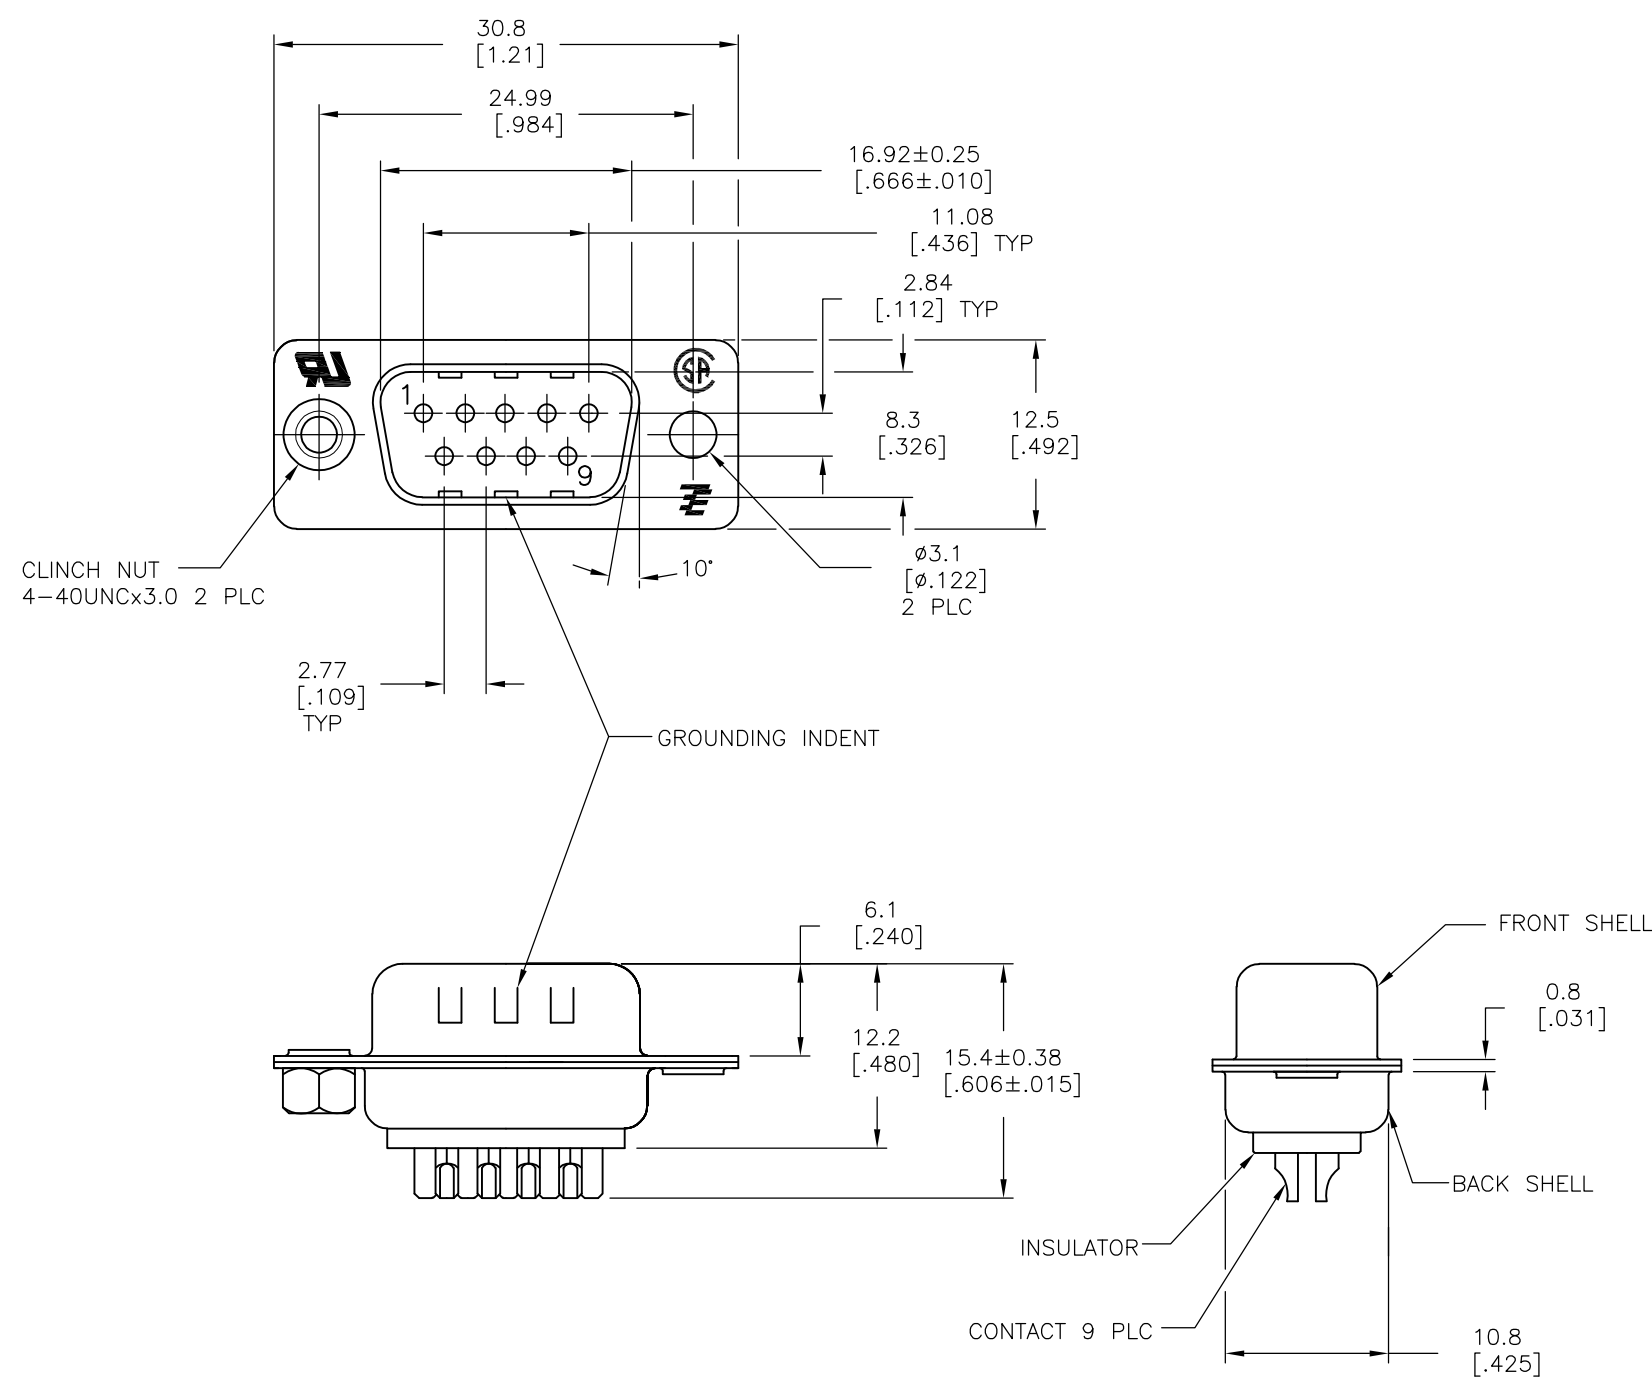

- 1 MATERIAL:
 FRONT INSULATOR: PBT, 30 %GF, UL94V-0, BLACK COLOR
 BACK INSULATOR: PBT, 30 %GF, UL94V-0, BLACK COLOR
 CONTACT: BRASS
 FRONT & BACK SHELL: STEEL
 CLINCH NUTS: BRASS
- 2 FINISH:
 CONTACT: GOLD PLATING 0.00002[.0000008] MIN ON CONTACT AREA 0.00229 [.000090] MIN TIN-LEAD PLATING ALL OVER 0.00127[.000050] MIN NICKEL
- 3 CONTACT: GOLD PLATING 0.00076[.000030] MIN ON CONTACT AREA 0.00229 [.000090] MIN TIN-LEAD PLATING ALL OVER 0.00127[.000050] MIN NICKEL
- 4 SHELL: BRIGHT TIN 0.00241[.000095] MIN FULL SHELL
- 5 SHELL: BLUE ZINC: 0.00508[.000200] - 0.00762[.000300] OVER ENTIRE SHELL
- 6 CONTACT: GOLD PLATING 0.00002[.0000008] MIN ON CONTACT AREA 0.00229 [.000090] MIN HOT DIPPED TIN-COPPER PLATING ALL OVER 0.00127[.000050] MIN NICKEL
- 7 CLINCH NUTS: NICKEL PLATING .00305-.00508[.000120-.000200]
- 8 SPECIFICATION
 ELECTRICAL CHARACTERISTICS: CURRENT RATING: 3 AMPERES
 DIELECTRIC WITHSTANDING VOLTAGE: AC 1000V r.m.s
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM AT DC 500V
 CONTACT RESISTANCE: 10 MILLIOHMS MAXIMUM.
- 9 ROHS 2002/95/EC/COMPLIANT
- 10 PLUG ASSEMBLY MATES WITH ANY 9 POSITION RECEPTACLE IN AMPLIMITE SERIES.
- 11 SOLDER CUP WILL ACCOMODATE 20 AWG MAX WIRE
- 12 CONTACT: GOLD PLATING 0.00076[.000030] MIN ON CONTACT AREA 0.00229[.000090] MIN HOT DIPPED TIN-COPPER ALL OVER 0.00127[.000050] MIN NICKEL PLATING

REV	DESCRIPTION	DATE	BY	CHKD	APVD	REV	DESCRIPTION	DATE	BY	CHKD	APVD	REV	DESCRIPTION	DATE	BY	CHKD	APVD	
9	OBSOLETE	STANDARD	NO	NO	6	4	5-747904-4											
9	OBSOLETE	STANDARD	YES	YES	6	4	5-747904-8											
9	OBSOLETE	STANDARD	NO	YES	12	4	5-747904-5											
9	OBSOLETE	STANDARD	NO	YES	6	4	5-747904-2											
9	OBSOLETE	STANDARD	NO	YES	6	4	747904-9											
9	OBSOLETE	STANDARD	YES	YES	2	4	747904-8											
9	OBSOLETE	STANDARD	NO	YES	3	4	747904-5											
9	OBSOLETE	STANDARD	NO	NO	2	5	747904-4											
9	OBSOLETE	STANDARD	NO	YES	2	4	747904-2											
	PACKAGING TYPE	7	CLINCH NUTS	GROUNDING INDENTS	CONTACTS	SHELLS	PART NO.											

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN M.BINNER 03MAR03	 TE Connectivity PLUG ASSY, SOLDER CUP, SIZE 1, 9 POSN, HD-20, AMPLIMITE			
0 PLC ± -	1 PLC ± 0.25	CHK R.BENDORF 05MAR03				
2 PLC ± 0.13	3 PLC ± 0.05	APVD R.BENDORF 05MAR03				
4 PLC ± -	ANGLES ± 4°	PRODUCT SPEC				
MATERIAL 1	FINISH SEE TABLE	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		WEIGHT -	A3	00779	C-747904	-
CUSTOMER DRAWING			SCALE 2:1	SHEET 1 OF 1	REV AA	