



PCB LAYOUT

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
5/06/06	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
1/06/07	B	ADDED DIM. 0.787, 0.541 AND 0.327	T.B.	B.S.	
1/13/07	C	CHANGED TOLERANCE FOR DIM. 0.787 IN PCB LAYOUT	T.B.	B.S.	

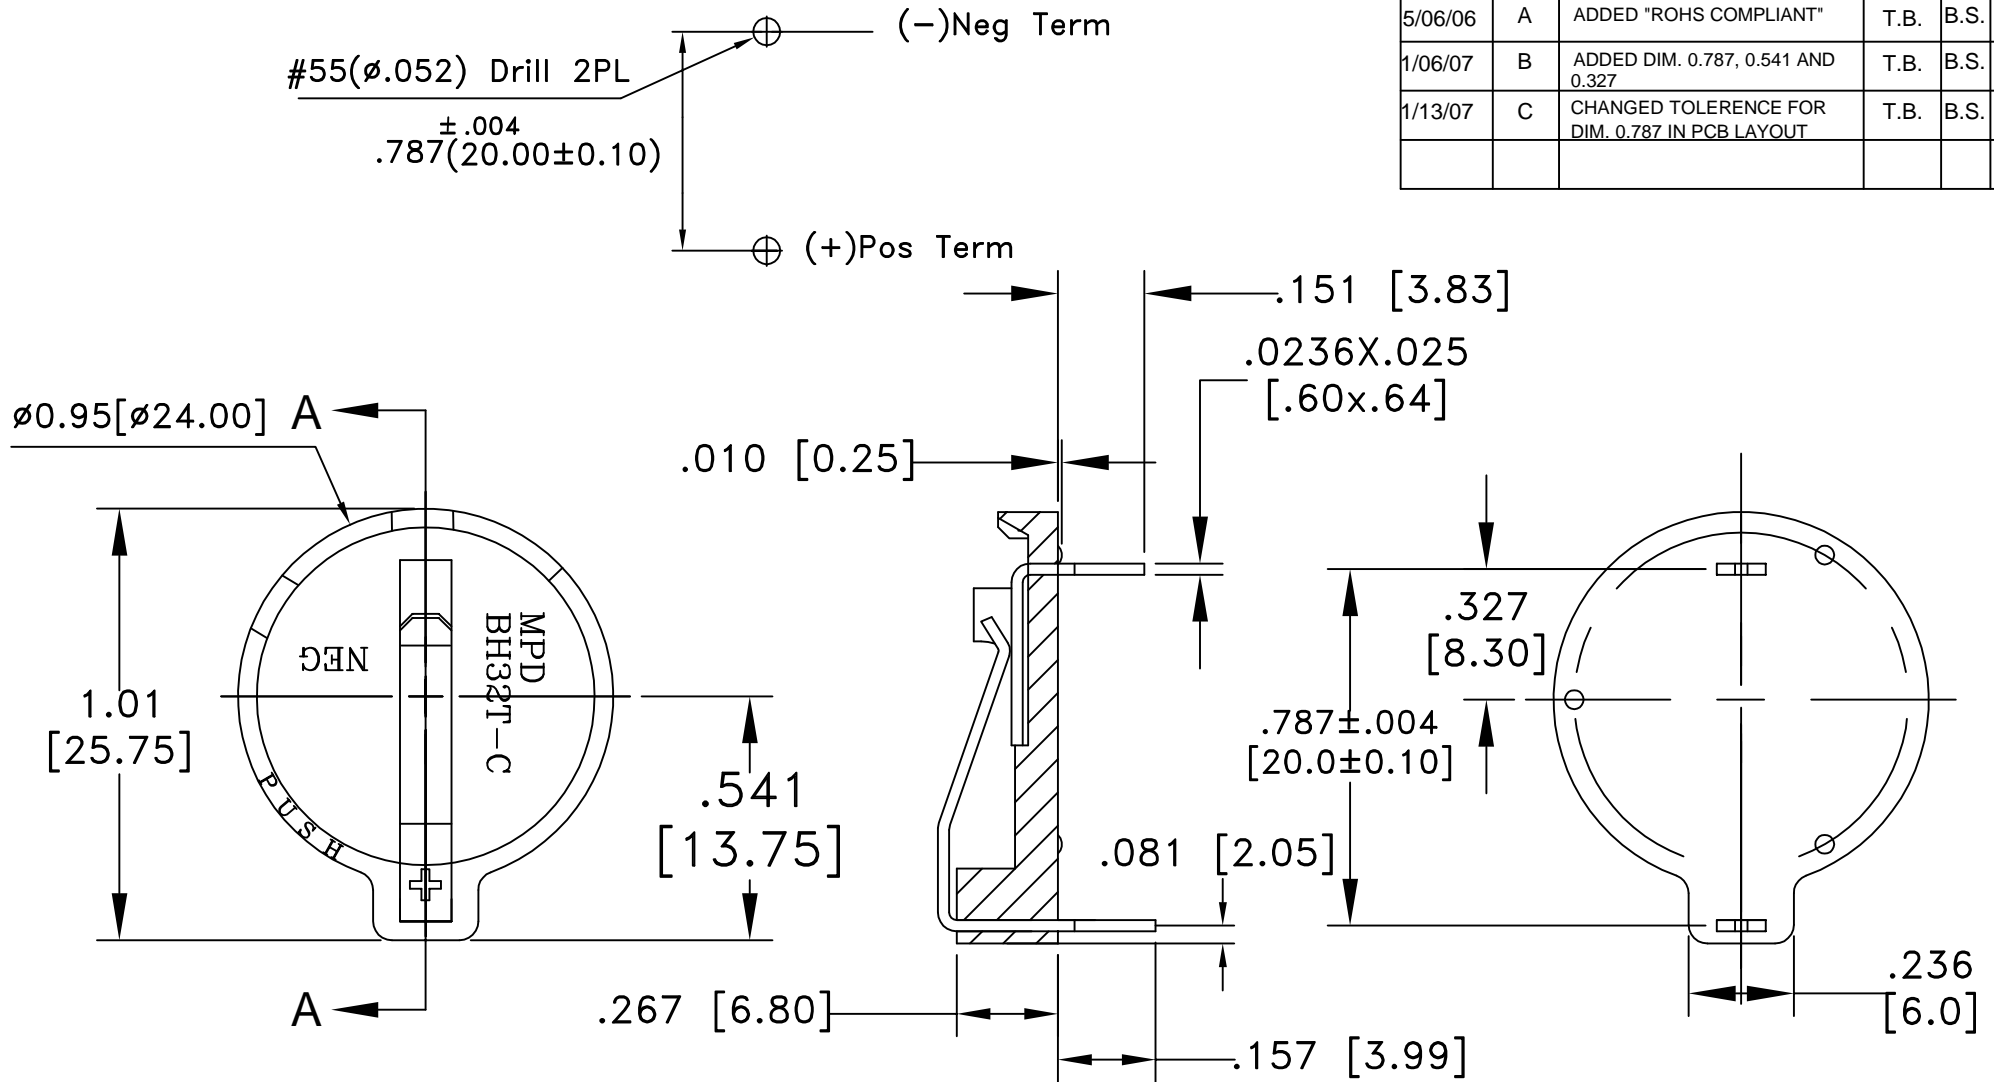

SPECIFICATIONS

- *Holder material- Nylon 66, 33% Glass Filled
- *Flammability rating-UL94-HB, UL file no. E41938
- *Contacts :
 Positive: 0.0236" Thick PHOS-BRONZE, Nickel Plated
 Negative: spring tempered Stainless Steel, Nickel Plated
- *Temperature Range: -40°C to +235°C
- ROHS COMPLIANT

Tolerance (Except as noted)	 Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ± .8 (.030)	Title	Approved By T.B.	
Angular ± 3°	Date	Title	
	1/13/07	CR2032 OR BR2032 BATTERY HOLDER	
	Drawing Number		
		BH32T-C-HITE	