
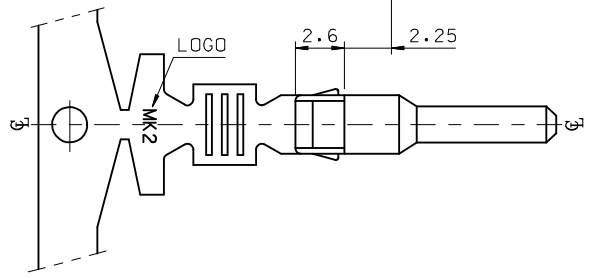


- NOTES.
1. MATERIAL : ⓄBRASS, PRE-TIN PLATED
 2. FINISH : 0.8~1.8μm,Tin(Sn) plating overall
0.3~0.8μm.Copper(Cu) plating
 3. PRODUCT SPECIFICATION : PS-35150-001, PS-35180-002
PS-35180-003, PS-35182-003, PS-35524-001
 4. CRIMPING SPECIFICAITON : CS-35745-001
 5. RECOMMENDED LENGTH OF WIRE STRIP IS 4.0~4.8mm
 6. APPLICABLE WIRE SIZE : AWG #20+#20
AWG #20+#18
AWG #18+#18

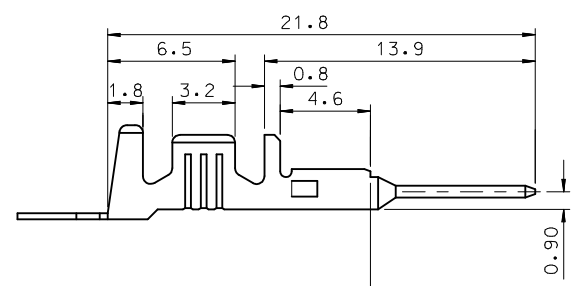

REVISED EC NO: KOR2009-0151 DRWN: JHPARK01 2009/05/18 CHKD: WYANG 2009/06/18 APPR: YUNSIKKIM 2009/07/01	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY JS.KANG	DATE 1998/01/19	TITLE .070 MALE TERMINAL-A (LARGE)			
				4 PLACES	± ---	± ---	CHECKED BY BK. CHOI	DATE 1998/01/19	MOLEX INCORPORATED		
				3 PLACES	± ---	± ---	APPROVED BY CW. LEE	DATE 1998/01/19	MATERIAL NO. 357450310	DOCUMENT NO. SD-35745-002	SHEET NO. 1 OF 01
		2 PLACES	± 0.2	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						
		1 PLACE	± 0.3	± ---	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
		ANGULAR ± 1 °									