Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

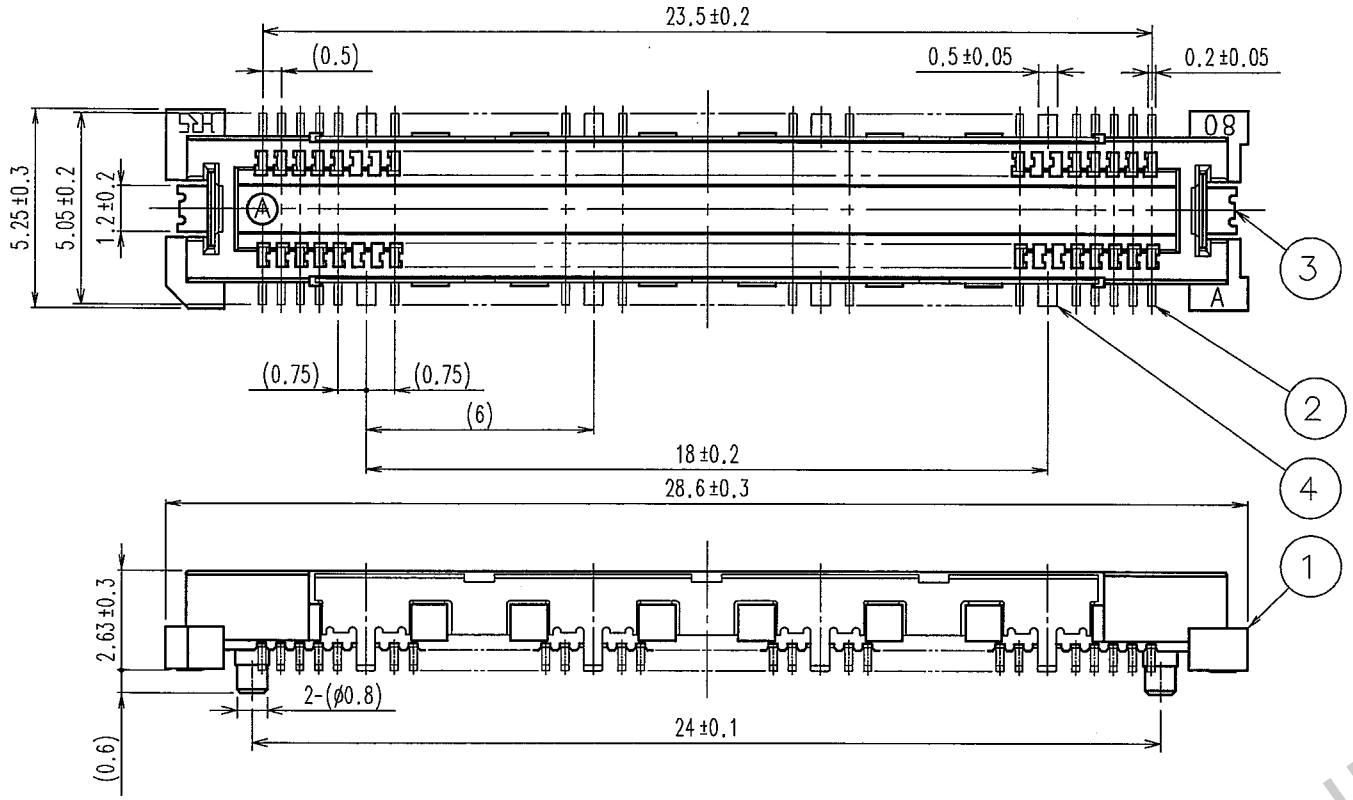

SIGNAL PORTION CROSS SECTION (10:1)

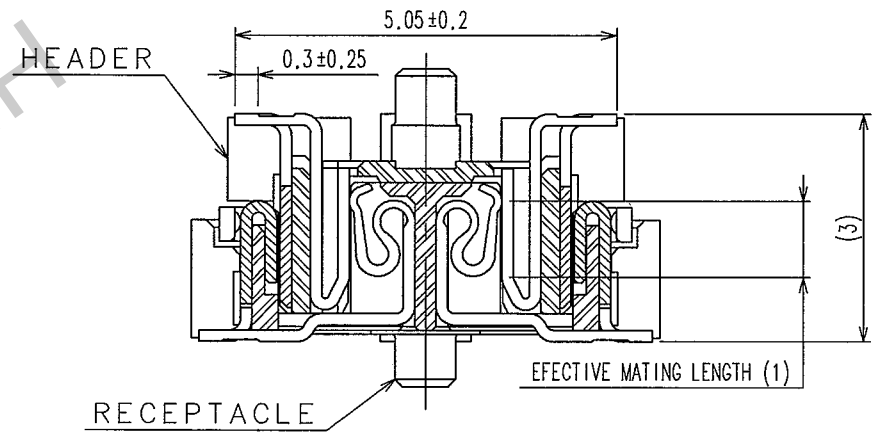

GROUND PORTION CROSS SECTION (10:1)

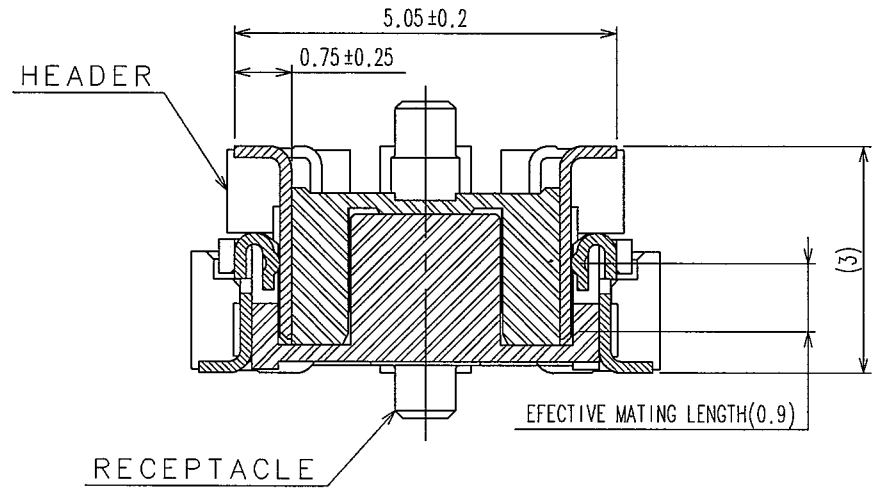

RECOMMENDED LAND PATTERN DIMENSION OF PCB

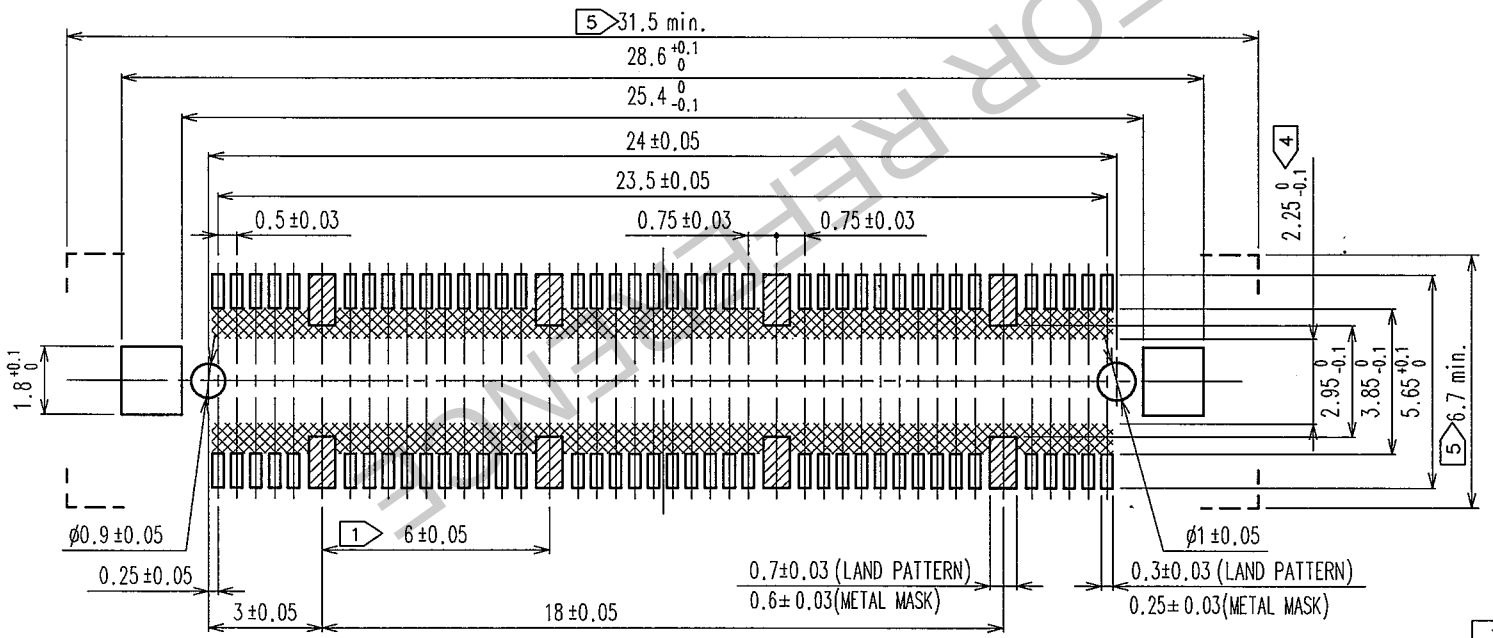

NOTES
1. 8 HATCHED ▨ PARTS:GROUND CIRUIT.
2. SMT LEAD-COPLANARITY:0.1 MAX.
3. THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
4. MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED ▩ AREA.)
5. DO NOT MOUNT OTHER DEVICES INSIDE ⊏ ⊐ AREA ,OR MATING PAIR CANNOT BE MATED.
6. DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE.

NO.	MATERIAL	FINISH, REMARKS
3,4	PHOSPHOR BRONZE	TIN PLATING
1	LCP	BEIGE UL94V-0

NO.	MATERIAL	FINISH, REMARKS
2	COPPER ALLOY	CONTACT AREA:GOLD 0.1μmmin.
		MOUNTING AREA:GOLD FLASH
		UNDER PLATING:NICKEL 1μmmin.

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	T.NODA '05.09.22	T.Noda '05.09.22	H.Ogawa '05.09.26	H.Okawa '05.09.26	

SCALE	DRAWING NO.	PART NO.
5 : 1	EDC3-152615-25	FX11A-80P/8-SV0.5(71)
UNITS mm	HRS HIROSE ELECTRIC CO.,LTD.	CODE NO. CL573-0603-7-71 1/1

TO

FORM NO.229

HRS DRAWING FOR REFERENCE