

Wakefield-Vette's 900 Series Heat Sinks for Chipset can match up to devices from Intel, Broadcom, Xilinx, TI, Motorola, ATI, AMD, Nvidia, Vishay, Powerex, Infineon, Microsemi, and many more.

These heat sinks are designed for air flow applications in the Telecom, Data Center, Networking, Cloud Computing, and many more Industries.

Material: AL 6063




Finish: Black Anodize



FORCED CONVECTION							FORCED CONVECTION						
SERIES	Height	CHIP SIZE	NATURAL CONVECTION	200 LFM	400 LFM	600 LFM	SERIES	HEIGHT	CHIP SIZE	NATURAL CONVECTION	200 LFM	400 LFM	600 LFM
901	12	19mm	14.77 C/W	6.63 C/W	5.09 C/W	4.38 C/W	906	12	31mm	12.02 C/W	3.37 C/W	2.25 C/W	1.87 C/W
	15	19mm	14 C/W	6.12 C/W	4.63 C/W	3.95 C/W		15	31mm	11.43 C/W	3.13 C/W	2.02 C/W	1.66 C/W
	18	19mm	13.23 C/W	5.67 C/W	4.17 C/W	3.58 C/W		18	31mm	10.85 C/W	2.85 C/W	1.79 C/W	1.45 C/W
	21	19mm	12.46 C/W	5.28 C/W	3.87 C/W	3.24 C/W		21	31mm	10.27 C/W	2.63 C/W	1.63 C/W	1.31 C/W
	23	19mm	11.98 C/W	4.89 C/W	3.58 C/W	3.06 C/W		23	31mm	9.88 C/W	2.44 C/W	1.5 C/W	1.19 C/W
	28	19mm	11.5 C/W	4.38 C/W	3.26 C/W	2.80 C/W		28	31mm	8.93 C/W	2.21 C/W	1.36 C/W	1.05 C/W
902	33	19mm	9.57 C/W	4.04 C/W	2.98 C/W	2.62 C/W	33	31mm	7.98 C/W	2.02 C/W	1.19 C/W	.93 C/W	
	12	21mm	14.31 C/W	5.81 C/W	3.86 C/W	3.16 C/W	907	12	33mm	11.56 C/W	3.23 C/W	2.09 C/W	1.73 C/W
	15	21mm	13.57 C/W	5.3 C/W	3.5 C/W	2.89 C/W		15	33mm	11 C/W	2.97 C/W	1.88 C/W	1.54 C/W
	18	21mm	12.83 C/W	4.95 C/W	3.35 C/W	2.66 C/W		18	33mm	10.45 C/W	2.69 C/W	1.7 C/W	1.37 C/W
	21	21mm	12.09 C/W	4.61 C/W	3.11 C/W	2.47 C/W		21	33mm	9.9 C/W	2.5 C/W	1.52 C/W	1.22 C/W
	23	21mm	11.63 C/W	4.32 C/W	2.91 C/W	2.32 C/W		23	33mm	9.54 C/W	2.3 C/W	1.37 C/W	1.08 C/W
28	21mm	10.47 C/W	3.89 C/W	2.61 C/W	2.09 C/W	28		33mm	8.62 C/W	2.08 C/W	1.23 C/W	.98 C/W	
903	33	21mm	9.3 C/W	3.57 C/W	2.37 C/W	1.95 C/W	33	33mm	7.71 C/W	1.89 C/W	1.08 C/W	.86 C/W	
	12	23mm	13.85 C/W	4.75 C/W	3.31 C/W	2.79 C/W	908	12	35mm	11.1 C/W	3.07 C/W	2.07 C/W	1.64 C/W
	15	23mm	13.14 C/W	4.38 C/W	3.05 C/W	2.53 C/W		15	35mm	10.58 C/W	2.79 C/W	1.87 C/W	1.46 C/W
	18	23mm	12.44 C/W	4.07 C/W	2.81 C/W	2.32 C/W		18	35mm	10.06 C/W	2.54 C/W	1.69 C/W	1.27 C/W
	21	23mm	11.73 C/W	3.84 C/W	2.57 C/W	2.11 C/W		21	35mm	9.53 C/W	2.35 C/W	1.52 C/W	1.15 C/W
	23	23mm	11.28 C/W	3.59 C/W	2.4 C/W	1.97 C/W		23	35mm	8.75 C/W	2.13 C/W	1.35 C/W	1.01 C/W
28	23mm	10.16 C/W	3.22 C/W	2.17 C/W	1.8 C/W	28		35mm	7.93 C/W	1.94 C/W	1.19 C/W	.86 C/W	
904	33	23mm	9.04 C/W	2.93 C/W	1.95 C/W	1.64 C/W	33	35mm	7.11 C/W	1.69 C/W	1.02 C/W	.72 C/W	
	12	27mm	12.93 C/W	4.34 C/W	3 C/W	2.53 C/W	909	12	37.5mm	10.52 C/W	3.11 C/W	2.01 C/W	1.61 C/W
	15	27mm	12.29 C/W	4.05 C/W	2.76 C/W	2.29 C/W		15	37.5mm	10.04 C/W	2.82 C/W	1.79 C/W	1.41 C/W
	18	27mm	11.64 C/W	3.73 C/W	2.5 C/W	2.07 C/W		18	37.5mm	9.56 C/W	2.59 C/W	1.59 C/W	1.22 C/W
	21	27mm	11 C/W	3.43 C/W	2.31 C/W	1.9 C/W		21	37.5mm	9.08 C/W	2.38 C/W	1.41 C/W	1.06 C/W
	23	27mm	10.58 C/W	3.21 C/W	2.11 C/W	1.71 C/W		23	37.5mm	8.75 C/W	2.15 C/W	1.24 C/W	.94 C/W
28	27mm	9.54 C/W	2.89 C/W	1.84 C/W	1.51 C/W	28		37.5mm	7.93 C/W	1.88 C/W	1.08 C/W	.8 C/W	
905	33	27mm	8.51 C/W	2.62 C/W	1.66 C/W	1.35 C/W	33	37.5mm	7.11 C/W	1.64 C/W	.93 C/W	.68 C/W	
	12	29mm	12.47 C/W	4.09 C/W	2.74 C/W	2.25 C/W	910	12	40mm	9.95 C/W	3.09 C/W	1.93 C/W	1.56 C/W
	15	29mm	11.86 C/W	3.81 C/W	2.52 C/W	2.02 C/W		15	40mm	9.51 C/W	2.77 C/W	1.73 C/W	1.37 C/W
	18	29mm	11.25 C/W	3.56 C/W	2.31 C/W	1.84 C/W		18	40mm	9.06 C/W	2.74 C/W	1.52 C/W	1.17 C/W
	21	29mm	10.63 C/W	3.3 C/W	2.12 C/W	1.65 C/W		21	40mm	8.62 C/W	2.22 C/W	1.35 C/W	.99 C/W
	23	29mm	10.23 C/W	3.06 C/W	1.91 C/W	1.49 C/W		23	40mm	8.3 C/W	2.01 C/W	1.19 C/W	.87 C/W
28	29mm	9.24 C/W	2.72 C/W	1.69 C/W	1.33 C/W	28		40mm	7.55 C/W	1.8 C/W	1.04 C/W	.75 C/W	
33	29mm	8.24 C/W	2.47 C/W	1.49 C/W	1.18 C/W	33	40mm	6.78 C/W	1.61 C/W	.88 C/W	.64 C/W		

Part Numbering System

Series	Chip Size	Construction	Height	Spring Type	Finish	Interface
901-	19-	1-	12-	1-	B-	1
XXX	XX	X	XX	X	X	X
901	19	1= Elliptical Fin	12 = 11.6	1 = .9-2.1 CST	B = BLK ANO	0 = None
902	21	2= Pin Fin	15 = 14.6	2 = 2.2-3.4 CST		1 = T725
903	23		18 = 17.6			
904	27		21 = 20.6			
905	29		23 = 22.6			
906	31		28 = 27.6			
907	33		33 = 32.6			
908	35					
909	37.5					
910	40					

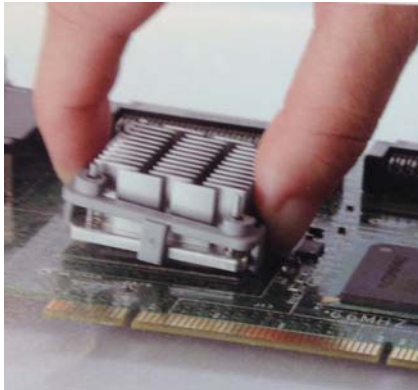


ASSEMBLY INSTRUCTION:

STEP 1: Center heat Sink onto BGA. Tilt and hook one side of the clip under the BGA chip.

STEP 2: Press down the other side of clip to snap it onto the BGA chip.

STEP 3: Make sure the stop pin is not on top of the chip set. Installation is now complete.

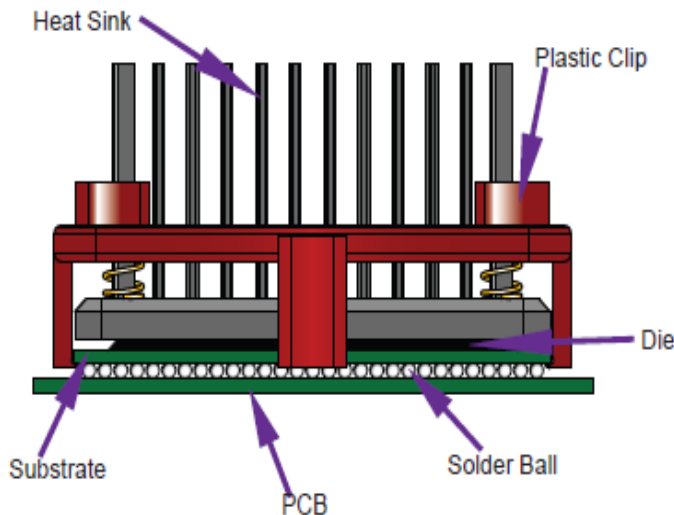

Wakefield-Vette's heat sink assembles onto chip set using the space that is between the PCB and the substrate of the solder balls. The solder balls provide a minimal gap of .5mm to .7mm. Attachment feature is below a .4mm thickness. The clipping system will not interfere or damage chip. Contact area is the edge of chip.

SHOCK TEST SPECIFICATION :

Wave Form : Half sine wave
 Acceleration : 50 g
 Duration Time : 11 ms
 No. of Shock : Each axis 3 times
 Shock Direction : $\pm X, \pm Y, \pm Z$ axis
 Reliability & Communication
 Testing Instruments

Random Vibration Test

Frequency : 5 Hz to 500 Hz
 Acceleration : 3.13 grms
 P.S.D : 0.01 g²/HZ (5 Hz)
 0.02 g²/HZ (20 Hz to 500 Hz)
 Test Axis : X, Y, Z axis
 Test Time : 10 mins (Each axis)
 Total Test Time : 30 mins