

## General Description

The MAX20303 evaluation kit (EV kit) is a fully assembled and tested circuit for evaluating the MAX20303 wearable charge-management solution with I<sup>2</sup>C compatibility for feature-rich, low-power wearable applications. The device includes a linear battery charger, smart power selector, two ultra-low quiescent current buck regulators, a buck-boost regulator, a boost regulator, a charge pump, two low-dropout (LDO) linear regulators, three LED current sinks, five GPIO pins, and an LRA/ERM compatible haptic driver with internal pattern storage.

Refer to the MAX20303 IC data sheet for detailed information regarding the operation and features of the device.

## Features

- RoHS Compliant
- Proven PCB Layout
- Fully Assembled and Tested
- I<sup>2</sup>C Serial Interface

## Detailed Description of Hardware

The MAX20303 EV kit evaluates the MAX20303 wearable charge-management solution. The default settings of the EV kit differ from other versions of the IC to allow for flexible evaluation. Refer to Tables 1 through Table 3 for descriptions of the default settings and the readback values of the direct registers and AP registers on reset.

[Ordering Information](#) appears at end of data sheet.

**Table 1. Register Bit Default Values**

REGISTER BITS	DEFAULT VALUE
PFN2PUD_CFG	Hi-Z
PFN1PUD_CFG	Hi-Z
WriteProtect	Disabled
ILimBlank	Disabled
ILimCntl	500mA
MtChgTmr	60min
FChgTmr	600min
PChgTmr	240min
TShdnTmo	10s
ChgAutoRe	Auto-Restart
VPChg	3.15V
IPChg	5% IFCHG
ChgDone	30% IFCHG
ChgEn	Enabled
ChgAutoStp	Enabled
BatReChg	50mV
BatReg	4.20V
ColdLim	1129.41mV
HotLim	35.29mV
BstISet	200mA
BstIAdptEn	Enabled
BstFastStrt	100ms
BstFetScale	Disabled
BstVSet	12V
Buck1FetScale	Disabled
Buck2FetScale	Disabled
BstSeq	BoostEn After 100%
BstEn	Disabled
Buck1VSet[5:0]	1.2V
Buck1IZCSet	20mA
Buck2VSet	1.8V
Buck2IZCSet	30mA
Buck2ISet	150mA
Buck1ISet	150mA
BootDly	120ms
Buck2SftStrt	50ms Soft-Start
Buck1SftStrt	50ms Soft-Start

REGISTER BITS	DEFAULT VALUE
Buck2En	Disabled
Buck1En	Disabled
LDO1Md	LDO
LDO1En	Disabled
LDO2Md	LDO
LDO2En	Disabled
PassDiscEna	Enabled
LDO2VSet	3.0V
StayOn	Enabled
SFOUVSet	3.3V
LDO1VSet	1V
SysMinVlt	3.6V
SFOUVEn	CHGIN
CPVSet	6.6V
CPEn	Disabled
CPSeq	CPEn After 100%
PwrRstCfg	0b0110
Buck2Seq	Buck2En After 100%
Buck1Seq	Buck1En After 100%
BBstEn	Disabled
LDO2Seq	LDO2En After 100%
LDO1Seq	LDO1En After 100%
ThmEn	Enabled
BBstVset	4V
BBstISet	100mA
BatOcThr	1000mA
BBstRipRed	Lower Ripple
BBstInd	4.7µH
BBstSeq	BBstEn After 100%
EmfEn	Enabled
HptSel	LRA
AlcMod	Enabled
HptSysUVLO	3V
HptDrvTmo	Disabled
ILimMax	1000mA
TCHGIN_SHDN	120°C

**Table 2. I<sup>2</sup>C Direct Register Default Values**

REGISTER	NAME	DEFAULT VALUE
0x00	HardwareID	0x02
0x01	FirmwareID	0x02
0x0B	SystemError	0x00
0x0C	IntMask0	0x00
0x0D	IntMask1	0x00
0x0E	IntMask2	0x40
0x0F	APDataOut0	0x00
0x10	APDataOut1	0x00
0x11	APDataOut2	0x00
0x12	APDataOut3	0x00
0x13	APDataOut4	0x00
0x14	APDataOut5	0x00
0x15	APDataOut6	0x00
0x17	APCmdOut	0x00
0x18	APResponse	0x00
0x19	APDataIn0	0x00
0x1A	APDataIn1	0x00
0x1B	APDataIn2	0x00

REGISTER	NAME	DEFAULT VALUE
0x1C	APDataIn3	0x00
0x1D	APDataIn4	0x00
0x1E	APDataIn5	0x00
0x20	LDODirect	0x00
0x21	MPCDirectWrite	0x00
0x28	HptRAMAddr	0x00
0x29	HptRAMDataH	0x4A
0x2A	HptRAMDataM	0x74
0x2B	HptRAMDataL	0x63
0x2C	LEDStepDirect	0x00
0x2D	LED0Direct	0x00
0x2E	LED1Direct	0x00
0x2F	LED2Direct	0x00
0x30	HptDirect0	0x04
0x31	HptDirect1	0x00
0x32	HptRTI2Camp	0x00
0x33	HptPatRAMAddr	0x00

See Table 3 through Table 7 for pin descriptions of the three connectors J1-J5.

**Table 3. Read Opcode Default Values**

OPCODE	REGISTER	DEFAULT VALUE
GPIO_Config_Read (0x02)	APDataIn0	0x00
	APDataIn1	0x00
	APDataIn2	0x00
	APDataIn3	0x00
	APDataIn4	0x00
GPIO_Control_Read (0x04)	APDataIn0	0x00
MPC_Config_Read (0x07)	APDataIn0	0x00
	APDataIn1	0x00
	APDataIn2	0x00
	APDataIn3	0x00
	APDataIn4	0x00
InputCurrent_Config_Read (0x11)	APDataIn0	0x06
ThermalShutdown_Config_Read (0x12)	APDataIn0	0x03

OPCODE	REGISTER	DEFAULT VALUE
Charger_Config_Read (0x15)	APDataIn0	0x3F
	APDataIn1	0x73
	APDataIn2	0xC3
	APDataIn3	0x00
ChargerThermalLimits_Config_Read (0x17)	APDataIn0	0xA0
	APDataIn1	0xA0
	APDataIn2	0x05
ChargerThermalReg_ConfigRead (0x19)	APDataIn0	0x00
	APDataIn1	0x00
	APDataIn2	0x1F
	APDataIn3	0x00
	APDataIn4	0x00
Charger_Control_Read (0x1B)	APDataIn0	0x03

**Table 3. Read Opcode Default Values (continued)**

OPCODE	REGISTER	DEFAULT VALUE
Charger_JEITAHyst_ControlRead (0x1D)	APDataIn0	0x06
Bst_Config_Read (0x31)	APDataIn0	0x00
	APDataIn1	0x04
	APDataIn2	0x04
	APDataIn3	0x1C
	APDataIn4	0x07
Buck1_Config_Read (0x36)	APDataIn0	0x04
	APDataIn1	0x90
	APDataIn2	0x16
	APDataIn3	0x00
	APDataIn4	0x07
Buck2_Config_Read (0x3B)	APDataIn0	0x00
	APDataIn1	0x80
	APDataIn2	0x00
	APDataIn3	0x00
	APDataIn4	0x07
LDO1_Config_Read (0x41)	APDataIn0	0x00
	APDataIn1	0x14
	APDataIn2	0x07
LDO2_Config_Read (0x43)	APDataIn0	0x00
	APDataIn1	0x15
	APDataIn2	0x07
ChargePump_Config_Read (0x47)	APDataIn0	0x00
	APDataIn1	0x00
	APDataIn2	0x07
SFOUT_Config_Read (0x49)	APDataIn0	0x05
MONMux_Config_Read (0x51)	APDataIn0	0x00

OPCODE	REGISTER	DEFAULT VALUE
BBst_Config_Read (0x71)	APDataIn0	0x00
	APDataIn1	0x02
	APDataIn2	0x0F
	APDataIn3	0x50
	APDataIn4	0x07
Hpt_Config_Read0 (0xA1)	APDataIn0	0x0E
	APDataIn1	0xD0
	APDataIn2	0x17
	APDataIn3	0x03
	APDataIn4	0x05
	APDataIn5	0x01
Hpt_Config_Read1 (0xA3)	APDataIn0	0x01
	APDataIn1	0x00
	APDataIn2	0x02
	APDataIn3	0x8B
	APDataIn4	0x7F
	APDataIn5	0x04
Hpt_Config_Read2 (0xA5)	APDataIn0	0x4C
	APDataIn1	0x32
	APDataIn2	0xFF
	APDataIn3	0x04
	APDataIn4	0x24
	APDataIn5	0x06
Hpt_SYS_Threshold_Config_Read (0xA7)	APDataIn0	0x8B
Hpt_Lock_Config_Read (0xA9)	APDataIn0	0x00
Hpt_EMF_Threshold_Config_Read (0xAB)	APDataIn0	0x19

**Table 4. Connector J1**

PIN	SIGNAL	DESCRIPTION
1	GND	Ground
2	CHGIN	+28V/-5.5V Protected Charger Input
3	SYS	System Load Connection
4	BAT	Battery Connection
5	THM	Battery Thermistor Measurement Connection
6	TPU	Battery Temperature Thermistor Measurement Pullup. Do not exceed 1mA load on TPU.
7	SET	External Resistor For Battery Charge Current Level Setting
8	LED0	Current Sink Output 0
9	LED1	Current Sink Output 1
10	LED2	Current Sink Output 2
11	BSTOUT	Boost Regulator Output
12	GND	Ground

**Table 5. Connector J2**

PIN	SIGNAL	DESCRIPTION
1	GND	Ground
2	MON	Monitor Multiplexer Output
3	$\overline{\text{ALRT}}$	Fuel Gauge Alert Output
4	$\overline{\text{INT}}$	Interrupt Open-Drain Output
5	$\overline{\text{RST}}$	Reset Output. Active-Low, Open-Drain Output
6	SDA	I <sup>2</sup> C Serial Data Input/Open-Drain Output
7	SCL	I <sup>2</sup> C Serial Clock Input
8	MPC1	Multipurpose Control I/O 1
9	MPC0	Multipurpose Control I/O 0
10	PFN2	Configurable Power Mode Control Pin ( $\overline{\text{KOUT}}$ )
11	PFN1	Configurable Power Mode Control PIN ( $\overline{\text{KIN}}$ )
12	GND	Ground

**Table 6. Connector J3**

PIN	SIGNAL	DESCRIPTION
1	CELL	Fuel Gauge Voltage
2	N.C.	Not Connected
3	CPOUT	Charge Pump Output
4	SFOUT	Safe Out LDO
5	BK2OUT	Buck2 Regulator Output
6	BK1OUT	Buck1 Regulator Output
7	N.C.	Not Connected
8	BBOUT	Buck-Boost Regulator Output

**Table 7. Connector J4**

PIN	MAX20303	DESCRIPTION
1	DRP	ERM/LRA Haptic Driver Positive Output
2	DRN	ERM/LRA Haptic Driver Negative Output
3	L1IN	LDO1 Input
4	L1OUT	LDO1 Output
5	L2IN	LDO2 Input
6	L2OUT	LDO2 Output
7	VDIG	Internal Reference Supply
8	CAP	Internal Reference Supply

**Table 8. Connector J5**

PIN	MAX20303	DESCRIPTION
1	SYS	System Load Connection
2	N.C.	Not Connected
3	N.C.	Not Connected
4	N.C.	Not Connected
5	N.C.	Not Connected
6	MPC4	Multipurpose Configuration I/O 4
7	MPC3	Multipurpose Configuration I/O 3
8	MPC2	Multipurpose Configuration I/O 2

## Component Suppliers


SUPPLIER	WEBSITE
Murata Americas	<a href="http://www.murata.com/en-us">www.murata.com/en-us</a>

**Note:** Indicate that you are using the MAX20303 when contacting these component suppliers.

**MAX20303 EV Kit Bill of Materials**



TITLE: Bill of Materials								
DATE: 03/23/2017								
DESIGN: max20303_evkit_a								
NOTE: DNI--> DO NOT INSTALL(PACKOUT) ; DNP--> DO NOT PROCURE								
ITEM	REF_DES	QTY	MFG PART #	MANUFACTURER	VALUE	DESCRIPTION	COMMENTS	
1	C1	1	C1608X7R1V105M080AC	TDK	1UF	CAPACITOR; SMT (0603); CERAMIC CHIP; 1UF; 35V; TOL=20%; TG=-55 DEGC TO +125 DEGC; TC=X7R		
2	C2	1	C0402X5R6R3-225MNP; C0402C225M9PAC;GRM155R60J225ME; JMK105BJ225MV	VENKEL/KEMET/MURATA/TAIYO YUDEN	2.2UF	CAPACITOR; SMT; 0402; CERAMIC; 2.2uF; 6.3V; 20%; X5R; -55degC to + 85degC; 0 +/-15% degC MAX.		
3	C3, C5, C6, C10	4	C1005X5R0J475K050BC	TDK	4.7UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 4.7UF; 6.3V; TOL=10%; TG=-55 DEGC TO +85 DEGC; TC=X5R		
4	C4	1	GRM155R60J106ME44; GRM155R60J106ME47; C1005X5R0J106M050BC; CL05A106MQ5NUN; C0402C106M9PAC	MURATA; TDK; SAMSUNG ELECTRONICS; KEMET	10UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 10UF; 6.3V; TOL=20%; TG=-55 DEGC TO +85 DEGC; TC=X5R		
5	C7	1	C0402C273K4RAC	KEMET	0.027UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 0.027UF; 16V; TOL=10%; MODEL=; TG=-55 DEGC TO +125 DEGC; TC=X7R		
6	C8, C15	2	C1005X5R1A105M050	TDK	1UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 1UF; 10V; TOL=20%; TG=-55 DEGC TO +85 DEGC; TC=X5R		
7	C9, C13, C14, C16, C18	5	GRM155R60J226ME11	MURATA	22UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 22UF; 6.3V; TOL=20%; TC=X5R		
8	C11	1	C1005X5R1V105K050BC	TDK	1UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 1UF; 35V; TOL=10%; TG=-55 DEGC TO +85 DEGC; TC=X5R		
9	C12	1	C1608X5R1E106M080AC; CL10A106MA8NRNC	TDK/SAMSUNG ELECTRONICS	10UF	CAPACITOR; SMT (0603); CERAMIC CHIP; 10UF; 25V; TOL=20%; TG=-55 DEGC TO +85 DEGC; TC=X5R		
10	C17	1	GRM155R71A104KA01; C1005X7R1A104K; C0402C104K8RAC	MURATA/TDK/KEMET	0.1UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 0.1UF; 10V; TOL=10%; MODEL=GRM SERIES; TG=-55 DEGC TO +125 DEGC; TC=X7R;		
11	J1, J2	2	TS-112-T-A	SAMTEC	TS-112-T-A	CONNECTOR; MALE; THROUGH HOLE; PRECISION MACHINED TERMINAL STRIP; STRAIGHT; 12PINS		
12	J3-J5	3	TS-108-T-A	SAMTEC	TS-108-T-A	CONNECTOR; MALE; THROUGH HOLE; PRECISION MACHINED TERMINAL STRIP; STRAIGHT; 8PINS		
13	L1, L4	2	DFE201610E-4R7M=P2	MURATA	4.7UH	INDUCTOR; SMT (2016); METAL ALLOY CHIP; 4.7UH; TOL=+/-20%; 1.3A		
14	L2, L3	2	DFE201612E-2R2M	MURATA	2.2UH	INDUCTOR; SMT (0806); WIREWOUND CHIP; 2.2UH; TOL=+/-20%; 1.8A		
15	R1	1	CRCW08051K00FK; ERJ-6ENF1001V; MCR10EZHF1001; RC0805FR-071KL	VISHAY DALE; PANASONIC; ROHM; YAGEO	1K	RESISTOR; 0805; 1K; 1%; 100PPM; 0.125W; THICK FILM		
16	R3	1	CRCW060339K0FK	VISHAY DALE	39K	RESISTOR, 0603, 39K OHM, 1%, 100PPM, 0.10W, THICK FILM		
17	U1	1	MAX20303	MAXIM	MAX20303	EVKIT PART- IC; WEARABLE POWER NAMAGEMENT SOLUTION; PACKAGE OUTLINE; WLP 56 PINS; 0.5MM PITCH; PKG. CODE: W563A4+1; PKG. OUTLINE: 21-100104		
18	PCB	1	MAX	MAXIM	PCB	PCB:MAX		
TOTAL		31						

MAX20303 EV Kit Schematic

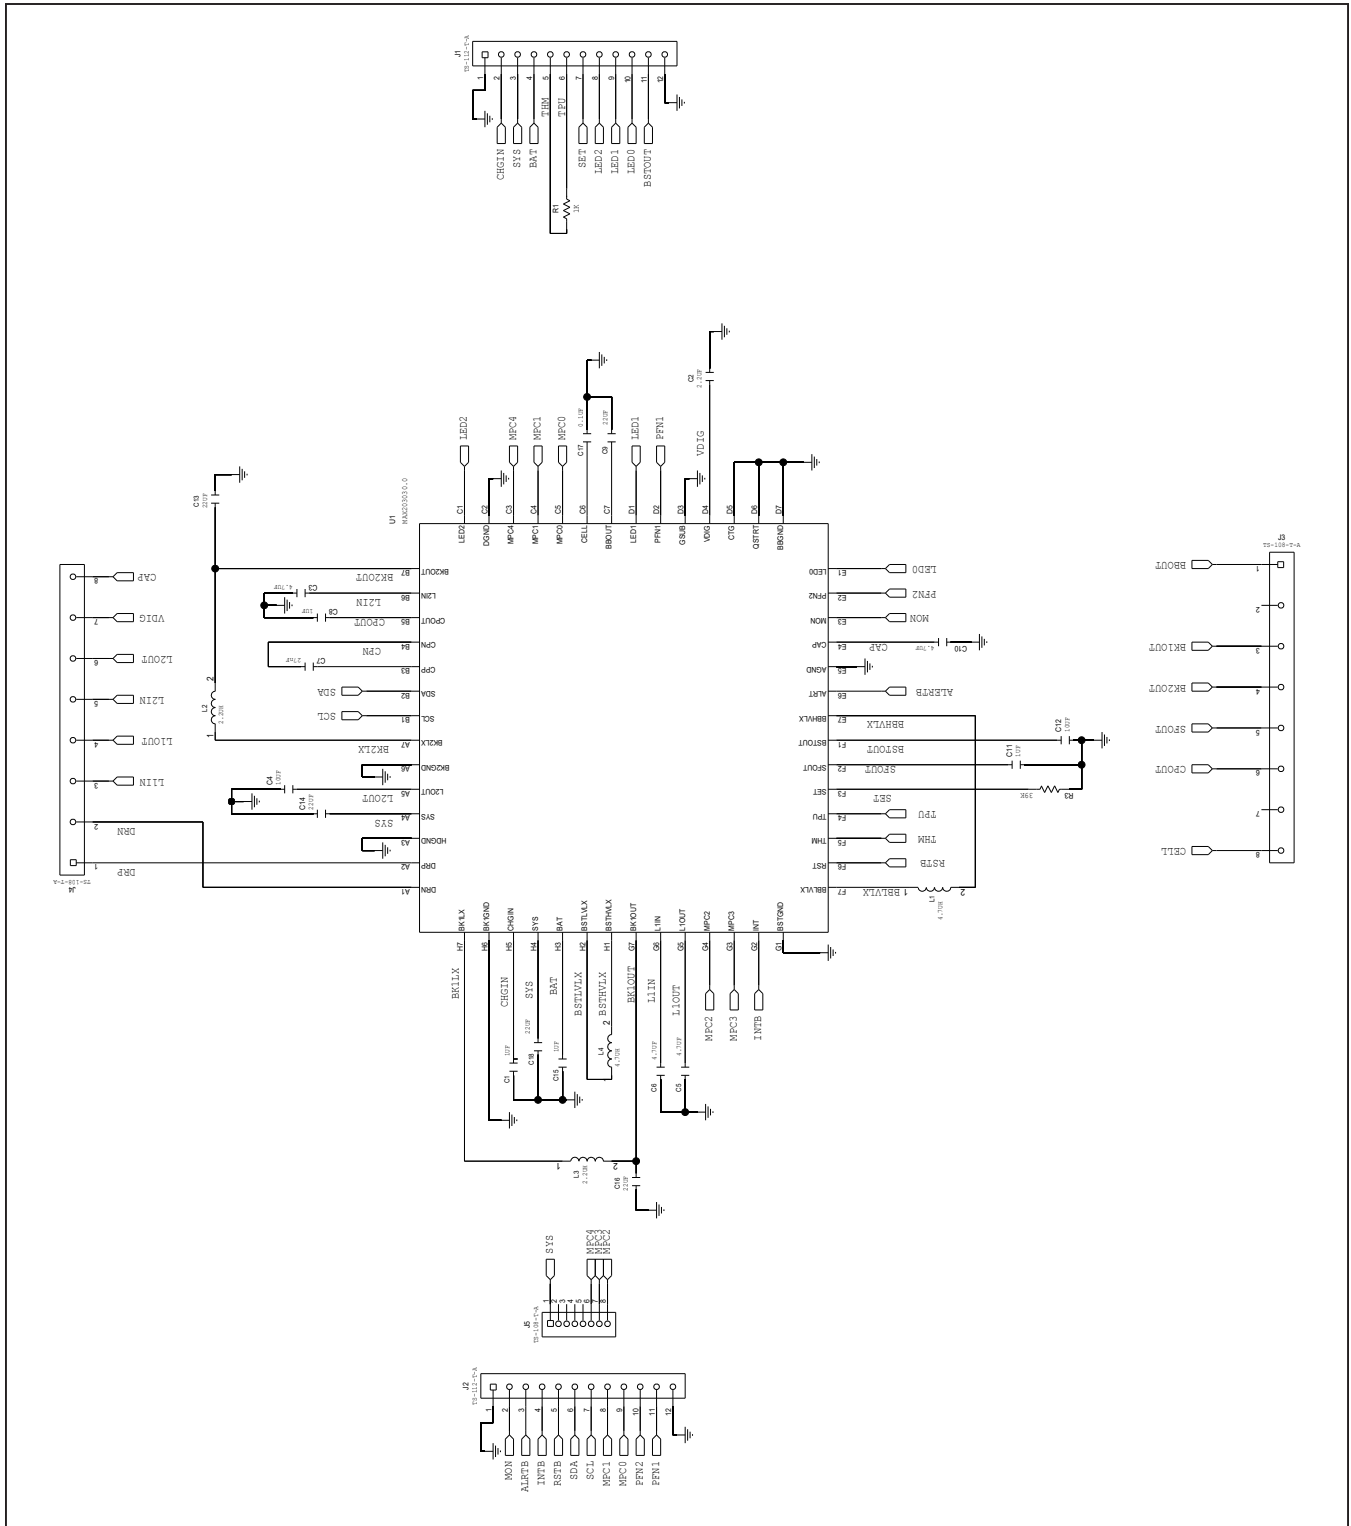





MAX20303 EV Kit PCB Layout

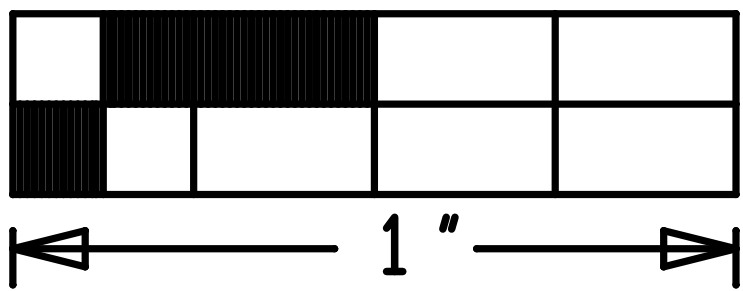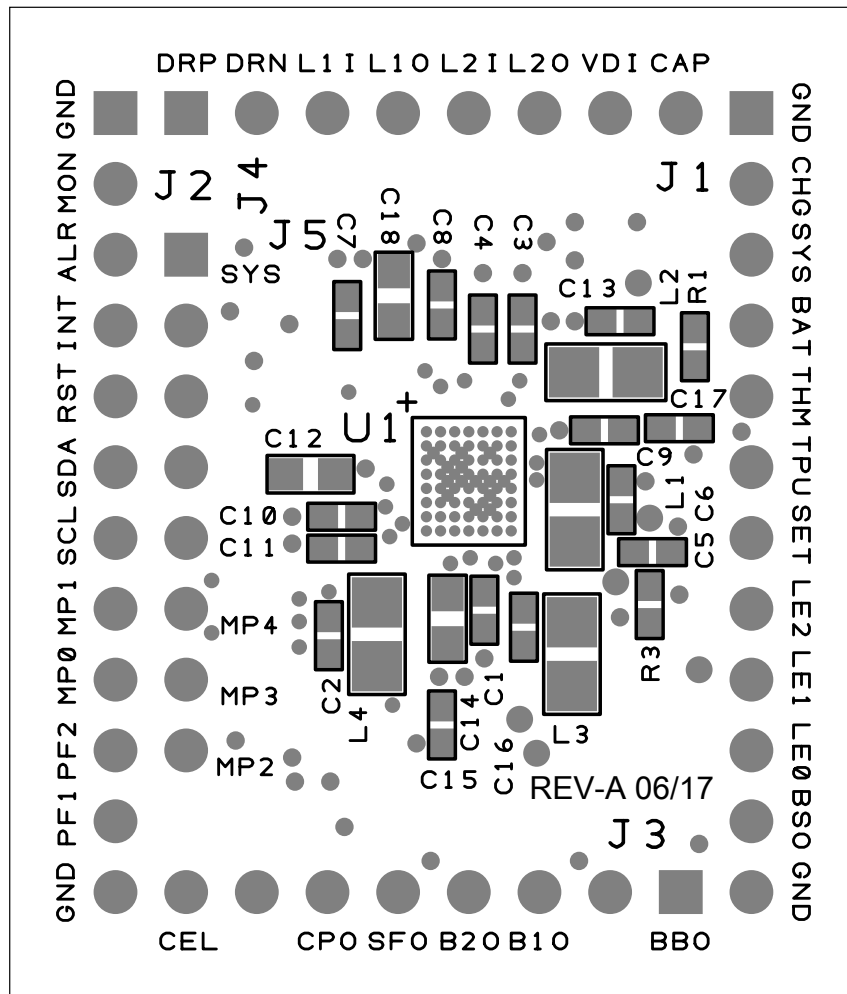



MAX20303 EV Kit—Top Silkscreen

MAX20303 EV Kit PCB Layout (continued)

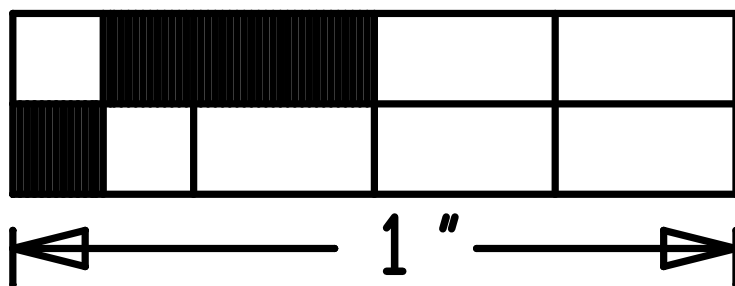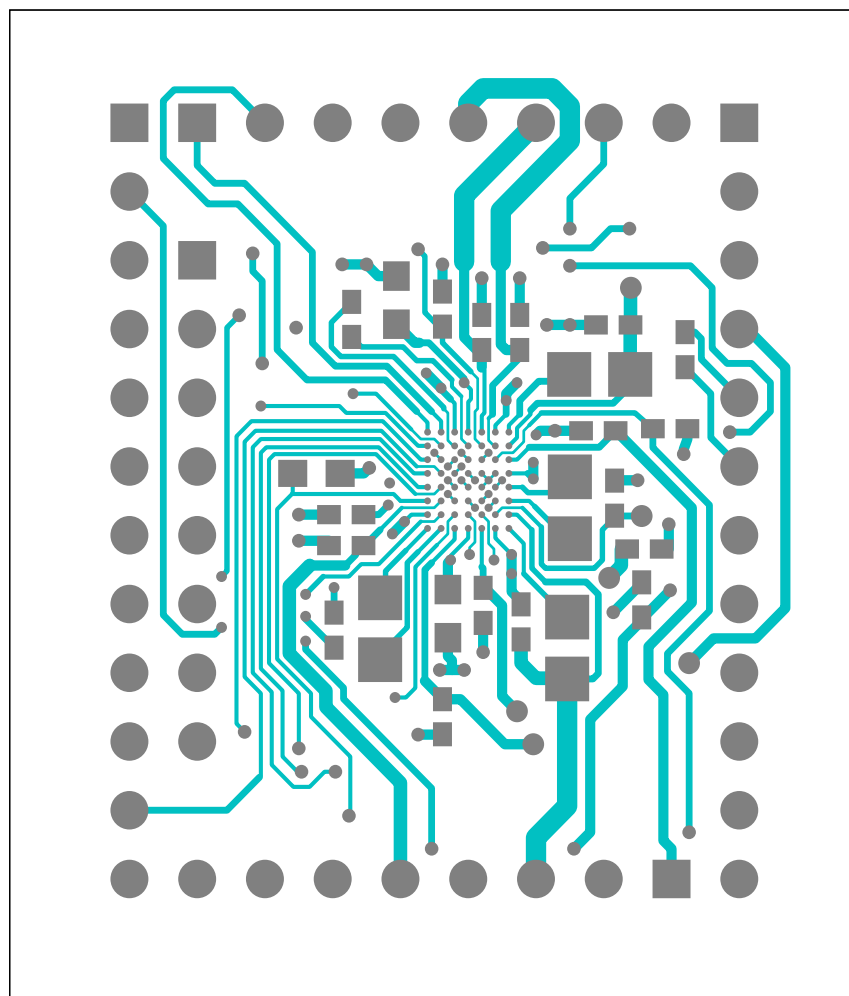



MAX20303 EV Kit—Top Copper

MAX20303 EV Kit PCB Layout (continued)

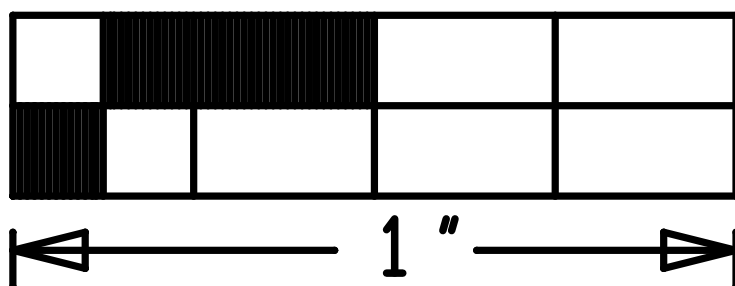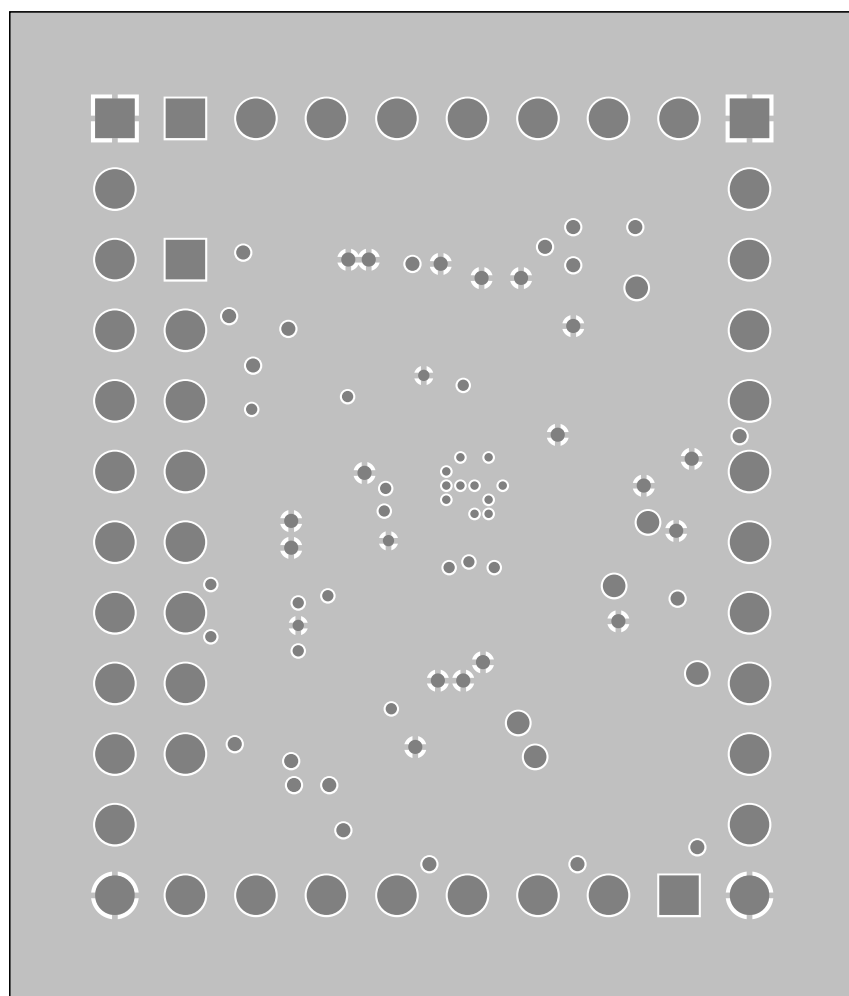



MAX20303 EV Kit—GND Plane

MAX20303 EV Kit PCB Layout (continued)

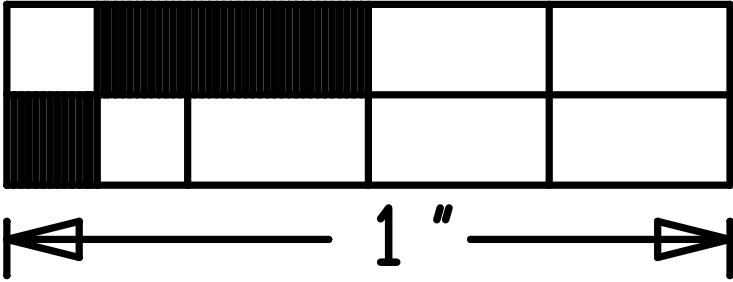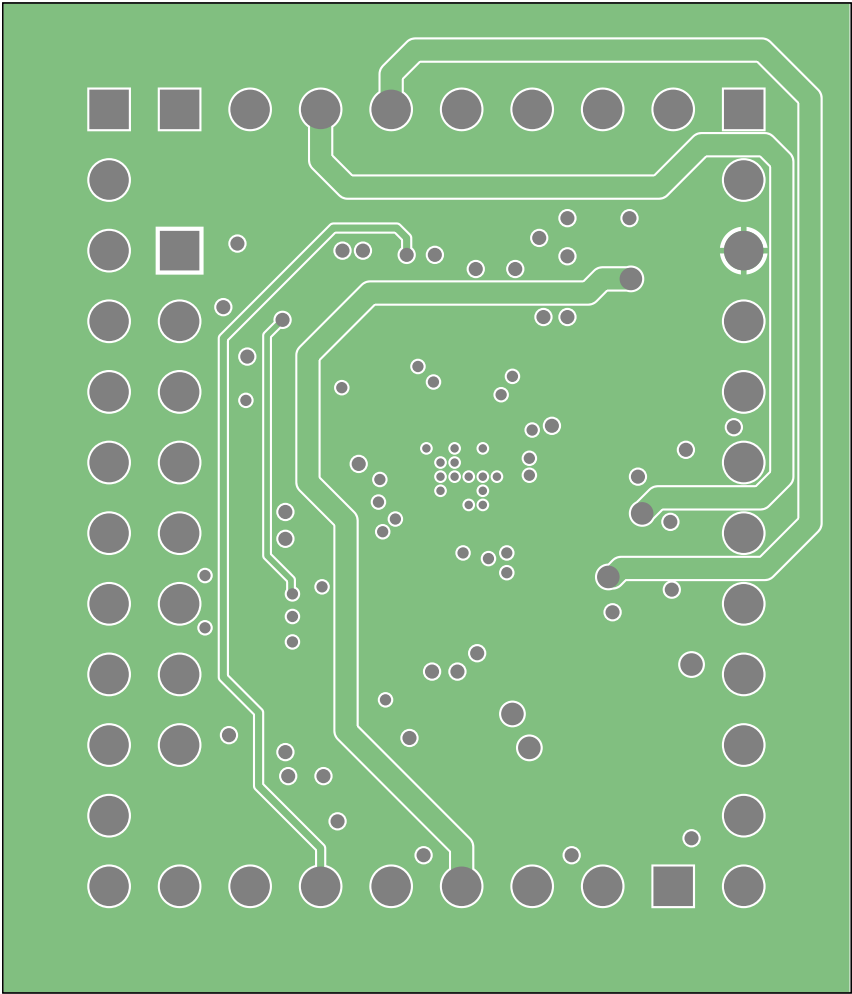


MAX20303 EV Kit—System Plane

MAX20303 EV Kit PCB Layout (continued)

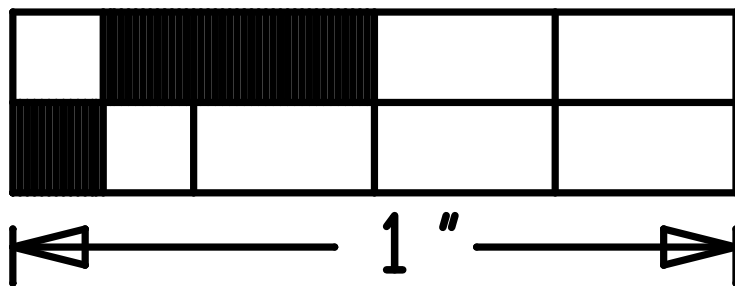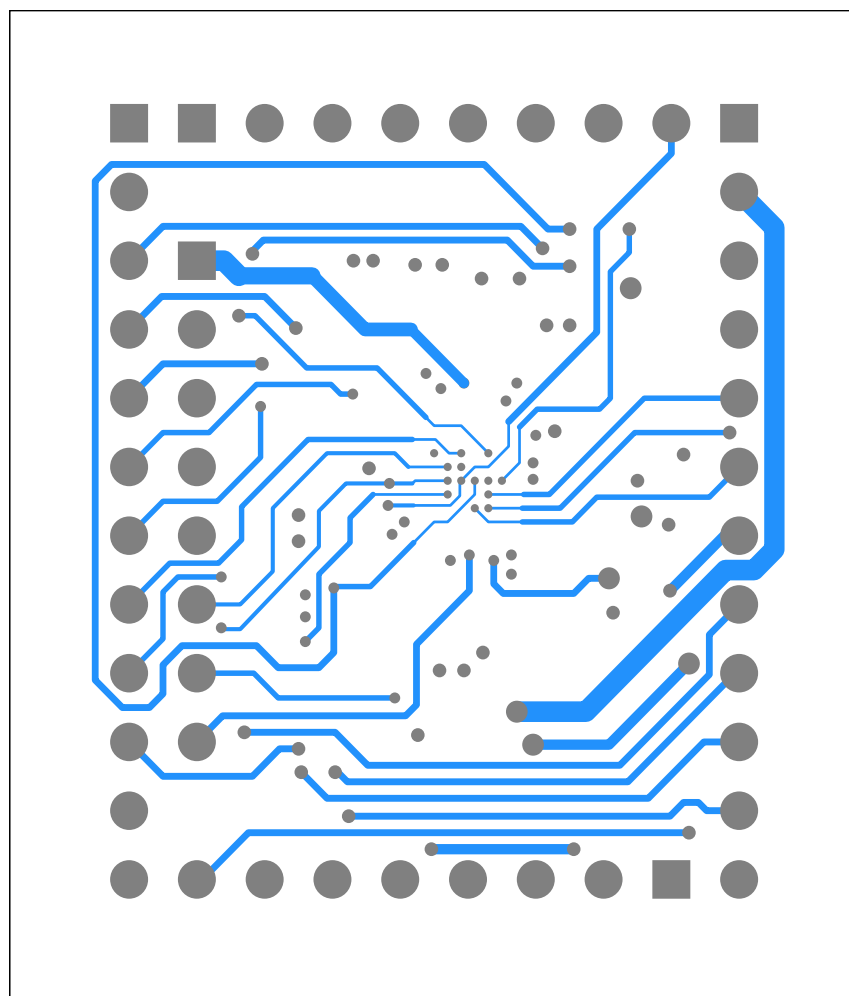

MAX20303 EV Kit—Bottom Copper

MAX20303 EV Kit PCB Layout (continued)

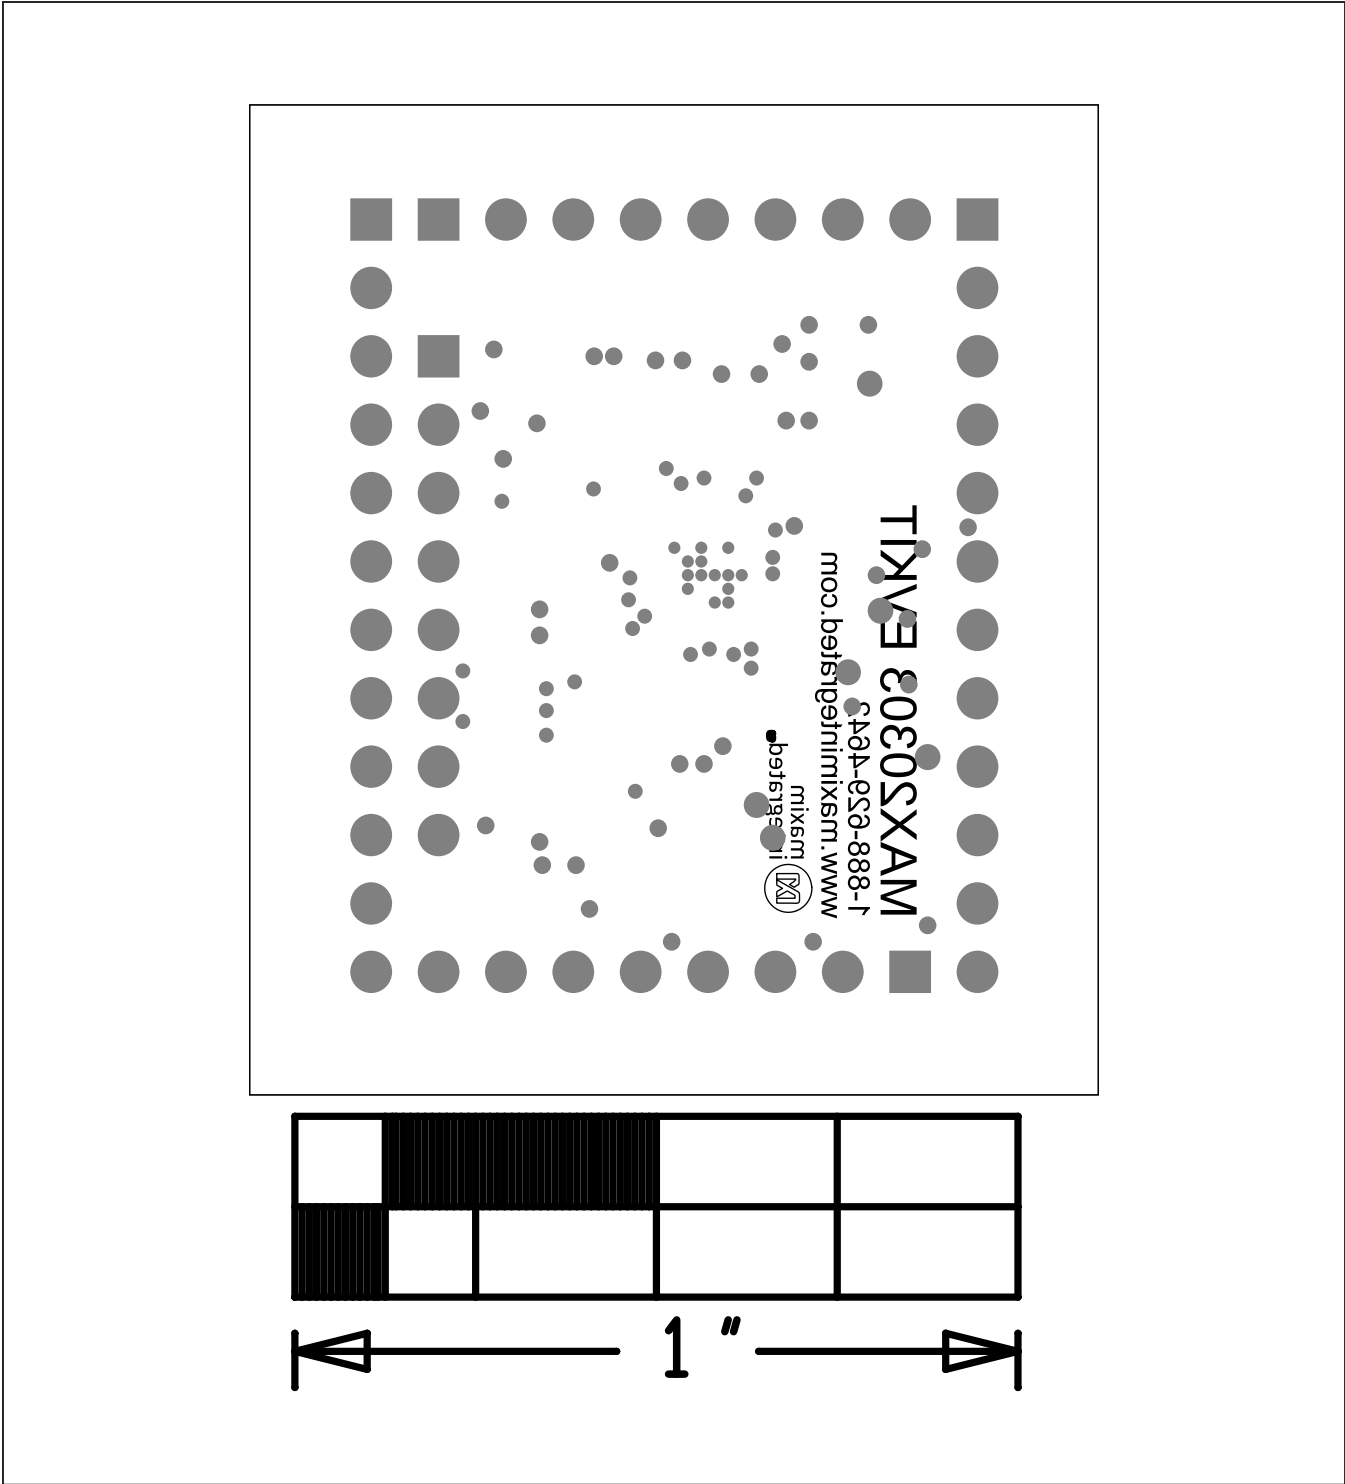

MAX20303 EV Kit—Bottom Silkscreen

### Ordering Information

PART	TYPE
MAX20303EVKIT#	EV Kit

*#Denotes RoHS Compliant*

### Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	9/17	Initial release	—

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.*