

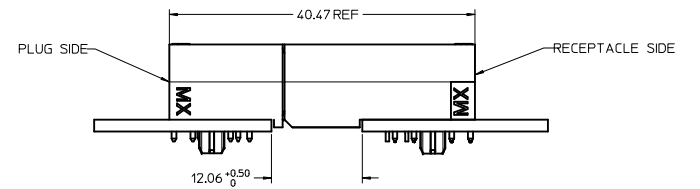


RECOMMENDED PC BOARD LAYOUT & KEEP-OUT ZONE

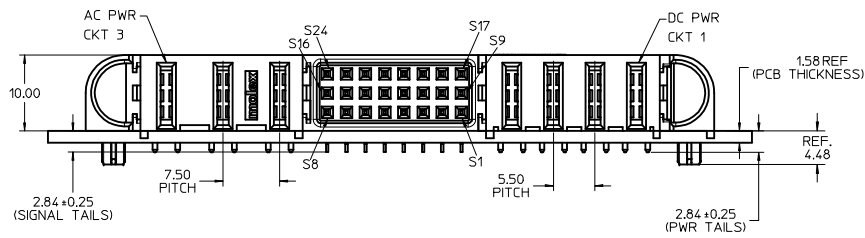

NOTES:

- MATERIAL:
  - HOUSINGS: LCP UL94, V-0, COLOR: BLACK.
  - TERMINALS: COPPER ALLOY.
  - PLATING: 0.00127 NICKEL OVERALL WITH 0.00254 SELECTIVE TIN ON SOLDER TAILS AND 0.000762 SELECTIVE GOLD ON CONTACT AREA.
- ASSEMBLIES PACKED IN TRAYS, SPO: TBD
- PC BOARD REQUIRES SOLDER THRU HOLES, REFER TO PS-46436-100 FOR DETAILS
- PRODUCT SPEC: PS-46436-100.
- APPLICATION SPEC: AS-46436-100.
- PRODUCT TO MEET RoHS REQUIREMENTS.
- ASSEMBLY MATES TO MOLEX PLUG ASSEMBLY P/N 46437-3010.

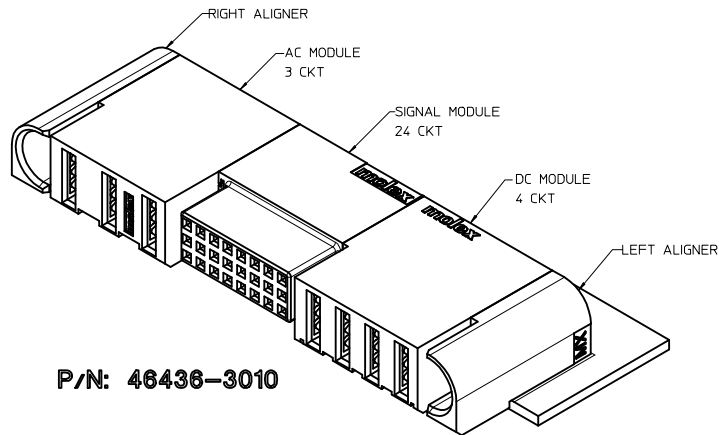

P/N: 46436-3010

RELEASED IEC NO: UCP2009-2546 2009/05/05 DRAWN: JUILLES 2009/05/05 CHKD: JKOH 2009/05/05 APPR: APATEL 2009/05/05	QUALITY SYMBOLS DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE <b>MM ONLY</b>		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		4 PLACES ± 0.25 3 PLACES ± 0.25 2 PLACES ± 0.25 1 PLACE ± 0.25	m/m INCH	DRAWN BY KJKOH	DATE 11/3/2009	TITLE RA RECEPT ASSY TEN60 POWER, GUIDES G-4P-24S-3AC-G		
		ANGULAR ± 1/2°	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	CHECKED BY KJKOH	DATE 11/3/2009	MOLEX INCORPORATED		
		MATERIAL NO. <b>46436-3010</b>	DOCUMENT NO. <b>SD-46436-310</b>	SHEET NO. 1 OF 1				