



UNIT:mm

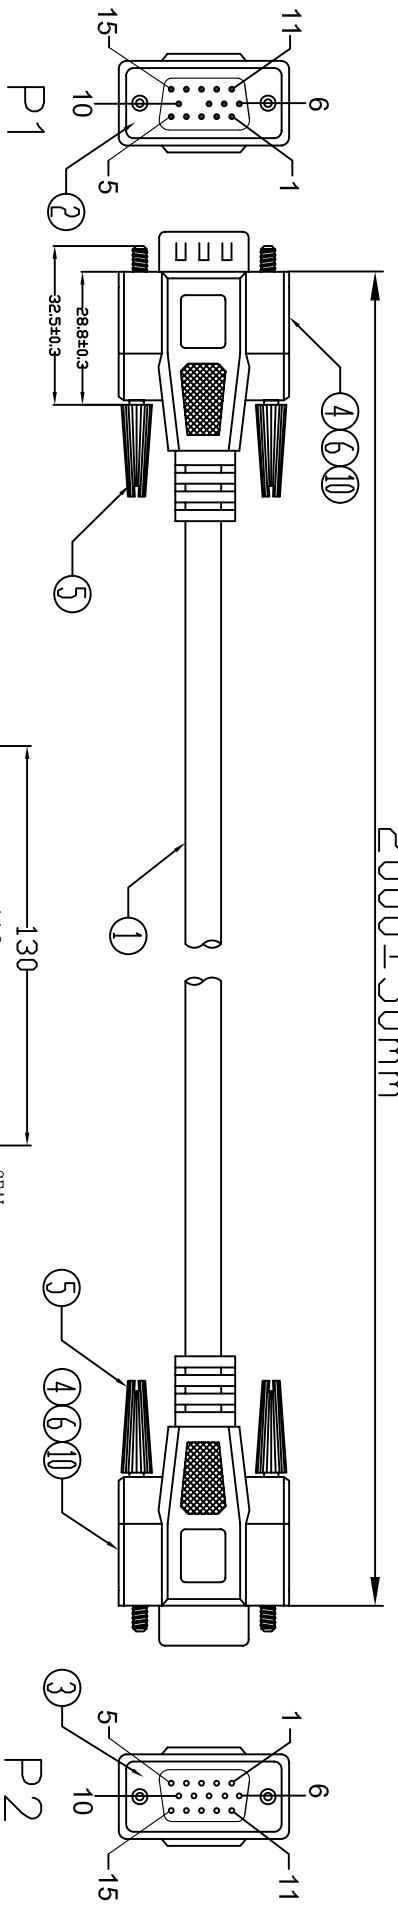

Electronic Test:
 1. 100% Test,(Open,Short,Miss Wire)
 2. Contact Resistance:3 ohm max.
 3. Insulation Resistance:5M ohm min.
 4. Hi-Pot:300V DC/10ms

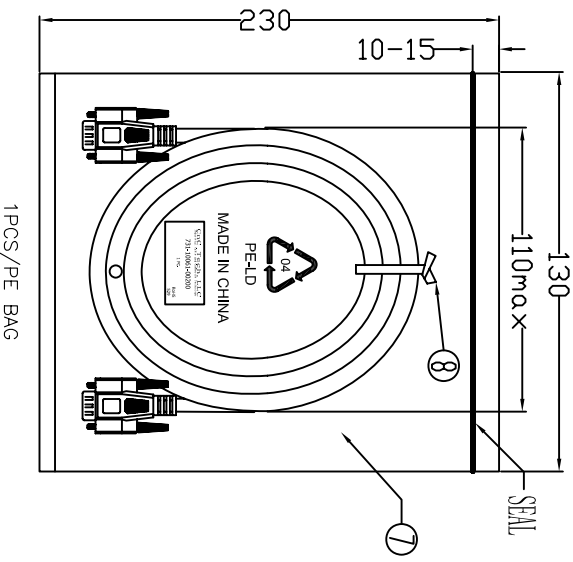

PIN ASSIGNMENT	
P1	1 white
	2 grey
	3 yellow
	4 pink
	5 orange
	6 red
	7 brown
	8 green
	10 blue
	11 purple
	12 light green
	13 light blue
	14 black
	15 white/black
Shell	drain

⑩	TUBE	2	HEAT SHRINK TUBE BLACK OD:1.5* $L=15MM$
⑨	PE BAG	1/10	CLEAR SIZE:280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑧	TIE	1	WHITE $L=120mm$
⑦	PE BAG	1	CLEAR SIZE:130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑥	COOPER FOL	2	DOUBLE-SIDED CONDUCTIVE COPPER FOL 180" W25mm* $L=55mm$
⑤	SCREW	4	SCREW:#4-40UNC L47mm,NICKEL PLATED,INSULATION COLOR BEIGE(V-29)
④	OUT JACKET	43.5g	BEIGE(V-29) 40P PVC(MOULD NO:MM-113)
	IN JACKET	8g	CLEAR LDPE(MOULD NO:MM-049)
③	CONN	1	HDD15P FEMALE,PIN G/F,SHELL-NICKEL,INSULATION COLOR:BLUE. SOLDER TYPE.
②	CONN	1	HDD15P MALE,PIN G/F,SHELL-NICKEL,INSULATION COLOR:BLUE. MISSING 9PIN SOLDER TYPE.
①	CABLE	1	NOUL 28AWG(7/0.12TQ)*14C+AL/MR+DW(7/0.12 TC) OUTTER JACKET COROL:BEIGE(V-29) OD:6.0±0.15mm. L=2000±20mm.

Cnc Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	ZHONGHSH	DRAWING NO.
CHECKED BY		CUSTOMER
APPROVAL BY		ITEM NO.
DECIDE BY		DATE
VERSIONS/EDITION	A/0	PRODUCTION

4 3 2 1