


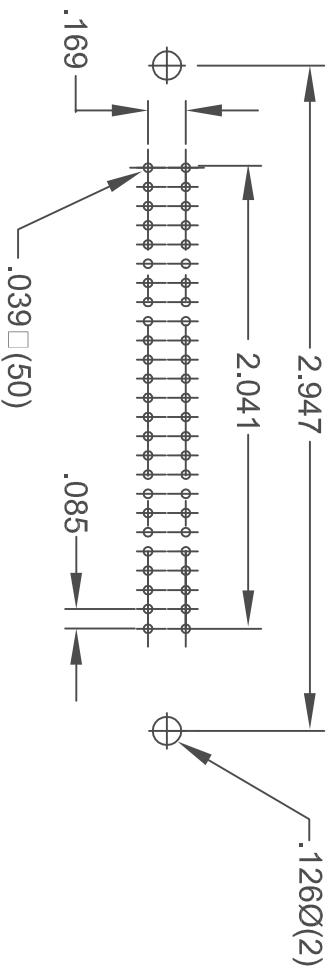


THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

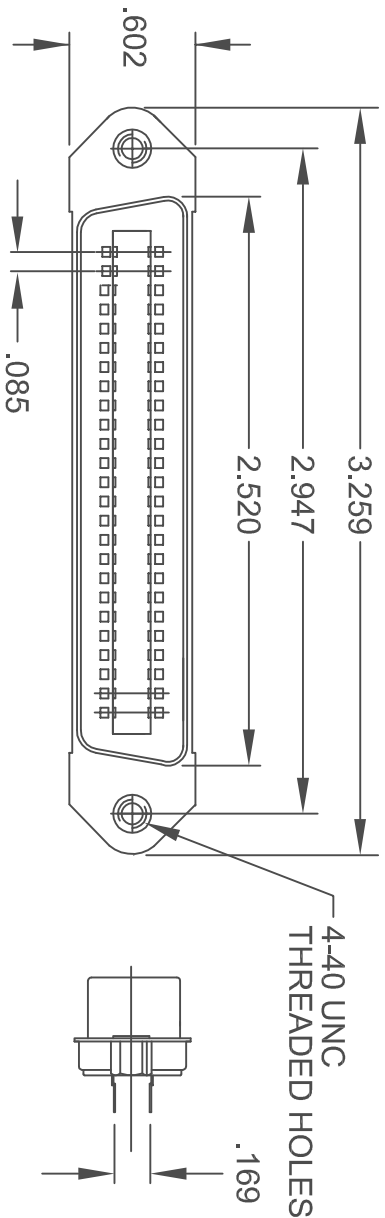

ISSUE NUMBER
ORIGINAL ①
4-40 UNC THREADED RIVETS ADDED AND COLOR ADDED F.BRIDGES AUG.24/04 ②
LEAD REMOVED FROM TIN PLATING; REF. ROHS ADDED. R.BLAKEY FEB.2/06 ③

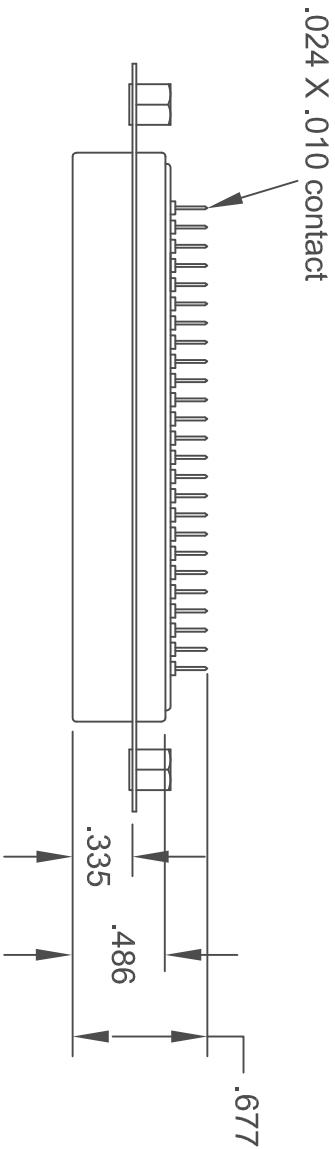

MATERIALS:

INSULATOR: GLASS-FILLED THERMOPLASTIC
UL RATED 94V-0, COLOR BLUE
CONTACTS: COPPER ALLOY
GOLD PLATED ON CONTACT AREA
TIN ON TAIL OVER NICKEL

SHELL : STEEL NICKEL PLATED


ELECTRICALS:

CONTACT CURRENT RATING: 5 AMPS
DIELECTRIC WITHSTANDING VOLTAGE:
AC 1200 R.M.S.
INSULATION RESISTANCE: 1000 mohms
MIN. AT 500V DC
CONTACT RESISTANCE: 30 MOHMS MAXIMUM
OPERATING TEMPERATURE: -55°C TO +125°C



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR ROHS COMPLIANCY.

50 POSITION MINIATURE RIBBON RECEPTACLE



YOUR CONNECTION TO QUALITY & SERVICE

ACAD REFERENCE NO. B57-050-221-202	SCALE: IN C.A.D. 1:1		SHEET 1 OF 1	ISSUE
DRAWN: F.JAWDI	DATE: APR.12.2001	CHECKED:	DATE:	3
DRAWING NUMBER B57-050-221-202				