

## HC-D 50-TFQ-76/M1PG29G


Order No.: 1775813

The illustration shows version HC-D 50-TFQ-76/M 1 PG 21 G



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1775813>

Sleeve housing, for double locking latch, height 76 mm, with screw connection, 1x Pg29, straight cable entry

Commercial data	
GTIN (EAN)	 4 017918 038366
sales group	D011
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 514 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
02/24/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### General data

Note	For contact inserts HC-D25, A16/A32
Design	D50
Height	76 mm
Width	56 mm
Length	82 mm
Housing type	Sleeve housings
Locking type	For double locking latch
Cable exit	Straight
Type of the screw connection	1x Pg29
Pg screw connection	With
Wrench size, union nut	37 mm
External cable diameter	18 mm ... 27 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Cable gland material	Nickel-plated brass
Cable seal material	NBR

## Certificates / Approvals




Certification

GOST

**Diagrams/Drawings**

Dimensioned drawing

---

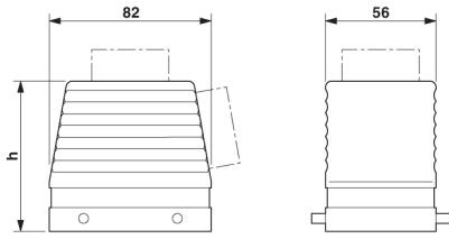

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;