


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		A1	REVISED PER ECO-11-020548	06FEB12	KH	DR

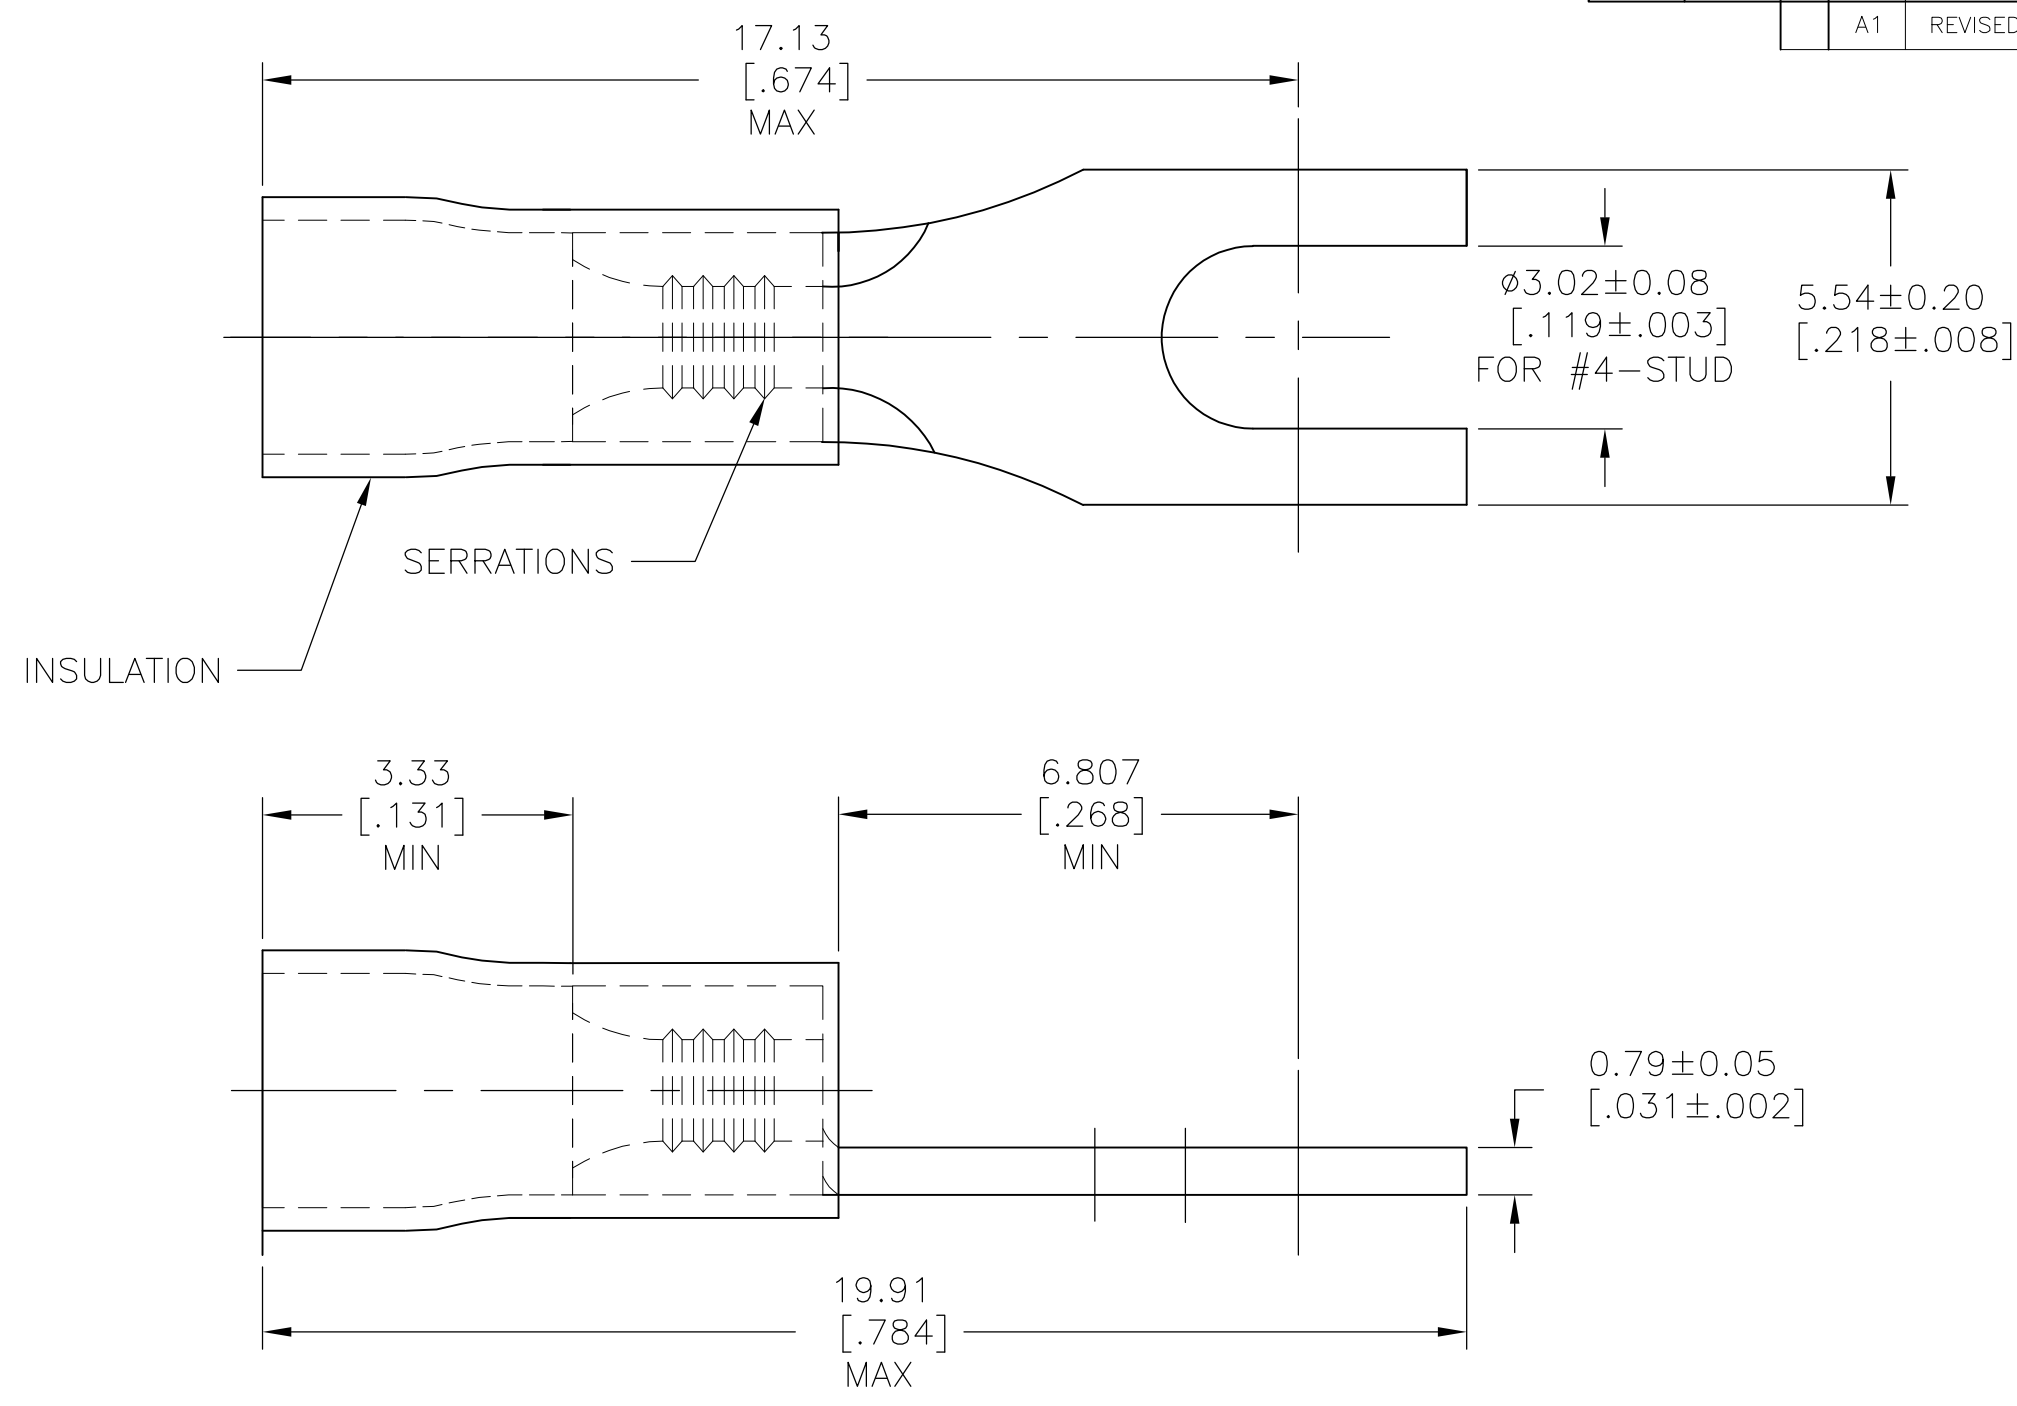

- 1. COPPER PER ASTM B152  
INSULATION: PVC, RED
- 2. TIN PLATE PER ASTM B545
- 3. FOR 3.68[.145] TO 4.06[.160]  
MAX INSULATION DIAMETER

OBSOLETE	-	-	2-165004-1
	1000	LOOSE PIECE	165004
	QTY	PACKAGE TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KIRAN HOLAL 06FEB12	<b>STE</b> TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK ROHDE DANIEL 06FEB12		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD ROHDE DANIEL 06FEB12	NAME TERMINAL, SPADE, PLASTI-GRIP, WIRE SIZE: 22-16 AWG	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC -	RESTRICTED TO -	
MATERIAL		APPLICATION SPEC -	SIZE A3	CAGE CODE 00779
FINISH		WEIGHT -	DRAWING NO C-165004	
- 1		CUSTOMER DRAWING		SCALE 8:1
- 2		SHEET 1 OF 1		REV A1