


HC-B 24-SML-67/M2PG21

Order No.: 1771998

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771998>Box mounting base, with single locking latch, height 67 mm, with
screw connection, 2x Pg21

| Commercial data | |
|--------------------------|---|
| GTIN (EAN) |  4 017918 036676 |
| sales group | D002 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Catalog page information | Page 497 (PC-2009) |

Product notesWEEE/RoHS-compliant since:
03/01/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| General data | |
|--------------|--------------------|
| Design | B24 |
| Height | 67 mm |
| Width | 57 mm |
| Length | 144 mm |
| Housing type | Box mounting bases |

| | |
|---------------------------------|---------------------------------|
| Type of the screw connection | 2x Pg21 |
| Pg screw connection | With |
| Wrench size, union nut | 28 mm |
| External cable diameter | 10 mm ... 19 mm |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |
| Seal material | NBR |
| Cable gland material | Nickel-plated brass |
| Cable seal material | NBR |
| Material lock | High-grade steel, handle: PA-GF |
| Material grip body interlock | PA-GF |

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

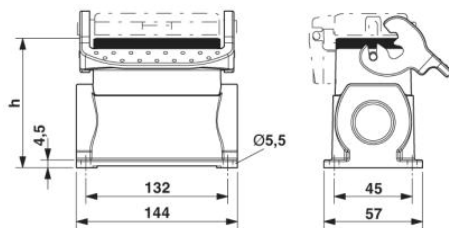

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;