


-Protection level: IP65/67
 -Temperature range: -40°C ...+70°C

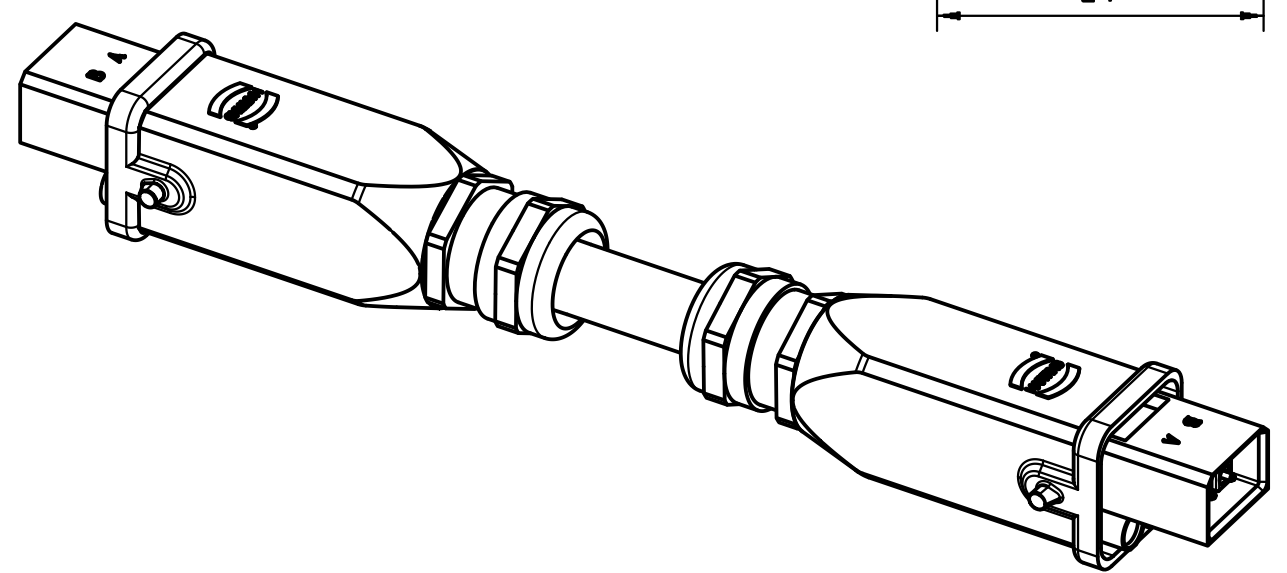

9	Hybrid cable 2xFO+3x2,5/3,5	33 57 211 300 5004	300 m
8	Hybrid cable 2xFO+3x2,5/3,5	33 57 211 100 5004	100 m
7	Hybrid cable 2xFO+3x2,5/3,5	33 57 211 060 5004	60 m
6	Hybrid cable 2xFO+3x2,5/3,5	33 57 211 050 5004	50 m
5	Hybrid cable 2xFO+3x2,5/3,5	33 57 211 040 5004	40 m
4	Hybrid cable 2xFO+3x2,5/3,5	33 57 211 020 5004	20 m
3	Hybrid cable 2xFO+3x2,5/3,5	33 57 211 010 5004	10 m
2	Hybrid cable 2xFO+3x2,5/3,5	33 57 211 005 5004	5 m
1	Hybrid cable 2xFO+3x2,5/3,5	33 57 211 001 5004	1 m
Cont No.	Type of cable	Part-No.	Dim. a

All Dimensions in mm Original Size DIN A 3		Techn. Character.		Nicht tolerierte Maße/	
<i>For Information Only</i> <i>-won't be replaced when changed-</i>		Dat.		Name	
		Detail. 07.12.09 MS		Maßstab/Scale	
		Insp. 07.12.09 MS		/	
		Stand.			
DRS609A		HARTING Electronics GmbH & Co. KG		Hybrid cable assembly, 2xFO + POWER 3x2,5 mm ² 2xHAN3A, LC duplex SM, 3xpower DC	
Mod. Dat. Name		D-32339 ESPELKAMP			
				Sub. Sub	

Alle Rechte vorbehalten/ All rights reserved