


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/13/09	B	DIM. 152.0 WAS 762.0	T B	B S	
1/15/10	C	MOVED WIRES HOLE FROM TOP TO BOTTOM	T B	B S	
3/05/10	D	RED WIRE WAS FOR NEGATIVE TERMINAL	T B	B S	

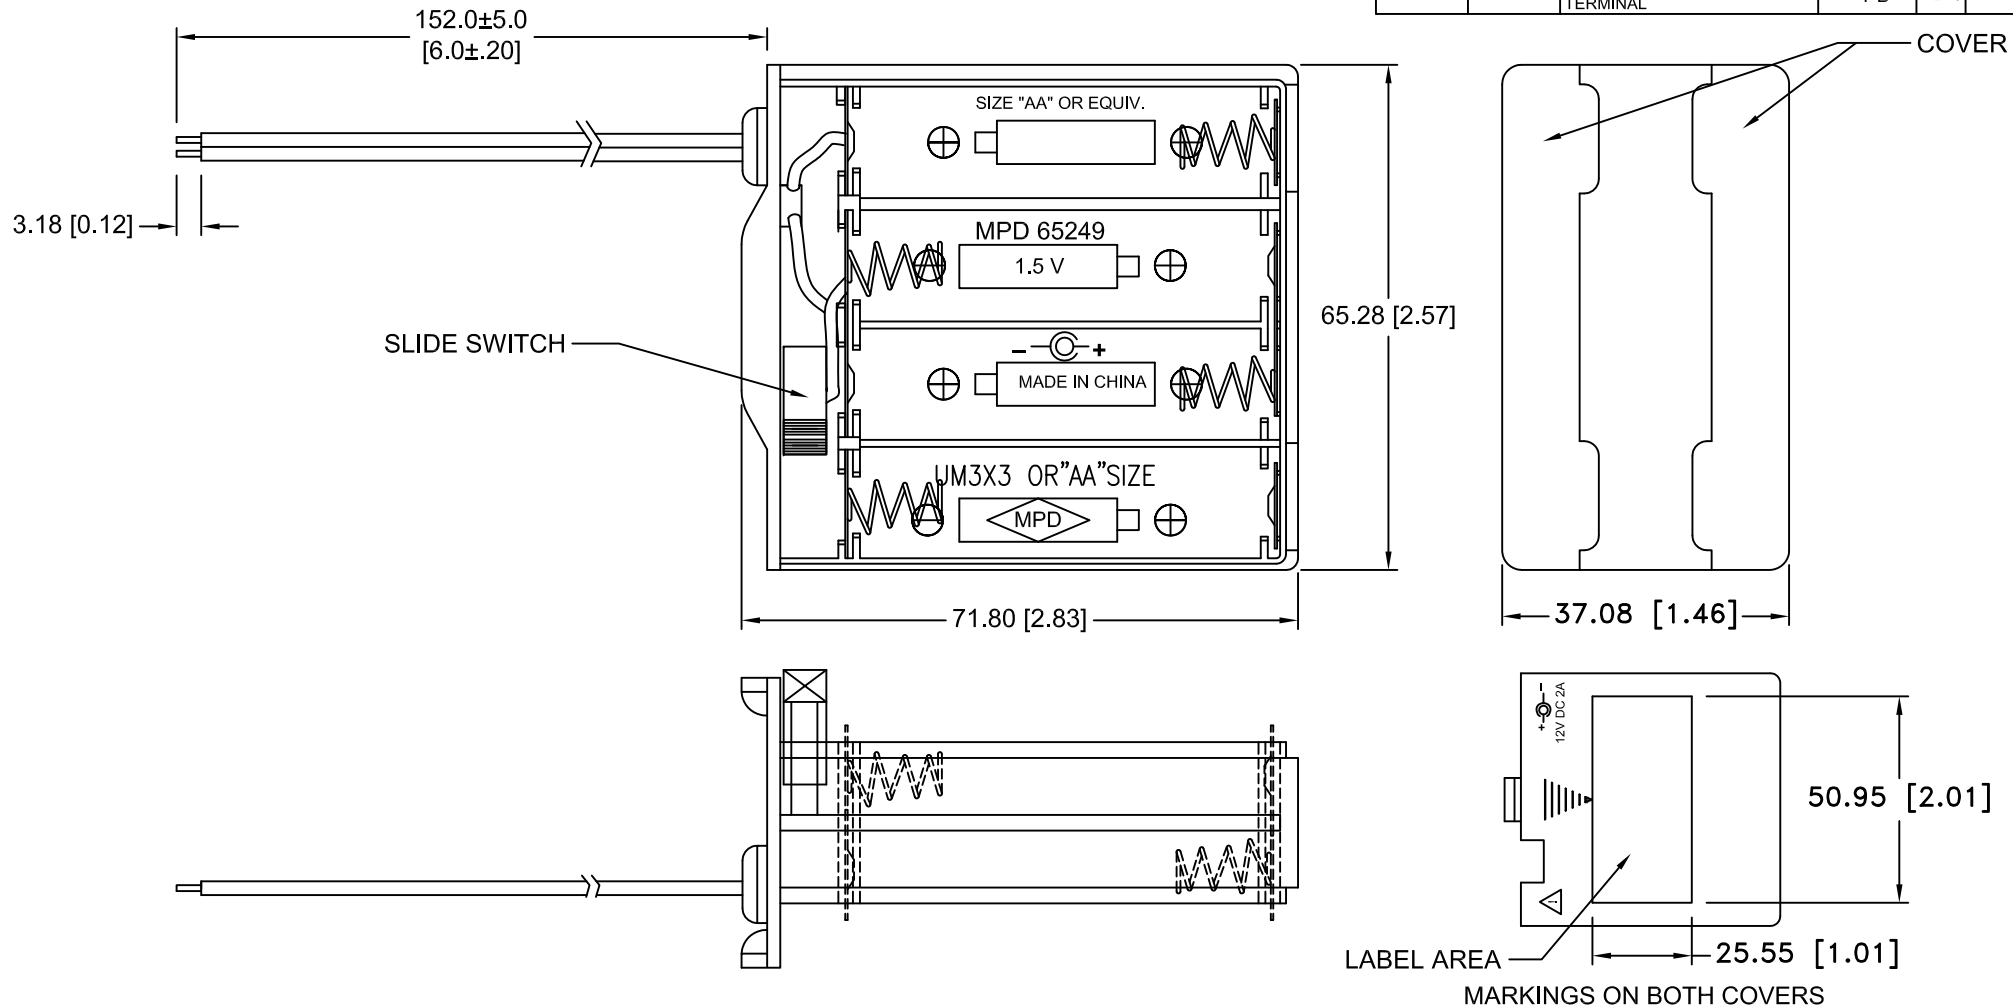

NOTES:

1. MATERIAL:


HOUSING : BLACK POLYPROPYLENE, UL94V-0, 2% TO 5% TALC FILLED

SPRING: SPRING STEEL, NICKLE PLATED

CONTACTS: SPRING STEEL, NICKLE PLATED

WIRE: 18AWG, UL2468, BROWN FOR NEGATIVE TERMINAL, RED FOR POSITIVE TERMINAL

SWITCH RATED FOR 0.5A-50VDC

Tolerance (Except as noted)		Memory Protection Devices, Inc	
		200 Broad Hollow Road, Farmingdale, New York 11735	
decimal ±.5 (.020)		Scale	Drawn By B.S.
			Approved By T.B.
Fractional ± .8 (.030)		Title EIGHT "AA" CELL HOLDER WITH COVERS	
		Date 3/05/10	Drawing Number BK-6049