

6

5

4



3

2

1


PART NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300610218	103007A45M020	6' 6.74' +3.50'/-0' [2M +88.9/-0 mm]

AUX VIEW
SCALE 1:4

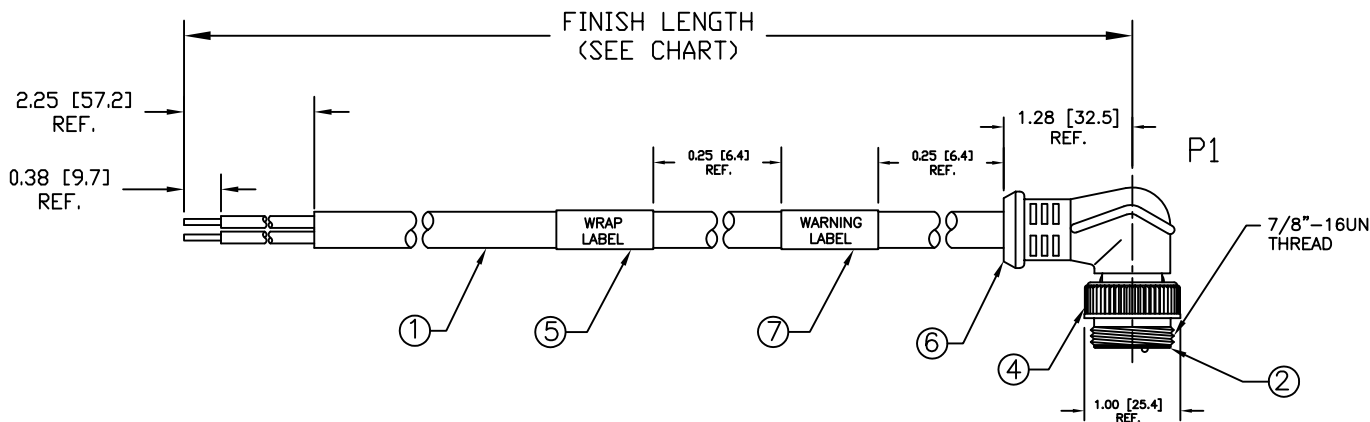


NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE
- 4) ELECTRICAL DATA:
 INLINE CORDSET
 MALE A-SIZE WITH FLYING LEADS
 16AWG UNSHIELDED
 POLES: 3
 MAX. VOLTAGE: 600V
 MAX. CURRENT 13A
 PROTECTION IP67
 TEMPERATURE RANGE: -20°C TO 90°C
- 5) PACKAGING:
 CABLE ASSEMBLIES ARE BAGGED SEPERATELY
 IN POLY BAGS WITH BAR CODE LABEL ATTACHED
 TO OUTSIDE OF BAG.
- 6) ASSEMBLY IS RoHS COMPLIANT.
- 7) CERTIFICATION:
 UL2237, FILE NO. E258922



WIRING DIAGRAM



FACE VIEW
MALE

7		1	DANGER LABEL	VINYL	BLACK	SD RELEASE EC NO.: WNA2010-0447 DRWN: YOU 2010/01/19 CHKD: BWOODMAN APPR: JFMURPHY 2010/01/25 DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
6		A/R	MOLDING COMPOUND	PVC	GRAY			mm		INCH		DRAWN BY		DATE		TITLE	
5		1	WRAP LABEL	VINYL	YELLOW			4 PLACES	±---	±---	CHECKED BY		DATE		MINI-CHANGE BRAD POWER 3P MALE 90 DEGREE #16/3 AWG PVC DROP CABLE MOLEX INCORPORATED		
4		1	MALE COUPLING NUT	ZINC ALLOY	BLACK E-COAT			3 PLACES	±---	±0.05	BWOODMAN		2010/01/21				
3		3	PIN CONTACT	BRASS	GOLD PLATE			2 PLACES	±0.13	±0.10	APPROVED BY		DATE		DOCUMENT NO.		
2		1	3P MALE INSERT	PVC	BLACK			1 PLACE	±0.25	±0.20	JFMURPHY		2010/01/22		SD-130061-020		
1		SEE TABLE	#16/3 CABLE	PVC JACKET	GRAY			ANGULAR ±1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SHEET NO. 1 OF 1			
ITEM	QTY	DESCRIPTION		MATERIAL	FINISH	SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

6

5

4

3

2

1