



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-E-004947(A)	H.S.		10.7.23					
2	DIS-E-005436(B)	H.S.H.Y.		11.4.27					

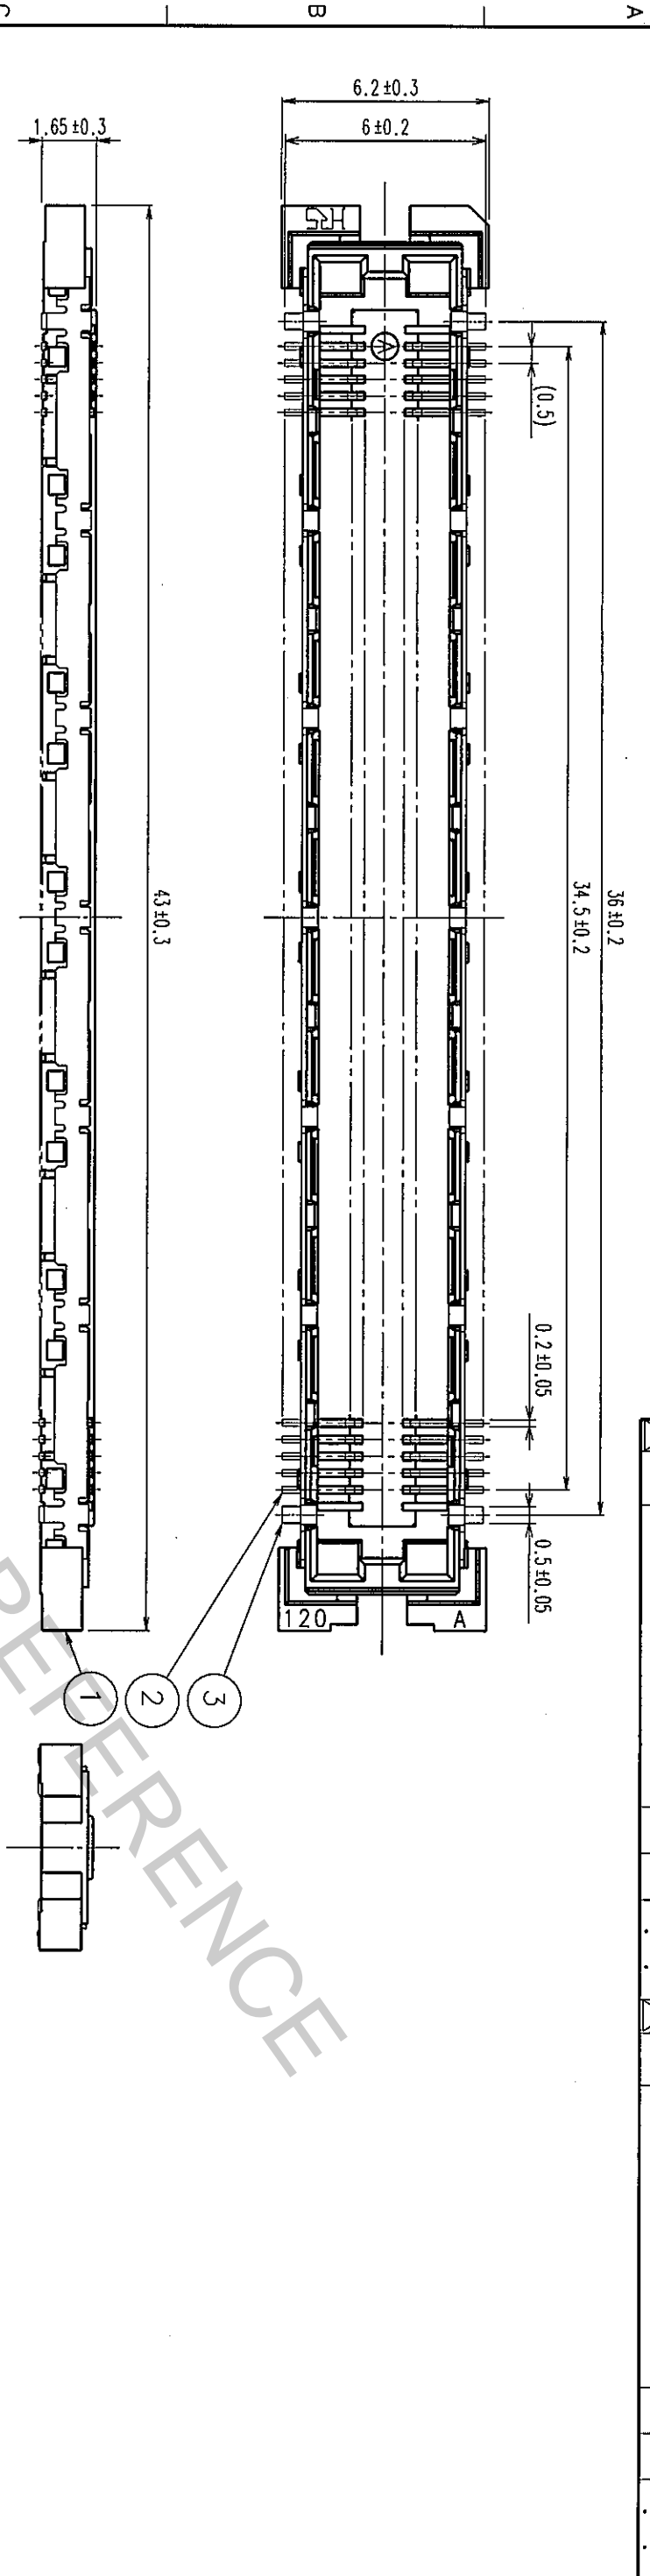

RECOMMENDED LAND PATTERN DIMENSION OF PCB

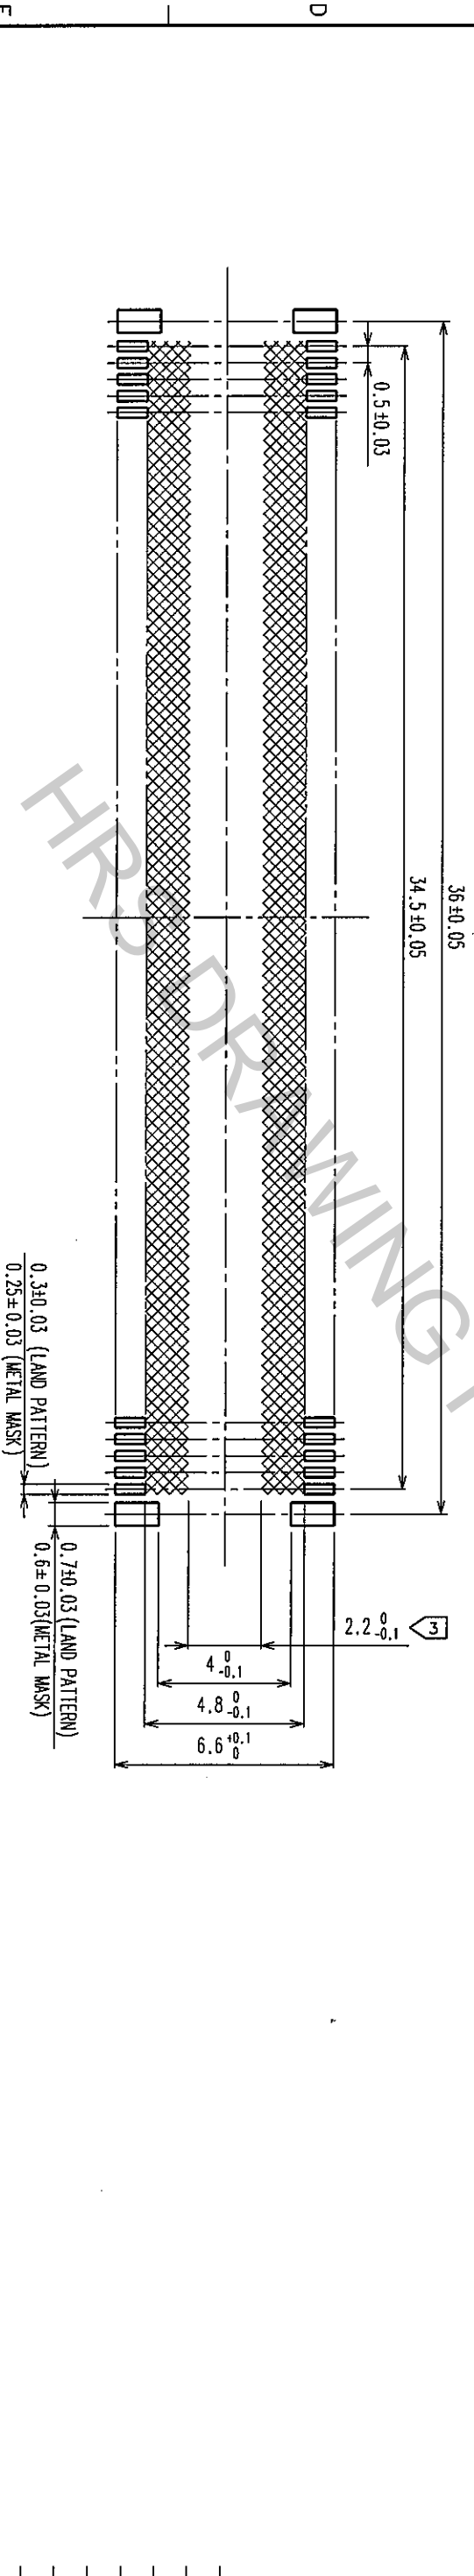

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX. TO PATTERN FOR MOUNTING.
 - THIS PRODUCT HAS NO POLARITY. MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
2	PHOSPHOR BRONZE	CONTACT AREA: GOLD (0.1um) OVER NICKEL	3	PHOSPHOR BRONZE	TIN PLATED
1	LCP	LEAD: GOLD FLASH OVER NICKEL			

SCALE	5 : 1
DRAWING NO.	EDC3-152123
PART NO.	FX11LB-140S-SV
CODE NO.	CL573-0155-8
DRAWN	<i>J. Matsumoto</i>
DESIGNED	<i>A. Matsumoto</i>
CHECKED	<i>M. Saito</i>
APPROVED	<i>J. Yoshimura</i>
RELEASED	

TO
PCK