

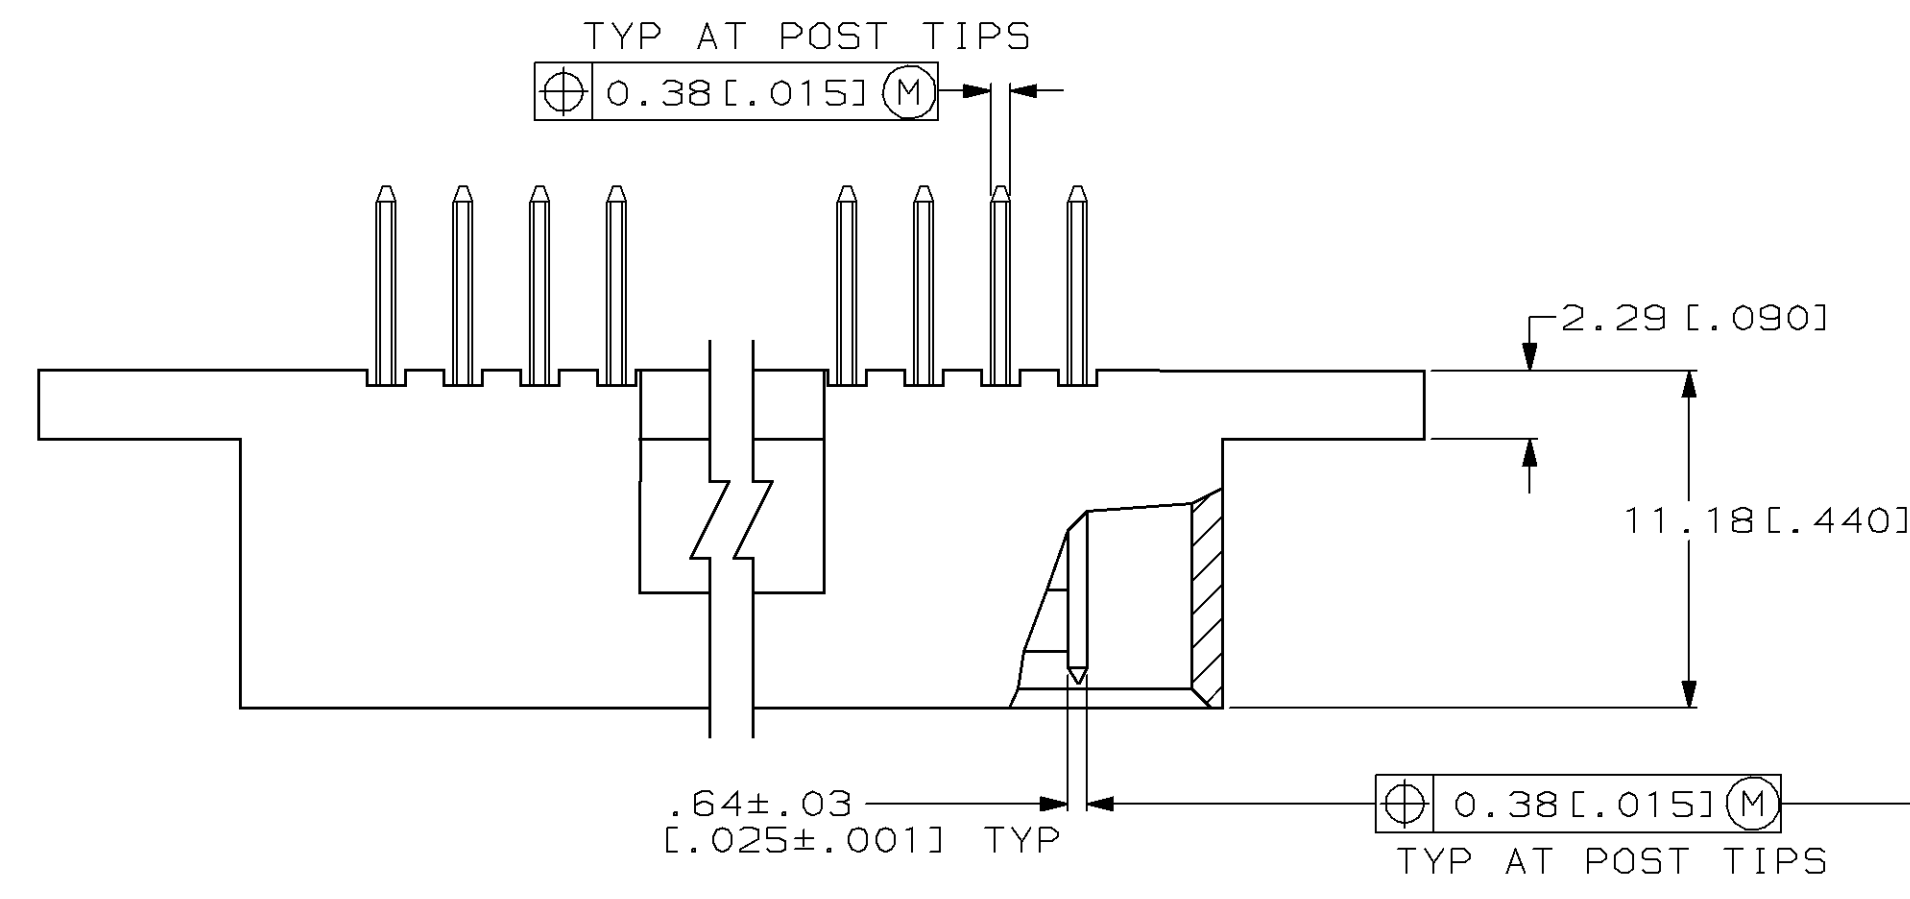
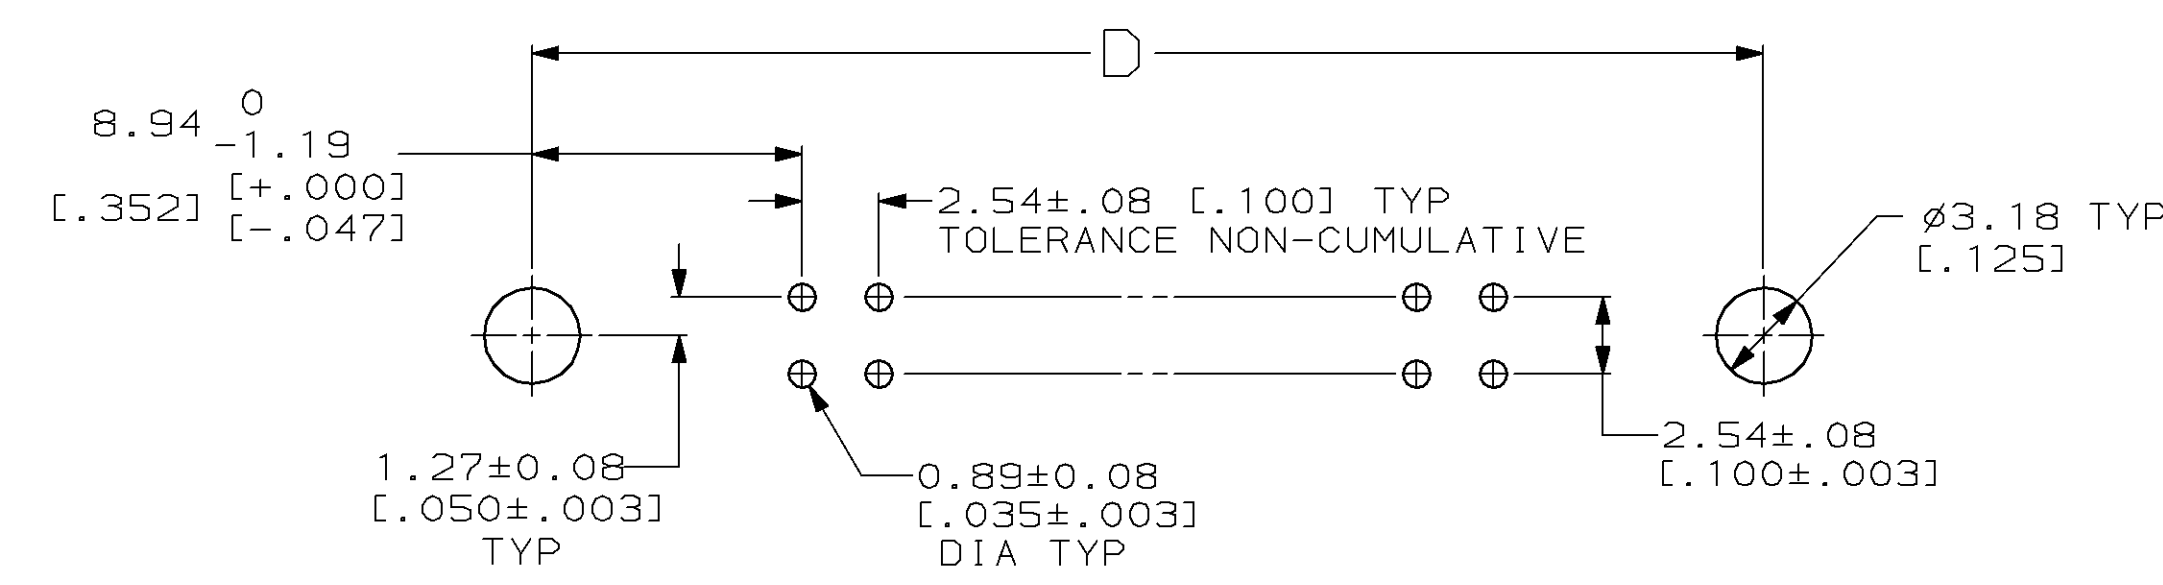
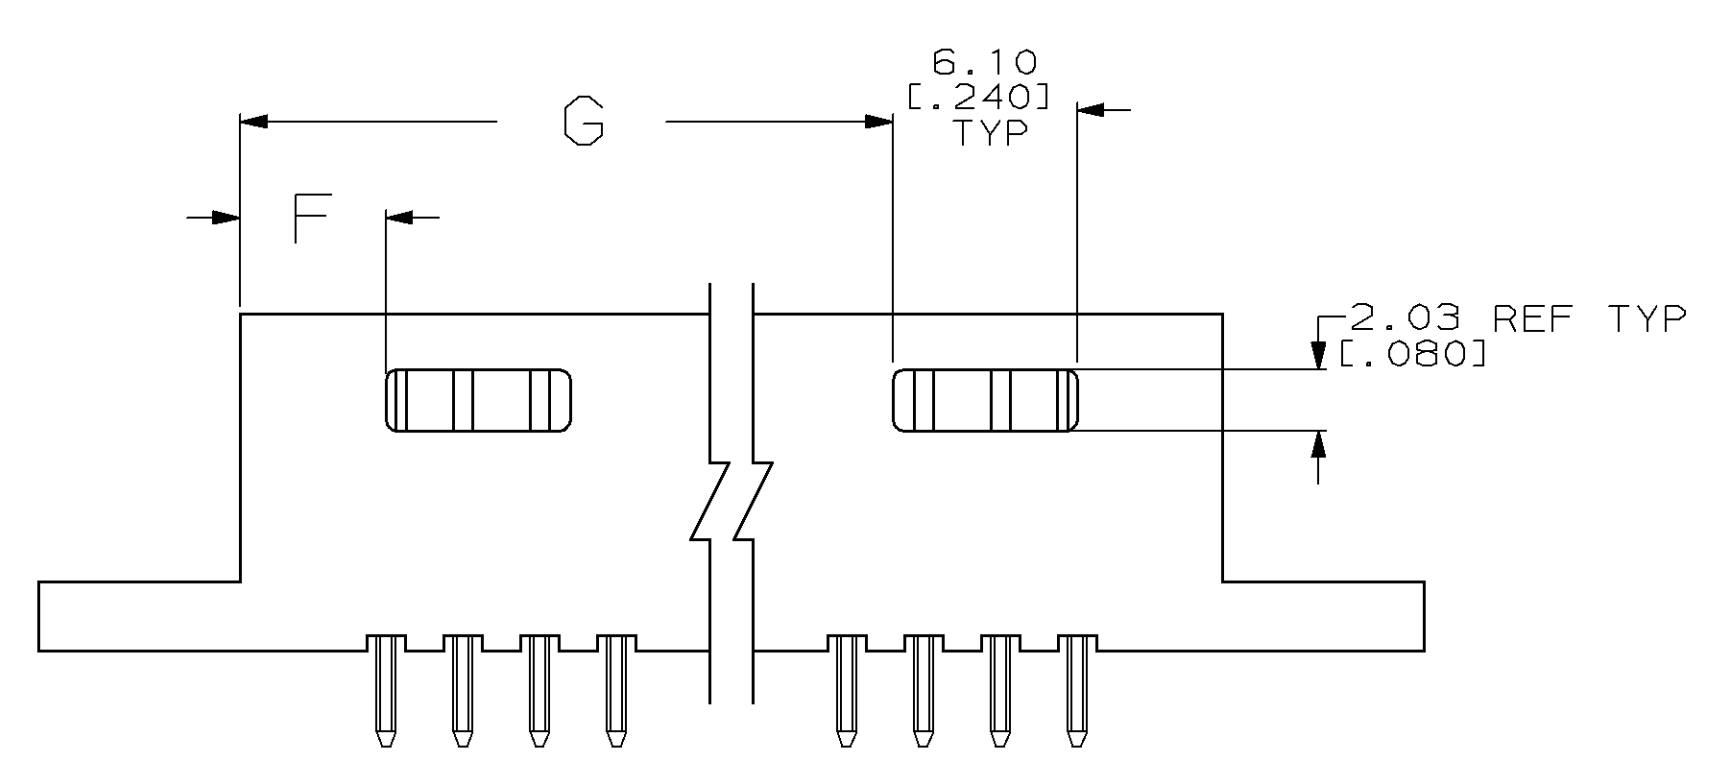


LOC		DIST		REVISIONS			
AD	39	P	LTR	DESCRIPTION	DATE	DMN	APVD
		0		RELEASED	12-FEB-97	EB	SS

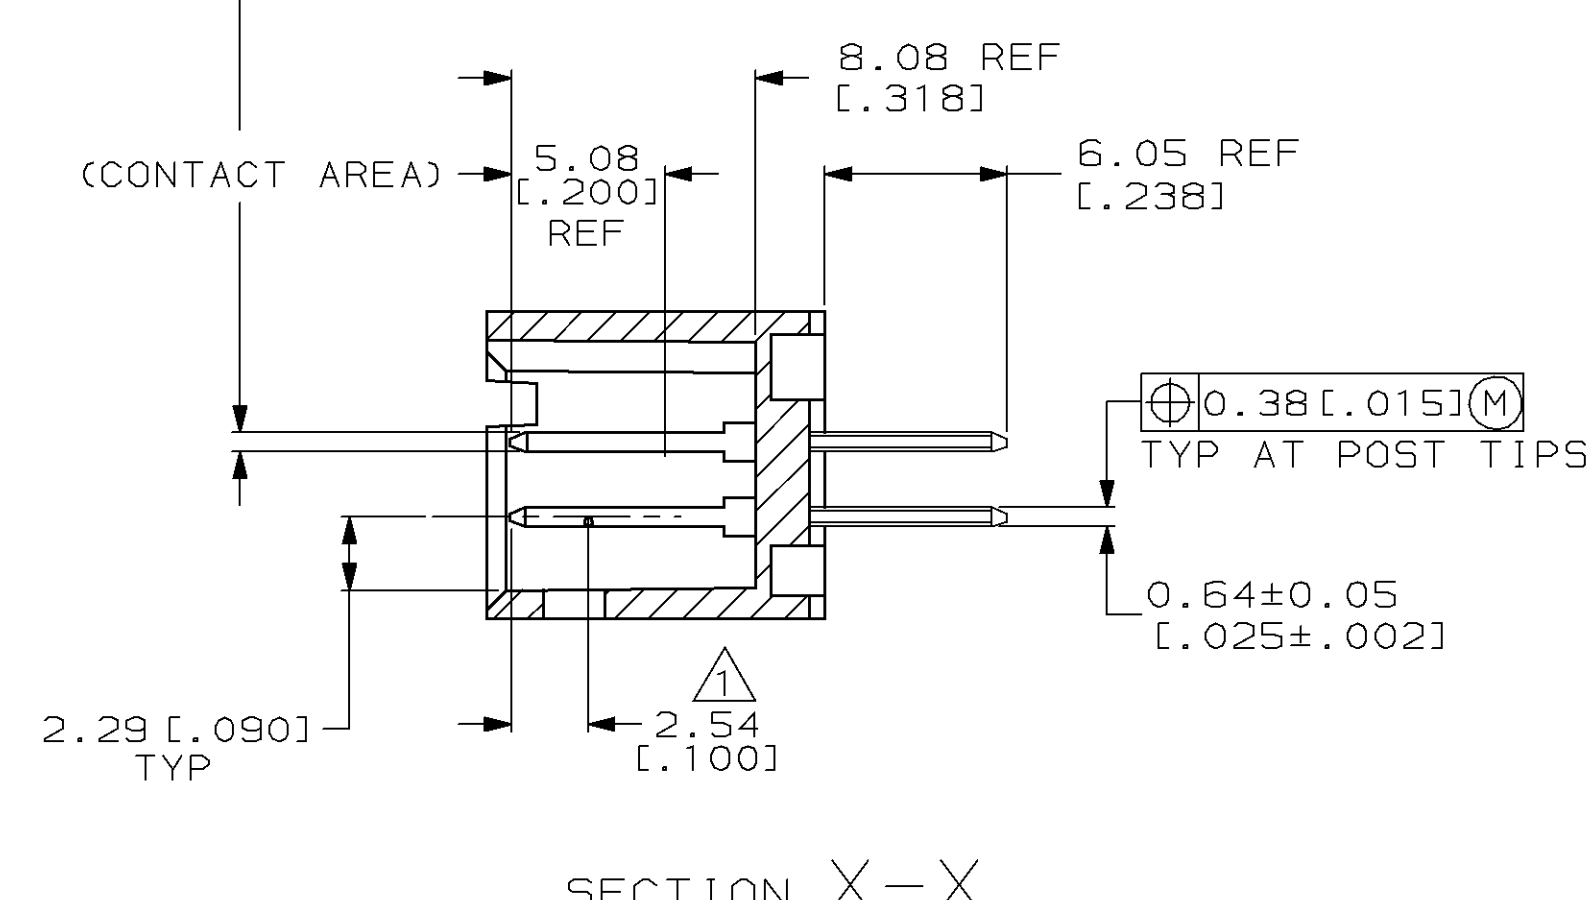

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 2 0.00076 [.000030] GOLD ON CONTACT AREA, GOLD FLASH ON SOLDER AREA, ALL OVER 0.00127 [.000050] MIN NICKEL ON ENTIRE POST.
- 3 HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK
POSTS: PHOS. BRONZE

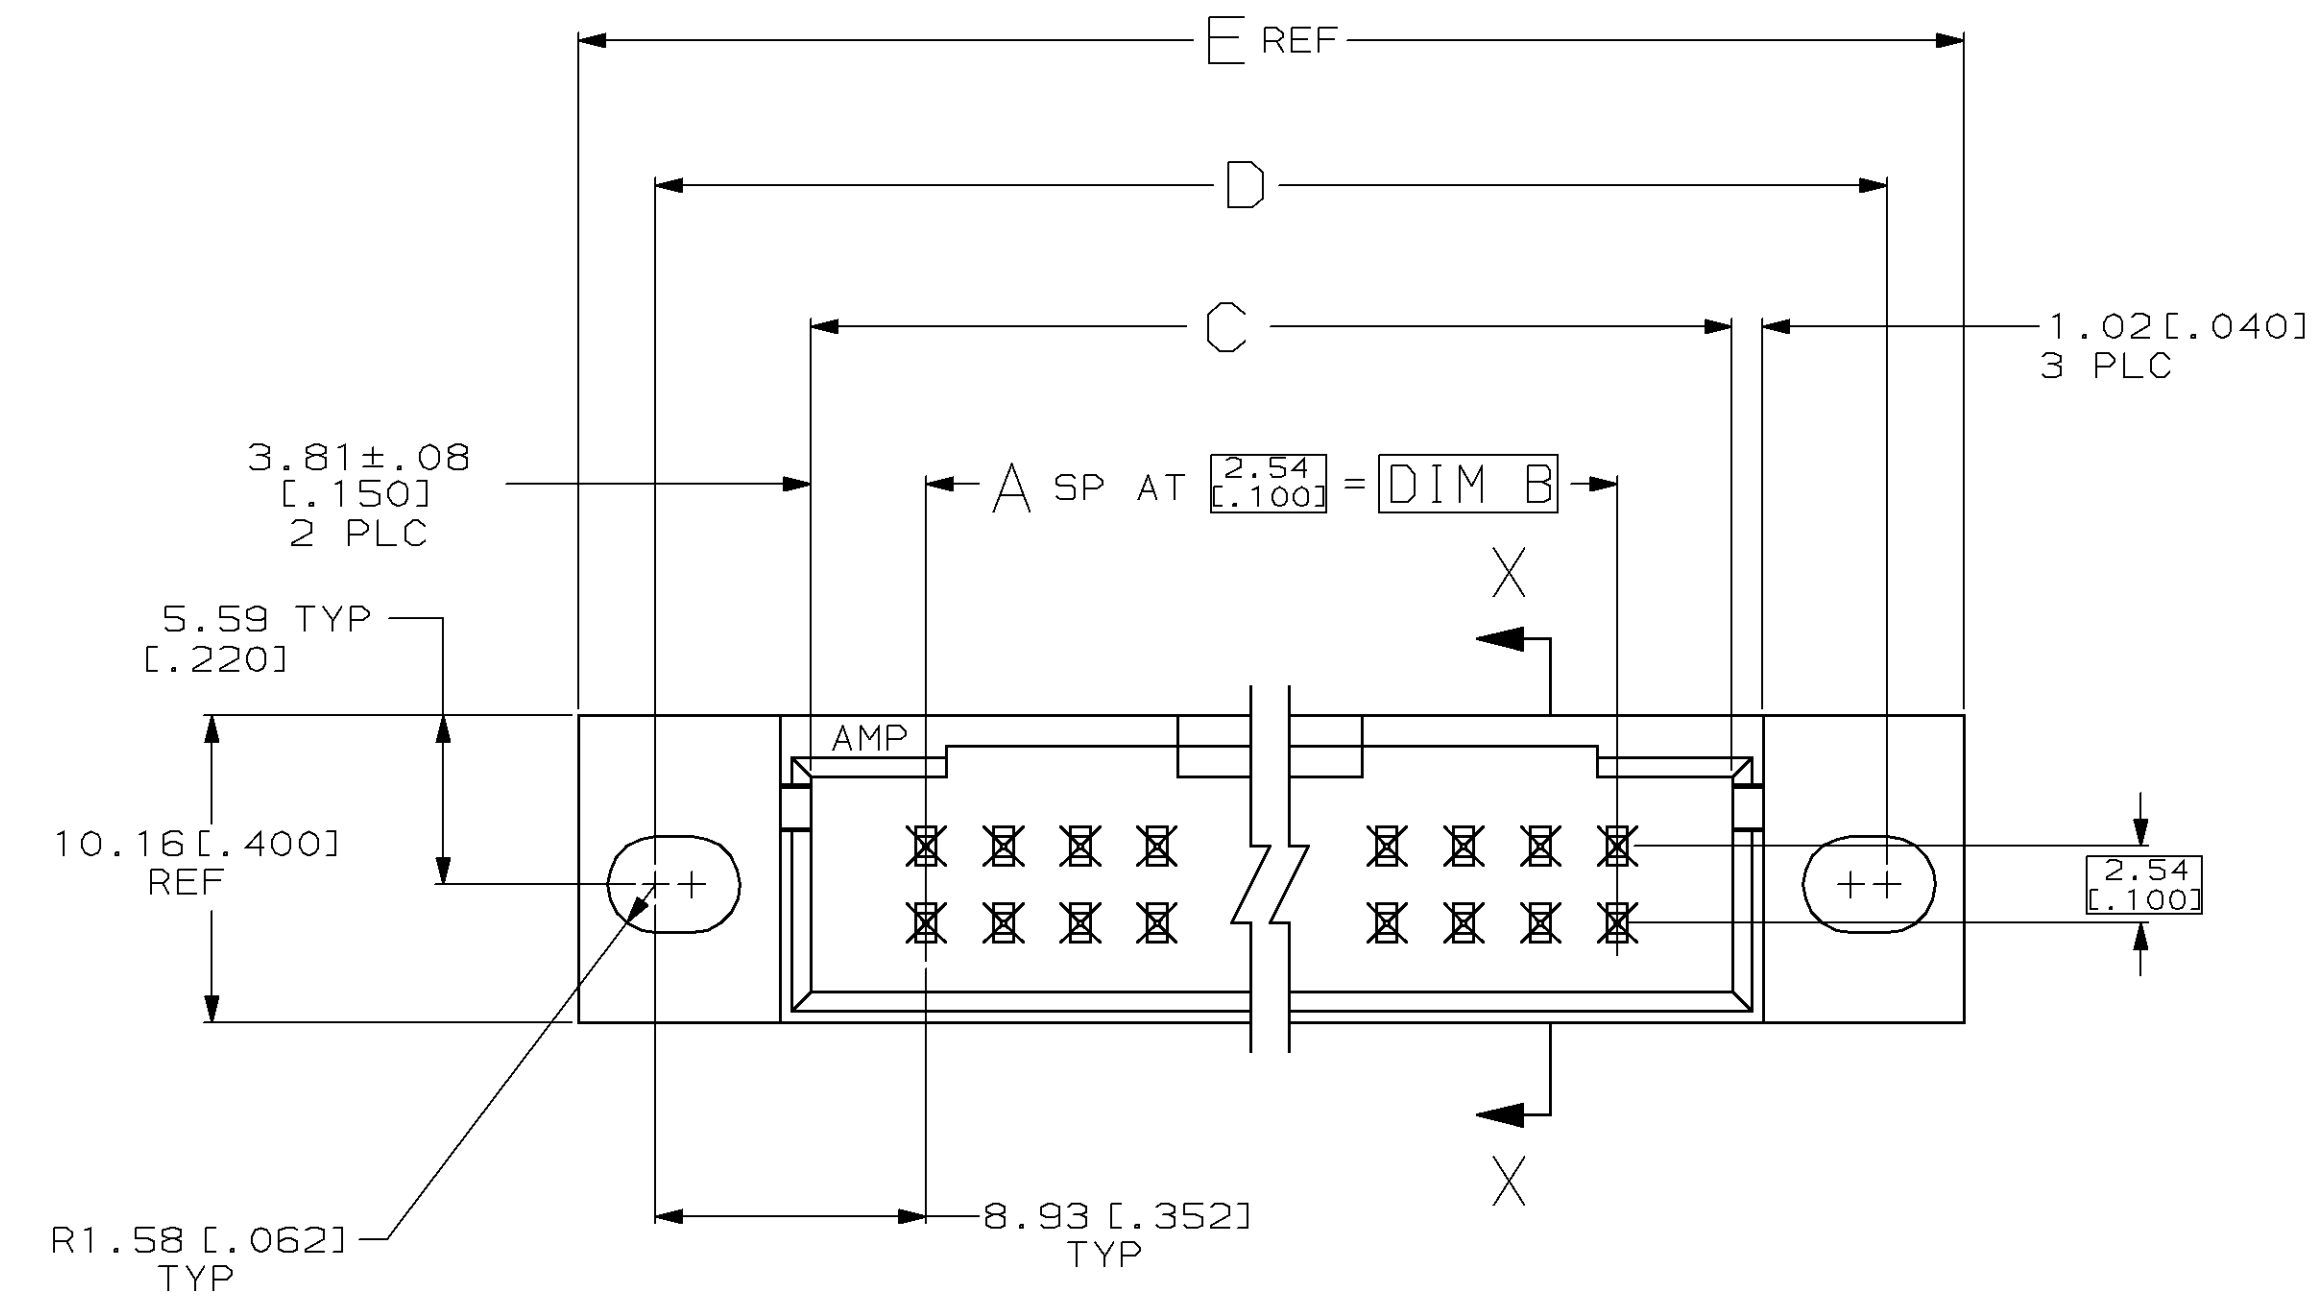

RECOMMENDED HOLE LAYOUT

73.41 [2.890]	4.83 [.190]	96.62 [3.804]	91.54 [3.604]	81.28 [3.200]	73.66 [2.900]	29	60	147003-1
G	F	E	D	C	B	A	NO OF POSN	PART NUMBER

<small>THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING DEPARTMENT SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DATE: 12-FEB-97 DESIGNED BY: E. BRANDBERG CHECKED BY: S. SHUEY DRAWN BY: S. SHUEY DATE: 12-FEB-97	NAME: AMP Incorporated ADDRESS: Harrisburg, PA 17105-3508
DIMENSIONS: mm (INCH)	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.127 (.005) 4 PLC ± ANGLES FINISH	PRODUCT SPEC: APPLICATION SPEC: WEIGHT: - MATERIAL:	PART NAME: HEADER ASSY, MOD 11, 0.64 [.025] SQ POST, DBL ROW, VERTICAL, 2.54 [.100] X 2.54 [.100] \varnothing , WITH MOUNTING EARS AND DETENT SLOTS SIZE: A1 CAGE CODE: 00779 DRAWING NO: C=147003 SCALE: 4:1 SHEET: 11 REV: 0
CUSTOMER DRAWING			