


KEMET, SSHB10HS, Commercial Grade, 1900 uH

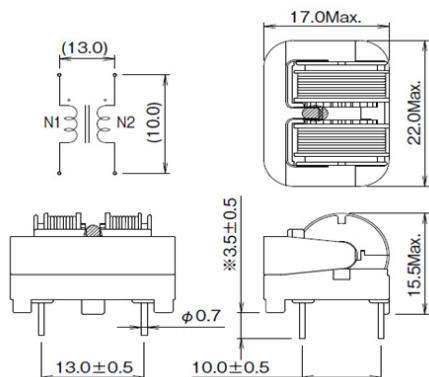

**Dimensions**

|           |                |
|-----------|----------------|
| <b>L</b>  | 22mm MAX       |
| <b>T</b>  | 17mm MAX       |
| <b>H</b>  | 15.5mm MAX     |
| <b>S</b>  | 10mm +/-0.5mm  |
| <b>S1</b> | 13mm NOM       |
| <b>LL</b> | 3.5mm +/-0.5mm |
| <b>F</b>  | 0.7mm NOM      |

**Packaging Specifications**

|                            |      |
|----------------------------|------|
| <b>Weight:</b>             | 10 g |
| <b>Packaging:</b>          | Bulk |
| <b>Packaging Quantity:</b> | 300  |

**General Information**

|                       |   |
|-----------------------|---|
| <b>Series:</b>        | SSHB10HS  |
| <b>Style:</b>         | Through-Hole Choke  |
| <b>Description:</b>   | Common Mode Filter, SS Coils, SSHB10HS, Wide Range Impedance Type |
| <b>RoHS:</b>          | Yes   |
| <b>Miscellaneous:</b> | Temperature Rise Maximum: 50 K                                    |
| <b>Notes:</b>         | Marking: 17 Lot No.   |

**Specifications**

|                               |                 |
|-------------------------------|-----------------|
| <b>Inductance:</b>            | 1.9 mH (10 kHz) |
| <b>Temperature Range:</b>     | -25/+120C       |
| <b>Rated Temperature:</b>     | 120C            |
| <b>Current:</b>               | 1.7 Amps        |
| <b>Voltage AC:</b>            | 250 VAC         |
| <b>Withstanding Voltage:</b>  | 2400 VDC        |
| <b>Insulation Resistance:</b> | 100 MOhms       |