



O.P. (MM)	P.T. (MM)
15.5±0.8	3.3 MAX.

O.P. = OPERATING POINT  
P.T. = PRE-TRAVEL

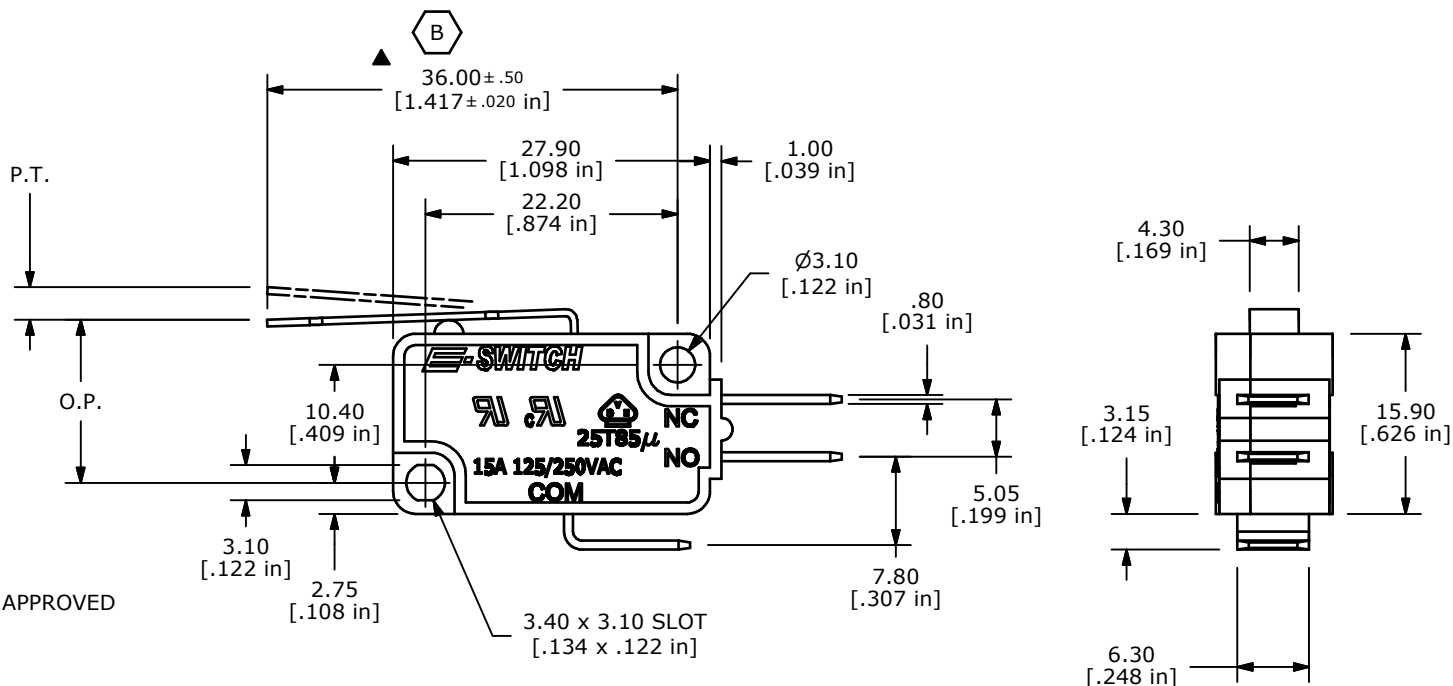

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X±0.4  
X.XX±0.25
  3. RATING: 15A @125/250VAC UL, CUL, VDE APPROVED
  4. OPERATING FORCE: 45±20 GRAMS
  5. OPERATING TEMP: -25°C TO 85°C
  6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
  7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
  8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
  9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
  10. CONTACT RESISTANCE: 100 MILLI -OHMS MAX.
  11. ▲ DENOTES CRITICAL PARAMETER.
  12. 2002/95/EC (ROHS) COMPLIANT



REV	PCR NO	DESCRIPTION	DATE	BY
B	20756	36.00 WAS 36.60, 6.30 WAS 6.35	9/17/12	EBP
A	18082	RELEASED FOR PRODUCTION	5/13/08	BLR

<b>E-SWITCH™</b>				
TITLE LS0851502F045C2A				
SCALE	DATE	DR	DWG	REV
1.5:1	5/13/2008	BLR	Q950054	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED