

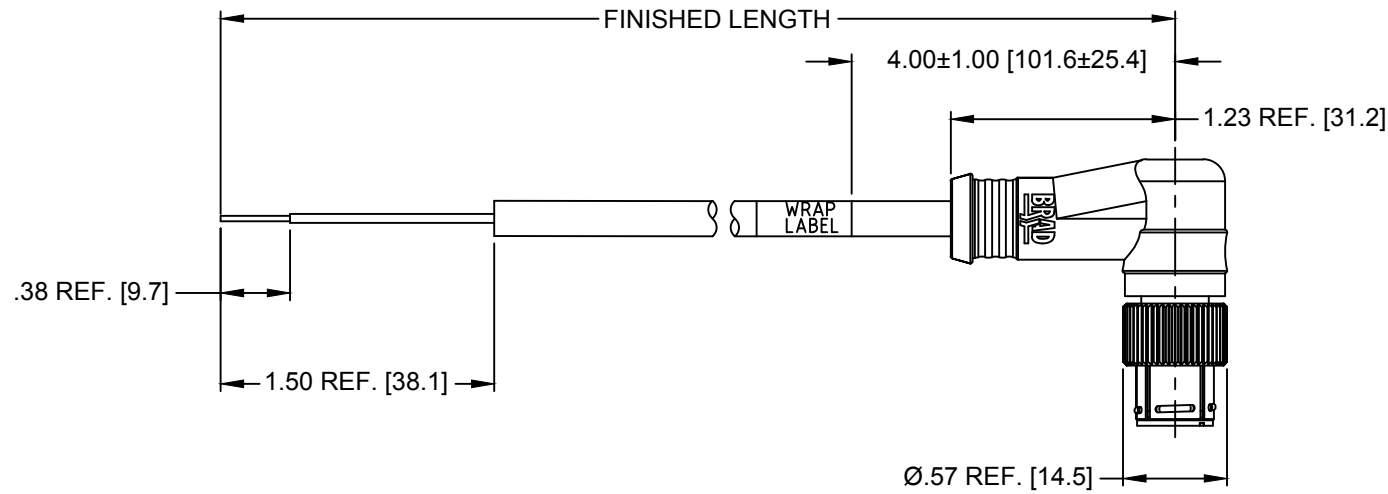


MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1211930007	T05007B30M003	0.3 M +1.9 CM/-0 [1.0' +0.75"/-0]
1211930008	T05007B30M010	1.0 M +5.6 CM/-0 [3.3' +2.19"/-0]

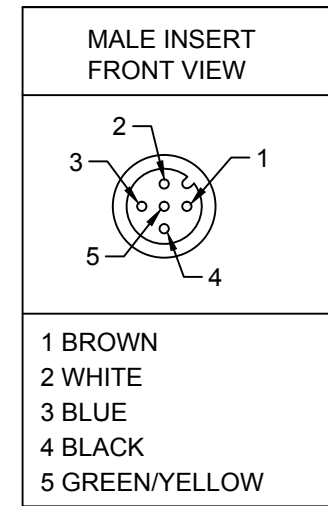

T05007B30M020

WIRE TYPE
0.34mm² [22 AWG] BLACK

CABLE LENGTH
M003----0.3 METER
M020----2 METER
M100----10 METER

MECHANICAL
CONTACT : GOLD/NICKEL OVER COPPER ALLOY
INSERT : BLACK NYLON
COUPLING NUT: NICKEL PLATED COPPER ALLOY
MOLDED BODY: BLACK TPE
CABLE: 0.34mm² [22 AWG] 5 CONDUCTORS BLACK JACKET
WRAP LABEL: MYLAR YELLOW WITH BLACK LETTERS

ELECTRICAL
VOLTAGE RATING: 250V AC/DC
AMPERAGE: 4A

ENVIRONMENTAL
PROTECTION: IP67

OPERATION TEMP: -20°C~80°C

THE RECOMMENDED FEMALE CONNECTOR SHOULD HAVE
NICKEL PLATING ON THE FEMALE THREADS

REVISED FACE VIEW EC NO: IPG2015-1880 DRWN: KJOZWIK 2015/05/05 CHKD: --- APPR: BWOODMAN2014/05/09	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE INCH [MM]	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
	▽=0	4 PLACES mm ±--- INCH ±---	DRAWN BY DATE KJOZWIK 2014/02/13	MIC 5P MALE PUSHLOCK 90 DEGREE BLACK TPU		
	▽=0	3 PLACES mm ±--- INCH ±---	CHECKED BY DATE VOI 2014/04/25			
		2 PLACES mm ±--- INCH ±---	APPROVED BY DATE BWOODMAN 2014/05/09	MOLEX INCORPORATED		
	1 PLACE mm ±--- INCH ±---	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-121193-002			
B	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		