

## Housing - HC-B 6-KML-H-O1PG29 - 1460281

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



HEAVYCON B6 coupling housing, with single locking latch, height: 77.5 mm, with 1 x Pg29 gland, straight cable outlet



### Key commercial data

|                      |          |
|----------------------|----------|
| Packing unit         | 1 pc     |
| Custom tariff number | 85389099 |
| Country of origin    | Germany  |

### Technical data

#### Dimensions

|        |         |
|--------|---------|
| Height | 77.5 mm |
| Width  | 43 mm   |
| Length | 73 mm   |

#### Ambient conditions

|                                      |                   |
|--------------------------------------|-------------------|
| Degree of protection of housing (IP) | IP65              |
| Ambient temperature (operation)      | -40 °C ... 125 °C |

#### General

|                              |  |
|------------------------------|--|
| Note                         | For contact inserts HC-B6, BB10, DD24, M |
| Design                       | B6                                       |
| Housing type                 | Coupling housings                        |
| Locking type                 | With single locking latch                |
| No. of cable exits           | 1  |
| Cable exit                   | Straight                                 |
| Screw connection             | None                                     |
| Type of the screw connection | 1x Pg29                                  |
| Housing material             | Aluminum die-cast                        |

# Housing - HC-B 6-KML-H-O1PG29 - 1460281

## Technical data

### General

|                              |                             |
|------------------------------|-----------------------------|
| Housing surface material     | Powder-coated, gray         |
| Seal material                | NBR                         |
| Material lock                | Stainless steel, handle: PA |
| Material grip body interlock | PA                          |

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |
| eCl@ss 8.0 | 27440209 |

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000437 |
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |


### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31261502 |
| UNSPSC 7.0901 | 31261502 |
| UNSPSC 11     | 31261502 |
| UNSPSC 12.01  | 31261502 |
| UNSPSC 13.2   | 31261502 |

## Drawings

# Housing - HC-B 6-KML-H-O1PG29 - 1460281

Dimensioned drawing

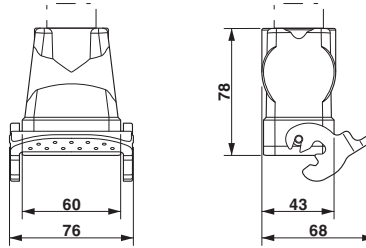

Dimensional drawing